Technical Data Sheet



SP8T Terminated Ramses SMA 3GHz Latching 12Vdc Pins Terminals

PAGE 1/2 | ISSUE 22-03-22 | SERIE : SPNT | PART NUMBER : R574322800

RF CHARACTERISTICS

Number of ways : 8

Frequency range : 0 - 3 GHz Impedance : 50 Ohms

Frequency (GHz)	DC - 3
VSWR max	1,20
Insertion loss max	0.20 dB
Isolation min	80 dB
Average power (*)	240 W

TERMINATION IMPEDANCE : 50 Ohms

TERM. AVG. POWER AT 25° C : 1 W per termination / 3 W total power

ELECTRICAL CHARACTERISTICS

Actuator : LATCHING

Nominal current ** : 320 mA / RESET : 2560 mA ****

Actuator voltage (Vcc) : 12V (10.2 to 13V) / NEGATIVE COMMON
Terminals : solder pins (250°C max. / 30 sec.)

MECHANICAL CHARACTERISTICS

Connectors : SMA female per MIL-C 39012
Life : 2 million cycles per position

Switching Time*** : < 15 msConstruction : Splashproof
Weight : < 280 g

ENVIRONMENTAL CHARACTERISTICS

Operating temperature range : -40°C to +85°C Storage temperature range : -55°C to +85°C

(* Average power at 25°C per RF Path)

(** At 25° C ±10%)

(*** Nominal voltage; 25° C)

(**** Reset : supply voltage time 1sec. max. / duty cycle 10%)




Technical Data Sheet




SP8T Terminated Ramses SMA 3GHz Latching 12Vdc Pins Terminals


PAGE 2/2 ISSUE 22-03-22 SERIE : SPnT PART NUMBER : R574322800

DRAWING

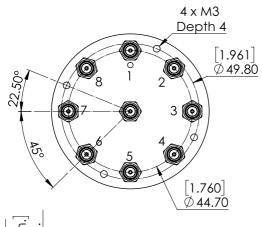


Voltage	RF Continuity
-C +RESET	All ports open
-C +1	$IN \leftrightarrow 1$
-C +2	$IN \leftrightarrow 2$
-C +3	$IN \leftrightarrow 3$
-C +4	$IN \leftrightarrow 4$
-C +5	$IN \leftrightarrow 5$
-C +6	IN ↔ 6
-C +7	$IN \leftrightarrow 7$
-C +8	$IN \leftrightarrow 8$

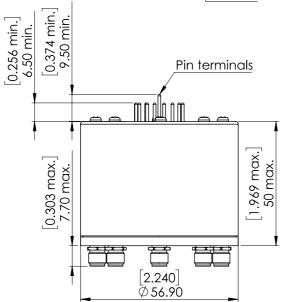

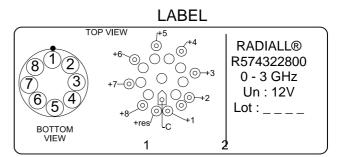

General tolerances: ±0,5 mm [0,02 in]

SCHEMATIC DIAGRAM

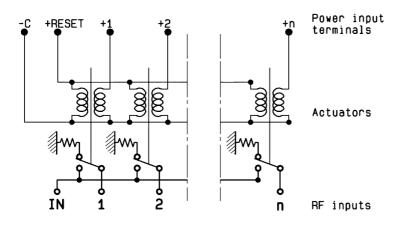

This document contains proprietary information and such information shall not be disclosed to any third party for any purpose whatsoever or used for manufacturing purposes without prior written agreement from Radiall. The data defined in this document are given as an indication, in the effort to improve our products; we reserve the right to make any changes judged necessary.