

PCB terminal block; lever; 4 mm²; Pin spacing 5 mm; 2-pole; Push-in CAGE

CLAMP®; 4,00 mm²; gray

www.wago.com/2604-1102



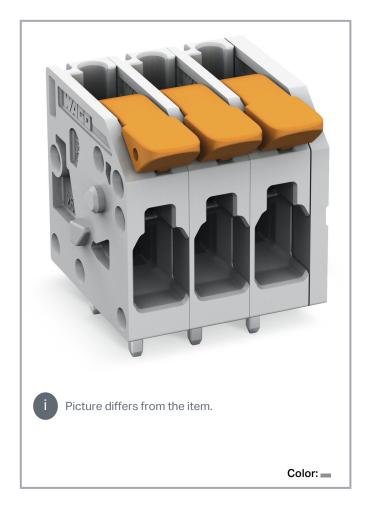


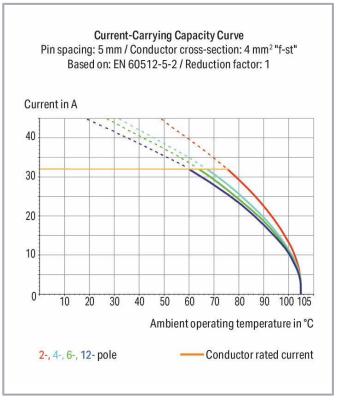

 $\label{thm:continuity} \textbf{Subject to changes. Please also observe the further product documentation!}$ 

www.wago.com/2604-1102



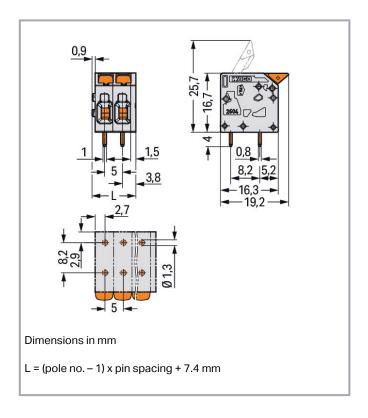

### Item description

- PCB terminal blocks with Push-in CAGE CLAMP® connection and levers
- Push-in termination of solid and ferruled conductors
- Intuitive and tool-free operation
- Several clamping units can be held open simultaneously, simplifying the connection of multi-core cables
- Testing can be performed both parallel and perpendicular to conductor entry

# Data Notes

Variants:

Other pole numbers Direct marking Other colors

Other versions (or variants) can be requested from WAGO Sales or configured at https://configurator.wago.com/.

#### **Electrical data**

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG Hansastr. 27 32423 Minden

Phone: +49571 887-0 | Fax: +49571 887-169 Email: info.de@wago.com | Web: www.wago.com Do you have any questions about our products? We are always happy to take your call at +49 (571) 887-44222.

www.wago.com/2604-1102



## Ratings per IEC/EN

Ratings per	IEC/EN 60664-1
Nominal voltage (III/3)	320 V
Rated impulse voltage (III/3)	4 kV
Rated voltage (III/2)	400 V
Rated impulse voltage (III/2)	4 kV
Nominal voltage (II/2)	630 V
Rated surge voltage (II/2)	4 kV
Rated current	32 A
Legend (ratings)	(III / 2) ≙ Overvoltage category III / Pollution degree 2

# Ratings per UL 1059

Approvals per	UL 1059
Rated voltage UL (Use Group B)	300 V
Rated current UL (Use Group B)	20 A
Rated voltage UL (Use Group D)	300 V
Rated current UL (Use Group D)	10 A

# Ratings per CSA

Approvals per	CSA
Rated voltage CSA (Use Group B)	300 V
Rated current CSA (Use Group B)	20 A
Rated voltage CSA (Use Group D)	300 V
Rated current CSA (Use Group D)	5 A

## Connection data

Connection points	2
Total number of potentials	2
Number of connection types	1
Number of levels	1

# Connection 1

Connection technology	Push-in CAGE CLAMP®
Actuation type	Lever
Solid conductor	0.2 4 mm² / 24 12 AWG

 $\label{thm:condition} \textbf{Subject to changes. Please also observe the further product documentation!}$ 

WAGO GmbH & Co. KG

Hansastr. 27 32423 Minden

Phone: +49571 887-0 | Fax: +49571 887-169 Email: info.de@wago.com | Web: www.wago.com Do you have any questions about our products?

We are always happy to take your call at +49 (571) 887-44222.

www.wago.com/2604-1102



Fine-stranded conductor	0.2 4 mm <sup>2</sup> / 24 12 AWG
Fine-stranded conductor; with insulated ferrule	0.25 2.5 mm²
Fine-stranded conductor; with uninsulated ferrule	0.25 2.5 mm²
Fine-stranded conductor; with twin ferrule	0.25 1.5 mm²
Strip length	9 11 mm / 0.35 0.43 inches
Conductor connection direction to PCB	0 °
Pole number	2

# Physical data

Pin spacing	5 mm / 0.197 inches
Width	12.4 mm / 0.488 inches
Height	20.7 mm / 0.815 inches
Height from the surface	16.7 mm / 0.657 inches
Depth	19.2 mm / 0.756 inches
Solder pin length	4 mm
Solder pin dimensions	0.8 x 1 mm
Drilled hole diameter with tolerance	1.3 <sup>(±0.1)</sup> mm

#### **PCB** contact

PCB contact	THT
Solder pin arrangement	over the entire terminal strip (in-line)
Number of solder pins per potential	2

#### **Material Data**

Note (material data)

Information on material specifications can be found here

Color	gray
Material group	1
Insulation material	Polyamide (PA66)
Flammability class per UL94	V0
Clamping spring material	Chrome-nickel spring steel (CrNi)
Contact material	Electrolytic copper (E <sub>Cu</sub> )
Contact plating	Tin
Fire load	0.038 MJ
Actuator color	orange

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG

Hansastr. 27 32423 Minden

Phone: +49571 887-0 | Fax: +49571 887-169 Email: info.de@wago.com | Web: www.wago.com Do you have any questions about our products?

We are always happy to take your call at +49 (571) 887-44222.

www.wago.com/2604-1102

32423 Minden

Phone: +49571 887-0 | Fax: +49571 887-169 Email: info.de@wago.com | Web: www.wago.com



Weight		3.2 g	
Environme	ntal requirements		
Limit tempe	erature range	-60 +105 °C	
Processing	temperature	-35 +60 °C	
Continuous	operating temperature	-60 +105 °C	
Commercia	al data		
eCl@ss 10.0	0	27-44-04-01	
eCl@ss 9.0		27-44-04-01	
ETIM 8.0		EC002643	
ETIM 7.0		EC002643	
PU (SPU)		200 pcs	
Packaging t	уре	box	
Country of o	origin	DE	
GTIN		4055143564298	
Customs ta	riff number	85369010000	
General appro			Certificate
Logo	Approval	Additional Approval Text	name
	CB DEKRA Certification B.V.	EN 60947-7-4	NL-47057
<b>(1)</b>	CSA DEKRA Certification B.V.	C22.2 No. 158	70117145
c <b>911</b> us	<b>cURus</b> Underwriters Laboratories Inc.	UL 1059	E45172
KEMA	KEMA/KEUR DEKRA Certification B.V.	EN 60947-7-4	71- 100535
Subject to cha	anges. Please also observe the further product	documentation!	
WAGO GmbH Hansastr. 27	& Co. KG	Do you have any questions about our produ We are always happy to take your call at +49	



#### Optional accessories

Ferrule		
1	Item no.: 216-108 Ferrule; Sleeve for 6 mm² / AWG 10; uninsulated; electro-tin plated; silver-colored	www.wago.com/216-108
	Item no.: 216-208 Ferrule; Sleeve for 6 mm² / AWG 10; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90; yellow	www.wago.com/216-208
	Item no.: 216-263 Ferrule; Sleeve for 1 mm² / AWG 18; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90; red	www.wago.com/216-263
l	Item no.: 216-266 Ferrule; Sleeve for 2.5 mm² / AWG 14; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90; blue	www.wago.com/216-266
L	Item no.: 216-264 Ferrule; Sleeve for 1.5 mm² / AWG 16; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90; black	www.wago.com/216-264
	Item no.: 216-267 Ferrule; Sleeve for 4 mm² / AWG 12; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90; gray	www.wago.com/216-267

#### **Downloads**

### **Documentation**

### **Additional Information**

Technical Section	2019 Apr 3	pdf	Download
Technical explanations		2.0 MB	

### CAD/CAE-Data

#### CAD data

2D/3D Models 2604-1102	URL	Download
------------------------	-----	----------

## **PCB** Design

Symbol and Footprint 2604-1102 URL Download

CAx data for your PCB design, consisting of "schematic symbols and PCB footprints", allow easy integration of the WAGO component into your development environment.

#### Supported formats:

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG Hansastr. 27

32423 Minden

Phone: +49571 887-0 | Fax: +49571 887-169 Email: info.de@wago.com | Web: www.wago.com Do you have any questions about our products? We are always happy to take your call at +49 (571) 887-44222.

www.wago.com/2604-1102



- Accel EDA 14 & 15
- Altium 6 to current version
- Cadence Allegro
- DesignSpark
- **Eagle Libraries**
- KiCad
- Mentor Graphics BoardStation
- Mentor Graphics Design Architect
- Mentor Graphics Design Expedition 99 and 2000
- OrCAD 9.X PCB and Capture
- PADS PowerPCB 3, 3.5, 4.X, and 5.X
- PADS PowerPCB and PowerLogic 3.0
- PCAD 2000, 2001, 2002, 2004, and 2006
- Pulsonix 8.5 or newer
- STL
- 3D STEP
- **TARGET 3001!**
- View Logic ViewDraw
- Quadcept
- Zuken CadStar 3 and 4
- Zuken CR-5000 and CR-8000

PCB Component Libraries (EDA), PCB CAD Library Ultra Librarian

#### **CAE** data

**ZUKEN Portal 2604-1102** URL Download

#### **Environmental Product Compliance**

#### Compliance Search

**Environmental Product Compliance 2604-1102** PCB terminal block; lever; 4 mm<sup>2</sup>; Pin spacing 5 mm; 2-pole; Push-in CAGE CLAMP<sup>®</sup>;

4,00 mm<sup>2</sup>; gray

## Installation Notes

### Conductor termination

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG

Hansastr. 27 32423 Minden

Phone: +49571 887-0 | Fax: +49571 887-169 Email: info.de@wago.com | Web: www.wago.com

Do you have any questions about our products? We are always happy to take your call at +49 (571) 887-44222.


05.06.2023 Page 7/8

Download

URL


www.wago.com/2604-1102



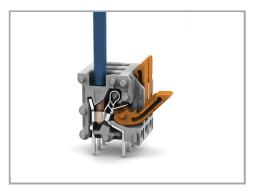

Insert fine-stranded conductors – and remove all conductors – via operating tool.

#### Conductor termination



Insert solid conductors via push-in termination.

 $\label{thm:condition} \textbf{Subject to changes. Please also observe the further product documentation!}$