

TC53

Voltage Detector

Features:

• Highly Accurate: ±2%

• Low-Power Consumption: 1.0μA, Typ.

Detect Voltage Range: 1.6V to 6.0V and 7.7V

• Operating Voltage: 1.5V to 10.0V

• Output Configuration: Open-Drain or CMOS

• Space-Saving 5-Pin SOT-23A Package

Typical Applications:

· Microprocessor Reset Circuits

 Battery Life Monitors and Recharge Voltage Monitors

· Memory Battery Backup Circuitry

· Power-On Reset Circuits

Power Failure Detection


· Delay Circuitry

Device Selection Table

| Part Number | Package | Temp. Range |
|-----------------|---------------|----------------|
| TC53-xxxxxxxxxx | 5-Pin SOT-23A | -40°C to +85°C |

Other output voltages are available. Please contact Microchip Technology Inc. for details.


Package Type

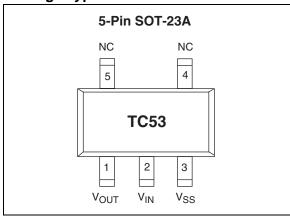

General Description:

The TC53 is a low-power voltage detector. Typical supply current consumption is only $1\mu A$ at an input voltage of 2V. The voltage detection threshold setting is factory-programmed and ensured to $\pm 2\%$ accuracy. Threshold settings are available over a range of 1.6V to 6.0V. The TC53 has both complementary (CMOS) and open drain (NMOS) output configuration options. TC53 is the ideal voltage detector for precision applications in which small size, low installed cost, high accuracy and low supply current consumption are critical.

Functional Block Diagram

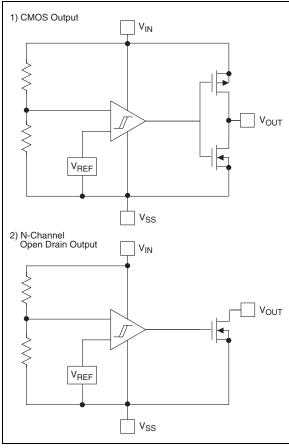

1.0 ELECTRICAL CHARACTERISTICS

Absolute Maximum Ratings†

 $\label{eq:local_$

†Stresses above those listed under "Absolute Maximum Ratings" may cause permanent damage to the device. These are stress ratings only and functional operation of the device at these or any other conditions above those indicated in the operation sections of the specifications is not implied. Exposure to Absolute Maximum Rating conditions for extended periods may affect device reliability.

TC53 ELECTRICAL SPECIFICATIONS

Electrical Characteristics: T_A = 25°C, unless otherwise specified.

| Symbol | Parameter | Min | Тур | Max | Units | Test Conditions | |
|--|---|------------------------|------------------------------------|---------------------------------|--------|---|--|
| V _{DF} | Detect Voltage | V _T x 0.98 | V _T ±0.5% | V _T x 1.02 | V | Note 3 | |
| V _{HYS} | Hysteresis Range | V _{DF} x 0.02 | V _{DF} x 0.05 | V _{DF} x 0.08 | V | | |
| I _{SS} | Supply Current | _ _ _ _ _ | 0.9 1.0 1.3 1.6 2.0 | 2.6 3.0 3.4 3.8 4.2 | μА | $V_{IN} = 1.5V$ $V_{IN} = 2.0V$ $V_{IN} = 3.0V$ $V_{IN} = 4.0V$ $V_{IN} = 5.0V$ | |
| V _{IN} | Operating Voltage | 1.5 | _ | 10.0 | V | V _{DF} = 2.1 to 6.0V | |
| I _{OUT} | Output Current | _ _ _ _ _ | 2.2 7.7 10.1 11.5 13.0 | _ _ _ _ _ | mA | N-ch; $V_{DS} = 0.5V$, $V_{IN} = 1.0V$ $V_{IN} = 2.0V$ $V_{IN} = 3.0V$ $V_{IN} = 4.0V$ $V_{IN} = 5.0V$ | |
| | | _ | -10.0 | _ | | P-ch; $V_{DS} = 2.1V$, $V_{IN} = 8.0V$ (CMOS Output) | |
| ΔV _{DF} / (ΔT _{OPR} V _{DF}) | Temperature Characteristics | _ | ±100 | _ | ppm/°C | | |
| t _{DLY} | Delay Time $(V_{DR} \rightarrow V_{OUT} \text{ Inversion})$ | _ | _ | 0.2 | ms | | |

Note 1: An additional resistor between the V_{IN} pin and the supply voltage may alter the electrical characteristics due to the increasing values of

3: V_T is the factory-programmed voltage detection threshold.

^{2:} The power consumption during power-start to output being stable (release operation) is 2μA greater than it is after that period (completion of release operation) because of rush current in the delay circuit.

2.0 PIN DESCRIPTIONS


The descriptions of the pins are listed in Table 2-1.

TABLE 2-1: PIN FUNCTION TABLE

| Pin No. (5-Pin SOT-23A) | Symbol | Description |
|----------------------------|-------------------|-----------------------|
| 1 | V _{OUT1} | Output. |
| 2 | V_{IN} | Supply voltage input. |
| 3 | V_{SS} | Ground terminal. |
| 4 | NC | Not connected. |
| 5 | NC | Not connected. |


3.0 DETAILED DESCRIPTION


FIGURE 3-1: TIMING DIAGRAM

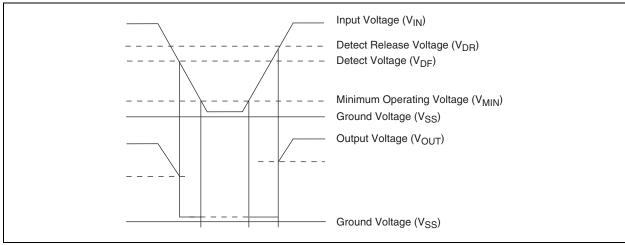


PACKAGING INFORMATION 4.0

4.1 **Package Marking Information**





Example



Legend: XX...X Customer-specific information

Year code (last digit of calendar year) ΥY Year code (last 2 digits of calendar year) WW Week code (week of January 1 is week '01')

NNN Alphanumeric traceability code


(e3) Pb-free JEDEC designator for Matte Tin (Sn)

This package is Pb-free. The Pb-free JEDEC designator (@3)

can be found on the outer packaging for this package.

Note:

In the event the full Microchip part number cannot be marked on one line, it will be carried over to the next line, thus limiting the number of available characters for customer-specific information.

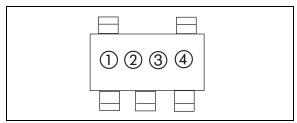

① represents output configuration and first integer of voltage

| Symbol | Output | Voltage |
|--------|--------|---------|
| Α | CMOS | 0. |
| В | CMOS | 1. |
| С | CMOS | 2. |
| D | CMOS | 3. |
| E | CMOS | 4. |
| F | CMOS | 5. |
| Н | CMOS | 6. |

| Symbol | Output | Voltage |
|--------|--------|---------|
| K | Nch | 0. |
| L | Nch | 1. |
| M | Nch | 2. |
| N | Nch | 3. |
| Р | Nch | 4. |
| R | Nch | 5. |
| S | Nch | 6. |


② represents first decimal of output voltage

| Symbol | Voltage |
|--------|---------|
| 0 | .0 |
| 1 | .1 |
| 2 | .2 |
| 3 | .3 |
| 4 | .4 |
| 5 | .5 |
| 6 | .6 |
| 7 | .7 |
| 8 | .8 |
| 9 | .9 |

- ③ represents delay function and delay time 3 = no delay function
- ④ represents assembly lot code

5-Lead Plastic Small Outline Transistor (CT) [SOT-23]

Note: For the most current package drawings, please see the Microchip Packaging Specification located at http://www.microchip.com/packaging

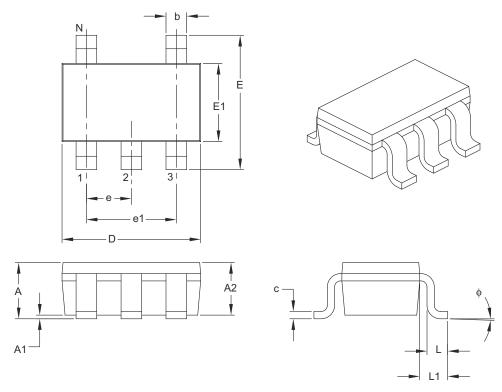

| | MILLIMETERS | | | | |
|--------------------------|------------------|----------|-----|------|--|
| | Dimension Limits | MIN | NOM | MAX | |
| Number of Pins | N | 5 | | | |
| Lead Pitch | е | 0.95 BSC | | | |
| Outside Lead Pitch | e1 | | | | |
| Overall Height | A | 0.90 | _ | 1.45 | |
| Molded Package Thickness | A2 | 0.89 | _ | 1.30 | |
| Standoff | A1 | 0.00 | _ | 0.15 | |
| Overall Width | E | 2.20 | _ | 3.20 | |
| Molded Package Width | E1 | 1.30 | _ | 1.80 | |
| Overall Length | D | 2.70 | _ | 3.10 | |
| Foot Length | L | 0.10 | _ | 0.60 | |
| Footprint | L1 | 0.35 | _ | 0.80 | |
| Foot Angle | ф | 0° | _ | 30° | |
| Lead Thickness | С | 0.08 | _ | 0.26 | |
| Lead Width | b | 0.20 | _ | 0.51 | |

Notes:


- 1. Dimensions D and E1 do not include mold flash or protrusions. Mold flash or protrusions shall not exceed 0.127 mm per side.
- 2. Dimensioning and tolerancing per ASME Y14.5M.

BSC: Basic Dimension. Theoretically exact value shown without tolerances.

Microchip Technology Drawing C04-091B

5-Lead Plastic Small Outline Transistor (CT) [SOT-23]

Note: For the most current package drawings, please see the Microchip Packaging Specification located at http://www.microchip.com/packaging

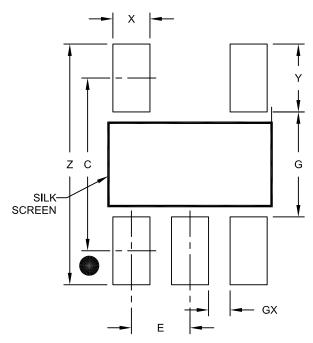

RECOMMENDED LAND PATTERN

| | N | IILLIMETER | S | | |
|-------------------------|-----|-------------------|------|------|--|
| Dimension | MIN | NOM | MAX | | |
| Contact Pitch | E | 0.95 BSC | | | |
| Contact Pad Spacing | С | | 2.80 | | |
| Contact Pad Width (X5) | Х | | | 0.60 | |
| Contact Pad Length (X5) | Υ | | | 1.10 | |
| Distance Between Pads | G | 1.70 | | | |
| Distance Between Pads | GX | 0.35 | | | |
| Overall Width | Z | | | 3.90 | |

Notes:

1. Dimensioning and tolerancing per ASME Y14.5M

BSC: Basic Dimension. Theoretically exact value shown without tolerances.

Microchip Technology Drawing No. C04-2091A

| 1 | • |
|--------|----|
| 11.7.5 | ١. |
| | • |

NOTES:

APPENDIX A: REVISION HISTORY

Revision D (August 2011)

• Changed status from active to end-of-life (EOL)

Revision C (July 2002

• Undocumented changes

Revision B (May 2002)

• Undocumented changes

Revision A (March 2001)

• Original Release of this Document.

| _ |
|-------|
| |
| 7 |
| |

NOTES:

PRODUCT IDENTIFICATION SYSTEM

To order or obtain information, e.g., on pricing or delivery, refer to the factory or the listed sales office.

| Device: TC53: Low-power voltage detector Device: TC53: Low-power voltage detector Output N = NMOS | PART NO. X | XX XX XX | XX XX | Exa | amples: | |
|---|-------------------|------------------------------|-------|-----|-----------------|---|
| Detected Voltage: 22 = 2.2V 27 = 2.7V 29 = 2.9V Tolerance: 02 = ±2% Temperature Range: 12% tolerance, Extended Temperature 5LD SOT-23A, Standard Tapping. c) TC53N2902ECTTR: NMOS, 2.9V, ±2% tolerance, Extended Temperature 5LD SOT-23A, Standard Tapping. | | | | a) | TC53C2202ECTTR: | ±2% tolerance, Extended Temperature, 5LD SOT-23A, |
| Detected Voltage: 22 = 2.2V | Output | N = NMOS | | b) | TC53N2702ECTTR: | ±2% tolerance, Extended Temperature, 5LD SOT-23A, |
| Temperature E = -40°C to+125°C(Extended) Range: | | 22 = 2.2V 27 = 2.7V | | c) | TC53N2902ECTTR: | ±2% tolerance, Extended Temperature, 5LD SOT-23A, |
| Range: | Tolerance: | 02 = ±2% | | | | |
| Package: CT: 5-Pin SOT-23A Package | | E = -40°C to+125°C(Extended) | | | | |
| | Package: | CT: 5-Pin SOT-23A Package | | | | |
| Taping Direction: TR: Standard Taping | Taping Direction: | TR: Standard Taping | | | | |

| 1 | • |
|--------|----|
| 11.7.5 | ١. |
| | • |

NOTES:

Note the following details of the code protection feature on Microchip devices:

- · Microchip products meet the specification contained in their particular Microchip Data Sheet.
- Microchip believes that its family of products is one of the most secure families of its kind on the market today, when used in the
 intended manner and under normal conditions.
- There are dishonest and possibly illegal methods used to breach the code protection feature. All of these methods, to our
 knowledge, require using the Microchip products in a manner outside the operating specifications contained in Microchip's Data
 Sheets. Most likely, the person doing so is engaged in theft of intellectual property.
- Microchip is willing to work with the customer who is concerned about the integrity of their code.
- Neither Microchip nor any other semiconductor manufacturer can guarantee the security of their code. Code protection does not mean that we are guaranteeing the product as "unbreakable."

Code protection is constantly evolving. We at Microchip are committed to continuously improving the code protection features of our products. Attempts to break Microchip's code protection feature may be a violation of the Digital Millennium Copyright Act. If such acts allow unauthorized access to your software or other copyrighted work, you may have a right to sue for relief under that Act.

Information contained in this publication regarding device applications and the like is provided only for your convenience and may be superseded by updates. It is your responsibility to ensure that your application meets with your specifications. MICROCHIP MAKES NO REPRESENTATIONS OR WARRANTIES OF ANY KIND WHETHER EXPRESS OR IMPLIED, WRITTEN OR ORAL, STATUTORY OR OTHERWISE, RELATED TO THE INFORMATION, INCLUDING BUT NOT LIMITED TO ITS CONDITION, QUALITY, PERFORMANCE, MERCHANTABILITY OR FITNESS FOR PURPOSE. Microchip disclaims all liability arising from this information and its use. Use of Microchip devices in life support and/or safety applications is entirely at the buyer's risk, and the buyer agrees to defend, indemnify and hold harmless Microchip from any and all damages, claims, suits, or expenses resulting from such use. No licenses are conveyed, implicitly or otherwise, under any Microchip intellectual property rights.

Trademarks

The Microchip name and logo, the Microchip logo, dsPIC, KEELOQ, KEELOQ logo, MPLAB, PIC, PICmicro, PICSTART, PIC³² logo, rfPIC and UNI/O are registered trademarks of Microchip Technology Incorporated in the U.S.A. and other countries.

FilterLab, Hampshire, HI-TECH C, Linear Active Thermistor, MXDEV, MXLAB, SEEVAL and The Embedded Control Solutions Company are registered trademarks of Microchip Technology Incorporated in the U.S.A.

Analog-for-the-Digital Age, Application Maestro, chipKIT, chipKIT logo, CodeGuard, dsPICDEM, dsPICDEM.net, dsPICworks, dsSPEAK, ECAN, ECONOMONITOR, FanSense, HI-TIDE, In-Circuit Serial Programming, ICSP, Mindi, MiWi, MPASM, MPLAB Certified logo, MPLIB, MPLINK, mTouch, Omniscient Code Generation, PICC, PICC-18, PICDEM, PICDEM.net, PICkit, PICtail, REAL ICE, rfLAB, Select Mode, Total Endurance, TSHARC, UniWinDriver, WiperLock and ZENA are trademarks of Microchip Technology Incorporated in the U.S.A. and other countries.

SQTP is a service mark of Microchip Technology Incorporated in the U.S.A.

All other trademarks mentioned herein are property of their respective companies.

© 2001-2011, Microchip Technology Incorporated, Printed in the U.S.A., All Rights Reserved.

Printed on recycled paper.

ISBN: 978-1-61341-465-1

QUALITY MANAGEMENT SYSTEM

CERTIFIED BY DNV

ISO/TS 16949:2009

Microchip received ISO/TS-16949:2009 certification for its worldwide headquarters, design and wafer fabrication facilities in Chandler and Tempe, Arizona; Gresham, Oregon and design centers in California and India. The Company's quality system processes and procedures are for its PIC® MCUs and dsPIC® DSCs, KEELOQ® code hopping devices, Serial EEPROMs, microperipherals, nonvolatile memory and analog products. In addition, Microchip's quality system for the design and manufacture of development systems is ISO 9001:2000 certified.



Worldwide Sales and Service

AMERICAS

Corporate Office 2355 West Chandler Blvd.

2355 West Chandler Blvd. Chandler, AZ 85224-6199 Tel: 480-792-7200 Fax: 480-792-7277

Technical Support: http://www.microchip.com/

support

Web Address: www.microchip.com

Atlanta

Duluth, GA Tel: 678-957-9614 Fax: 678-957-1455

Boston

Westborough, MA Tel: 774-760-0087 Fax: 774-760-0088

Chicago Itasca, IL

Tel: 630-285-0071 Fax: 630-285-0075

Cleveland

Independence, OH Tel: 216-447-0464 Fax: 216-447-0643

Dallas

Addison, TX Tel: 972-818-7423 Fax: 972-818-2924

Detroit

Farmington Hills, MI Tel: 248-538-2250 Fax: 248-538-2260

Indianapolis

Noblesville, IN Tel: 317-773-8323 Fax: 317-773-5453

Los Angeles

Mission Viejo, CA Tel: 949-462-9523 Fax: 949-462-9608

Santa Clara

Santa Clara, CA Tel: 408-961-6444 Fax: 408-961-6445

Toronto

Mississauga, Ontario,

Canada

Tel: 905-673-0699 Fax: 905-673-6509

ASIA/PACIFIC

Asia Pacific Office

Suites 3707-14, 37th Floor Tower 6, The Gateway Harbour City, Kowloon Hong Kong

Tel: 852-2401-1200 Fax: 852-2401-3431

Australia - Sydney

Tel: 61-2-9868-6733 Fax: 61-2-9868-6755

China - Beijing

Tel: 86-10-8569-7000 Fax: 86-10-8528-2104

China - Chengdu

Tel: 86-28-8665-5511 Fax: 86-28-8665-7889

China - Chongqing

Tel: 86-23-8980-9588 Fax: 86-23-8980-9500

China - Hangzhou

Tel: 86-571-2819-3187 Fax: 86-571-2819-3189

China - Hong Kong SAR

Tel: 852-2401-1200 Fax: 852-2401-3431

China - Nanjing

Tel: 86-25-8473-2460 Fax: 86-25-8473-2470

China - Qingdao

Tel: 86-532-8502-7355 Fax: 86-532-8502-7205

China - Shanghai

Tel: 86-21-5407-5533 Fax: 86-21-5407-5066

China - Shenyang

Tel: 86-24-2334-2829 Fax: 86-24-2334-2393

China - Shenzhen

Tel: 86-755-8203-2660 Fax: 86-755-8203-1760

China - Wuhan

Tel: 86-27-5980-5300 Fax: 86-27-5980-5118

China - Xian

Tel: 86-29-8833-7252 Fax: 86-29-8833-7256

China - Xiamen

Tel: 86-592-2388138 Fax: 86-592-2388130

China - Zhuhai

Tel: 86-756-3210040 Fax: 86-756-3210049

ASIA/PACIFIC

India - Bangalore

Tel: 91-80-3090-4444 Fax: 91-80-3090-4123

India - New Delhi

Tel: 91-11-4160-8631 Fax: 91-11-4160-8632

India - Pune

Tel: 91-20-2566-1512 Fax: 91-20-2566-1513

Japan - Yokohama

Tel: 81-45-471- 6166 Fax: 81-45-471-6122

Korea - Daegu

Tel: 82-53-744-4301 Fax: 82-53-744-4302

Korea - Seoul

Tel: 82-2-554-7200 Fax: 82-2-558-5932 or 82-2-558-5934

Malaysia - Kuala Lumpur

Tel: 60-3-6201-9857 Fax: 60-3-6201-9859

Malaysia - Penang

Tel: 60-4-227-8870 Fax: 60-4-227-4068

Philippines - Manila

Tel: 63-2-634-9065 Fax: 63-2-634-9069

Singapore

Tel: 65-6334-8870 Fax: 65-6334-8850

Taiwan - Hsin Chu

Tel: 886-3-5778-366 Fax: 886-3-5770-955

Taiwan - Kaohsiung

Tel: 886-7-536-4818 Fax: 886-7-330-9305

Taiwan - Taipei

Tel: 886-2-2500-6610 Fax: 886-2-2508-0102

Thailand - Bangkok

Tel: 66-2-694-1351 Fax: 66-2-694-1350

EUROPE

Austria - Wels

Tel: 43-7242-2244-39 Fax: 43-7242-2244-393 Denmark - Copenhagen

Tel: 45-4450-2828

France - Paris

Tel: 33-1-69-53-63-20 Fax: 33-1-69-30-90-79

Germany - Munich

Tel: 49-89-627-144-0 Fax: 49-89-627-144-44

Italy - Milan

Tel: 39-0331-742611 Fax: 39-0331-466781

Netherlands - Drunen

Tel: 31-416-690399 Fax: 31-416-690340

Spain - Madrid

Tel: 34-91-708-08-90 Fax: 34-91-708-08-91

UK - Wokingham Tel: 44-118-921-5869

Tel: 44-118-921-5869 Fax: 44-118-921-5820

08/02/11