


# CGH27030

30 W, 28 V, GaN HEMT for Linear  
Communications ranging from VHF to 3 GHz

## Description

Wolfspeed's CGH27030 is a gallium nitride (GaN) high electron mobility transistor (HEMT) designed specifically for high efficiency, high gain and wide bandwidth capabilities, which makes the CGH27030 ideal for VHF, Comms, 3G, 4G, LTE, 2.3-2.9 GHz WiMAX and BWA amplifier applications. The unmatched transistor is available in both screwdown, flange and solder-down, pill packages.

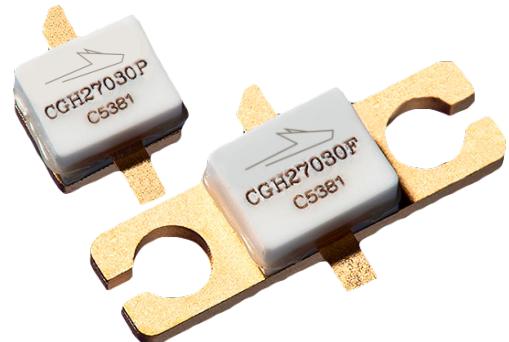

Package Types: 440196 and 440166  
PN's: CGH27030P and CGH27030F

## Typical Performance Over 2.3-2.7GHz ( $T_c = 25^\circ\text{C}$ ) of Demonstration Amplifier

Parameter	2.3 GHz	2.4 GHz	2.5 GHz	2.6 GHz	2.7 GHz	Unit
Small Signal Gain	15.6	15.5	15.3	15.1	15.2	dB
EVM at $P_{\text{AVE}} = 36 \text{ dBm}$	1.73	1.85	1.85	1.77	1.43	%
Drain Efficiency at 36 dBm	28.1	28.7	28.9	27.9	27.5	%
Input Return Loss	6.6	6.2	6.0	6.1	7.0	dB

### Notes:

<sup>1</sup> Measured in the CGH27030F-AMP amplifier circuit, under 802.16 OFDM, 3.5 MHz Channel BW, 1/4 Cyclic Prefix, 64 QAM Modulated Burst, 5ms Burst, Symbol Length of 59, Coding Type RS-CC, Coding Rate Type 2/3, PAR = 9.8 dB @ 0.01% Probability on CCDF.

## Features

- VHF - 3.0 GHz Operation
- 30 W Peak Power Capability
- 15 dB Small Signal Gain
- 4.0 W  $P_{\text{AVE}}$  at < 2.0 % EVM
- 28% Drain Efficiency at 4 W Average Power
- WiMAX Fixed Access 802.16-2004 OFDM
- WiMAX Mobile Access 802.16e OFDMA



Large Signal Models Available for ADS and MWO



## Absolute Maximum Ratings (not simultaneous) at 25°C Case Temperature

Parameter	Symbol	Rating	Units	Conditions
Drain-Source Voltage	V <sub>DSS</sub>	120	V	25°C
Gate-to-Source Voltage	V <sub>GS</sub>	-10, +2		
Power Dissipation	P <sub>DISS</sub>	14	W	
Storage Temperature	T <sub>STG</sub>	-65, +150		
Operating Junction Temperature	T <sub>J</sub>	225	°C	
Maximum Forward Gate Current	I <sub>GMAX</sub>	4.0		
Maximum Drain Current <sup>1</sup>	I <sub>DMAX</sub>	3.0	A	25°C
Soldering Temperature <sup>2</sup>	T <sub>S</sub>	245	°C	
Screw Torque	τ	40	in-oz	
Thermal Resistance, Junction to Case <sup>3</sup>	R <sub>θJC</sub>	4.8	°C/W	85°C
Case Operating Temperature <sup>3</sup>	T <sub>C</sub>	-40, +150	°C	

Notes:

<sup>1</sup> Current limit for long term, reliable operation

<sup>2</sup> Refer to the Application Note on soldering at [wolfspeed.com/rf/document-library](http://wolfspeed.com/rf/document-library)

<sup>3</sup> Measured for the CGH27030F at P<sub>DISS</sub> = 14 W

## Electrical Characteristics (T<sub>c</sub> = 25°C)

Characteristics	Symbol	Min.	Typ.	Max.	Units	Conditions
<b>DC Characteristics<sup>1</sup></b>						
Gate Threshold Voltage	V <sub>GS(th)</sub>	-3.8	-3.0	-2.3	V <sub>DC</sub>	V <sub>DS</sub> = 10 V, I <sub>D</sub> = 7.2 mA
Gate Quiescent Voltage	V <sub>GS(Q)</sub>	—	-2.7	—		V <sub>DS</sub> = 28 V, I <sub>D</sub> = 150 A
Saturated Drain Current	I <sub>DS</sub>	5.8	7.0	—	A	V <sub>DS</sub> = 6.0 V, V <sub>GS</sub> = 2 V
Drain-Source Breakdown Voltage	V <sub>BR</sub>	84	—	—	V <sub>DC</sub>	V <sub>GS</sub> = -8 V, I <sub>D</sub> = 7.2 mA
<b>RF Characteristics<sup>2, 3</sup> (T<sub>c</sub> = 25°C, F<sub>0</sub> = 2.5 GHz unless otherwise noted)</b>						
Small Signal Gain	G <sub>SS</sub>	12.5	14.5	—	dB	V <sub>DD</sub> = 28 V, I <sub>DQ</sub> = 150 mA
Drain Efficiency <sup>4</sup>	η	23.0	28.0	—	%	V <sub>DD</sub> = 28 V, I <sub>DQ</sub> = 150 mA, P <sub>AVE</sub> = 4 W
Error Vector Magnitude	EVM	—	2.0	—		
Output Mismatch Stress	VSWR	—	—	10 : 1	Ψ	No damage at all phase angles, V <sub>DD</sub> = 28 V, I <sub>DQ</sub> = 150 mA, P <sub>AVE</sub> = 4.0 W OFDM P <sub>AVE</sub>
<b>Dynamic Characteristics</b>						
Input Capacitance	C <sub>GS</sub>	—	9.0	—	pF	V <sub>DS</sub> = 28 V, V <sub>GS</sub> = -8 V, f = 1 MHz
Output Capacitance	C <sub>DS</sub>	—	2.6	—		
Feedback Capacitance	C <sub>GD</sub>	—	0.4	—		

Notes:

<sup>1</sup> Measured on wafer prior to packaging


<sup>2</sup> Measured in the CGH27030F-AMP test fixture

<sup>3</sup> Under 802.16 OFDM, 3.5 MHz Channel BW, 1/4 Cyclic Prefix, 64 QAM Modulated Burst, 5ms Burst, Symbol Length of 59, Coding Type RS-CC, Coding Rate Type 2/3, PAR = 9.8 dB @ 0.01% Probability on CCDF


<sup>4</sup> Drain Efficiency = P<sub>OUT</sub>/P<sub>Dc</sub>

<sup>5</sup> Capacitance values include package parasitics

## Typical WiMAX Performance

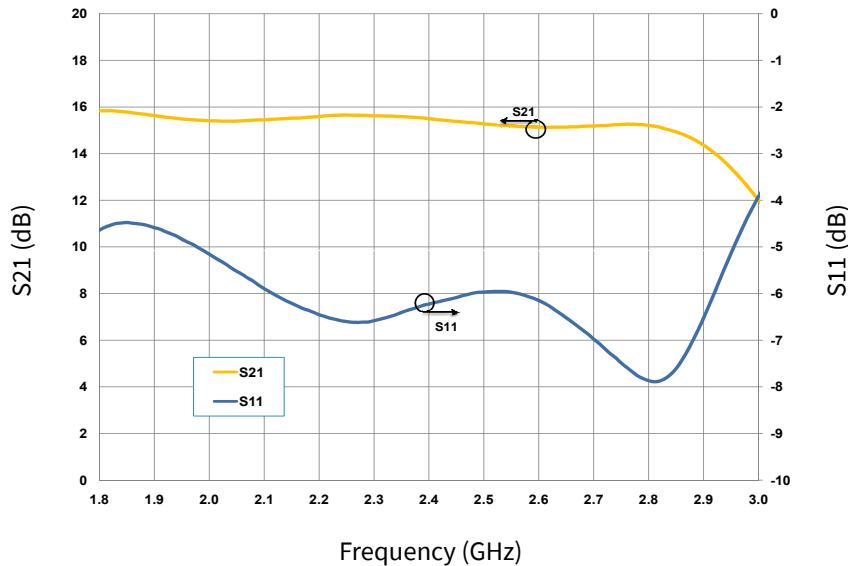

**Figure 1.** Small Signal S-Parameters vs Frequency measured in CGH27030F-AMP  
 $V_{DD} = 28$  V,  $I_{DQ} = 150$  mA

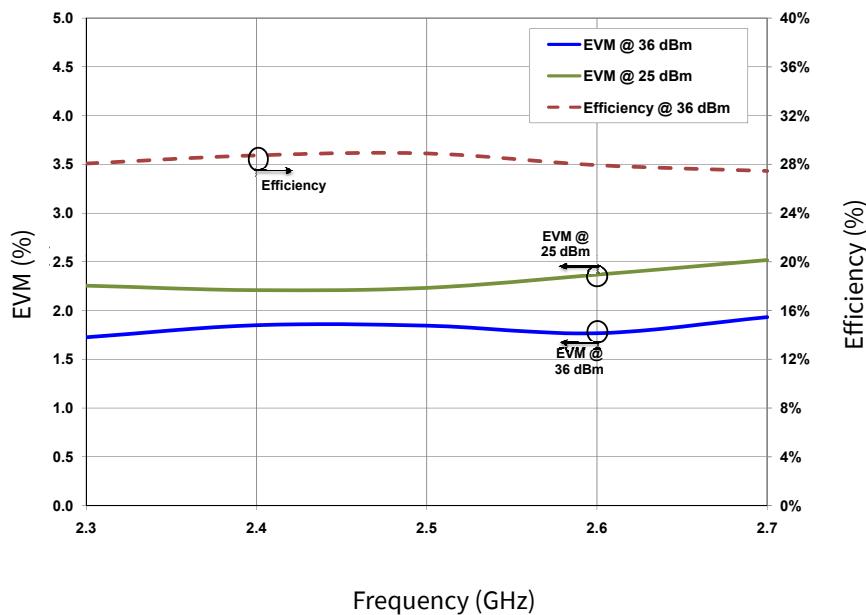


**Figure 2.** Typical EVM and Efficiency versus Frequency measured in CGH27030F-AMP  
 $V_{DS} = 28$  V,  $I_{DQ} = 150$  mA, 802.16-2004 OFDM, PAR = 9.8 dB,  $P_{AVE} = 5$  W


Note:

<sup>1</sup> Under 802.16 OFDM, 3.5 MHz Channel BW, 1/4 Cyclic Prefix, 64 QAM Modulated Burst, Symbol Length of 59, Coding Type RS-CC, Coding Rate Type 2/3, PAR = 9.8 dB @ 0.01% Probability on CCDF.

## Typical WiMAX Performance

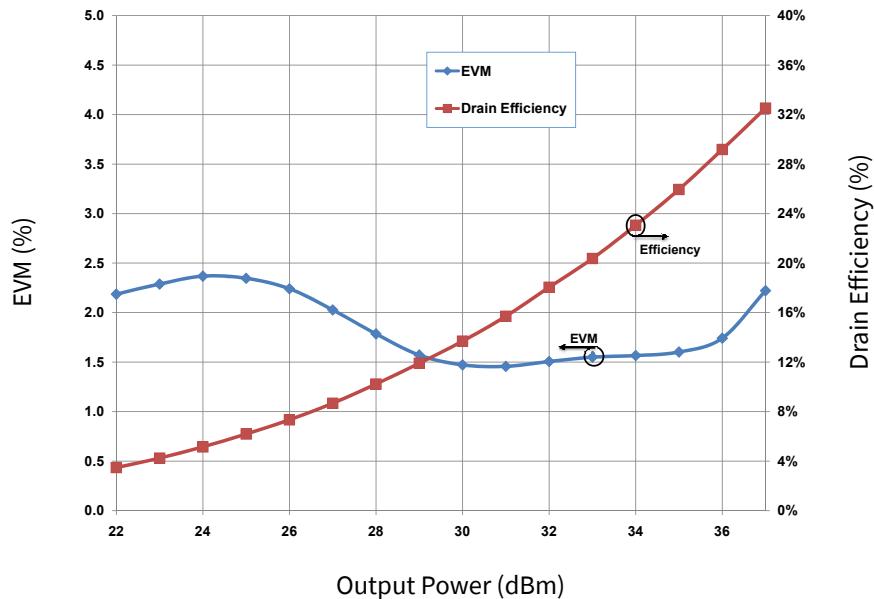


**Figure 3.** Drain Efficiency and EVM vs Output Power measured in CGH27030F-AMP  
 $V_{DD} = 28$  V,  $I_{DQ} = 150$  mA, 802.16-2004 OFDM, PAR = 9.8 dB

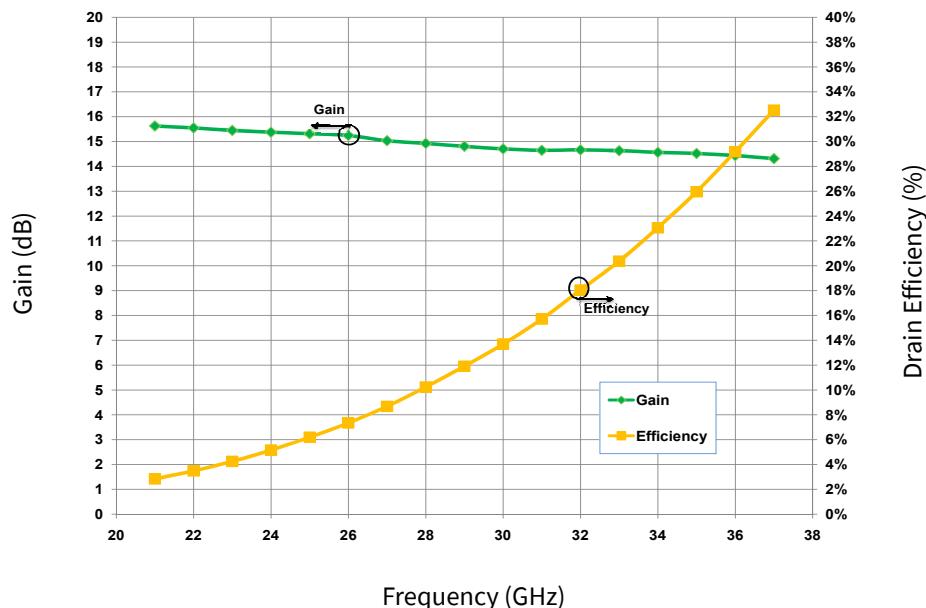


**Figure 4.** Typical Gain and Efficiency vs Output Power measured in CGH27030F-AMP  
 $V_{DD} = 28$  V,  $I_{DQ} = 150$  mA, 802.16-2004 OFDM, PAR = 9.8 dB

## Typical Performance Data

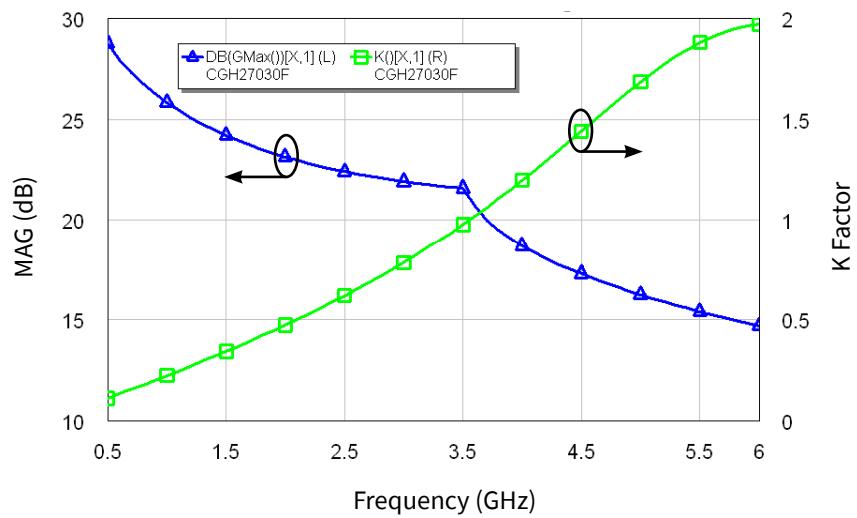

**Figure 5.** Simulated Maximum Available Gain and K Factor of the CGH27030F  
 $V_{DD} = 28$  V,  $I_{DQ} = 150$  mA

## Typical Noise Performance

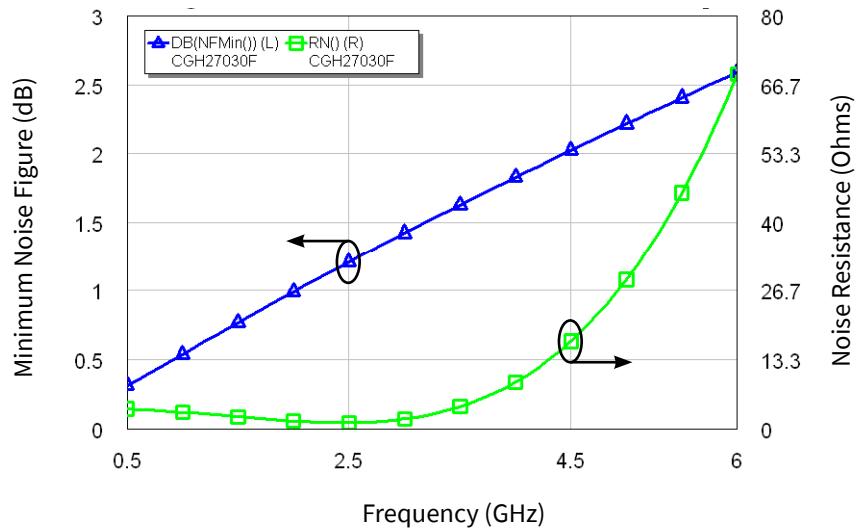


**Figure 6.** Simulated Minimum Noise Figure and Noise Resistance vs Frequency of the CGH27030  
 $V_{DD} = 28$  V,  $I_{DQ} = 150$  mA

## Electrostatic Discharge (ESD) Classifications

Parameter	Symbol	Class	Classification Level	Test Methodology
Human Body Model	HBM	TBD	ANSI/ESDA/JEDEC JS-001 Table 3	JEDEC JESD22 A114-D
Charge Device Model	CDM	TBD	ANSI/ESDA/JEDEC JS-002 Table 3	JEDEC JESD22 C101-C

## Source and Load Impedances

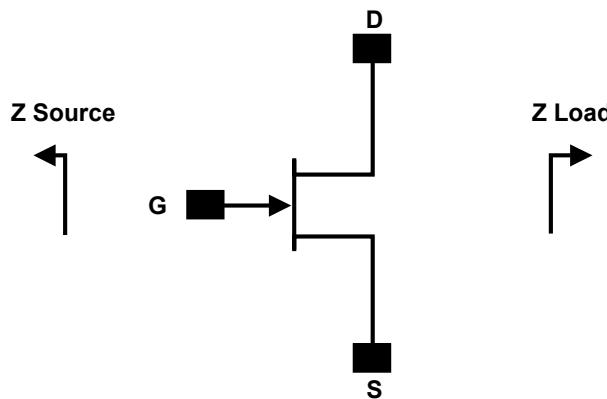

Frequency (MHz)	Z Source	Z Load
500	$7.75 + j15.5$	$20 + j5.2$
1000	$3.11 + j5.72$	$17 + j6.66$
1500	$2.86 + j1.63$	$16.8 + j3.2$
2500	$1.2 - j3.26$	$9.41 + j3.2$
3500	$1.31 - j7.3$	$5.85 - j0.51$


### Notes:

<sup>1</sup>  $V_{DD} = 28$  V,  $I_{DQ} = 250$  mA. In the 440166 package

<sup>2</sup> Optimized for power gain,  $P_{SAT}$  and  $P_{AE}$

<sup>3</sup> When using this device at low frequency, series resistors should be used to maintain amplifier stability

## CGH27030 Average Power Dissipation De-rating Curve

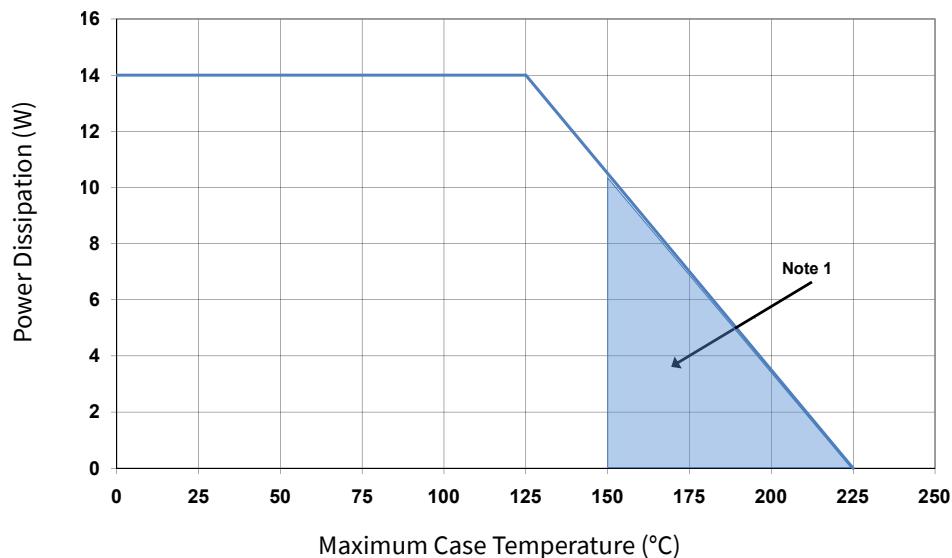


### Note:

<sup>1</sup> Area exceeds Maximum Case Operating Temperature (See Page 2)


## CGH27030F-AMP Demonstration Amplifier Circuit Bill of Materials

Designator	Description	Qty
R1	RES, 1/16W, 0603, 1%,100 OHMS	1
R2	RES, 1/16W,0603, 1%,47 OHMS	1
C5	CAP, 470pF, 5%,100V, 0603	1
C15	CAP, 33μF, 20%, G CASE	1
C14	CAP, 1.0μF, 100V, 10%, X7R, 1210	1
C7	CAP 10μF, 16V TANTALUM	1
C12	CAP, 100.0pF, +/-5%, 0603	1
C1	CAP, 1.6pF, +/-0.1pF, 0603	1
C2	CAP, 1.8pF, +/-0.1pF, 0603	1
C3, C10	CAP, 10.0pF,+/-5%, 0603	2
C4, C11	CAP, 39pF, +/-5%, 0603	2
C8, C9	CAP, 3.0pF, +/-0.1pF, 0603	2
C6, C13	CAP, 33000pF, 0805,100V, X7R	2
J3, J4	CONN SMA STR PANEL JACK RECP	1
J2	HEADER RT>PLZ.1CEN LK 2 POS	1
J1	J1 HEADER RT>PLZ .1CEN LK 5POS	1
—	PCB, RO4350B, Er = 3.48, h = 20 mil	1
—	CGH27030F	1


## CGH27030F-AMP Demonstration Amplifier Circuit

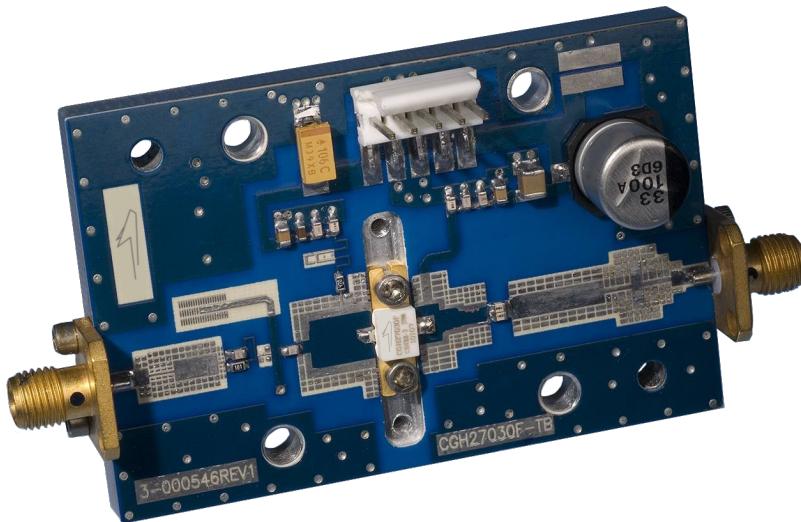

## CGH27030F-AMP Demonstration Amplifier Circuit Schematic

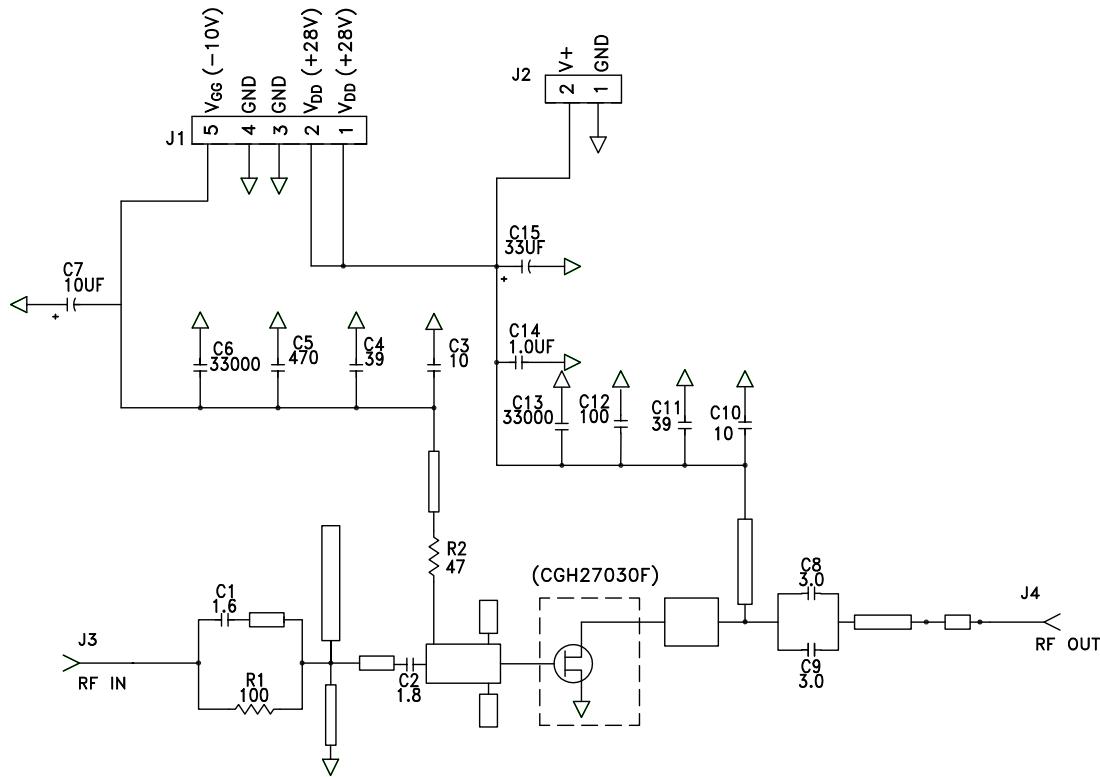

## CGH27030F-AMP Demonstration Amplifier Circuit Outline

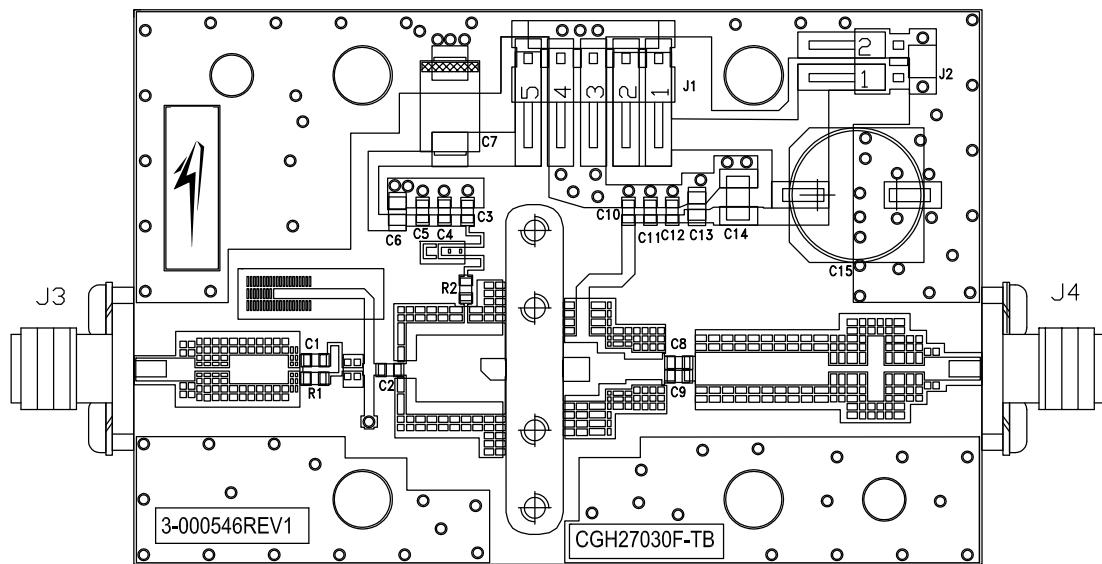


**Typical Package S-Parameters for CGH27030**  
**(Small Signal, V<sub>DS</sub> = 28 V, I<sub>DQ</sub> = 150 A, angle in degrees)**

Frequency	Mag S11	Ang S11	Mag S21	Ang S21	Mag S12	Ang S12	Mag S22	Ang S22
500 MHz	0.910	-127.91	18.04	106.46	0.024	20.12	0.314	-103.83
600 MHz	0.904	-137.21	15.52	100.35	0.025	14.75	0.306	-111.67
700 MHz	0.900	-144.50	13.58	95.23	0.025	10.38	0.302	-117.66
800 MHz	0.897	-150.40	12.04	90.78	0.025	6.69	0.302	-122.33
900 MHz	0.895	-155.33	10.80	86.81	0.026	3.48	0.303	-126.06
1.0 GHz	0.894	-159.54	9.78	83.20	0.026	0.63	0.306	-129.12
1.1 GHz	0.893	-163.21	8.93	79.85	0.026	-1.95	0.310	-131.69
1.2 GHz	0.892	-166.46	8.22	76.69	0.025	-4.31	0.315	-133.89
1.3 GHz	0.891	-169.40	7.60	73.70	0.025	-6.51	0.321	-135.84
1.4 GHz	0.891	-172.09	7.07	70.84	0.025	-8.56	0.327	-137.59
1.5 GHz	0.891	-174.57	6.61	68.08	0.025	-10.50	0.334	-139.20
1.6 GHz	0.891	-176.88	6.20	65.41	0.025	-12.34	0.341	-140.70
1.7 GHz	0.891	-179.07	5.84	62.81	0.025	-14.09	0.348	-142.13
1.8 GHz	0.891	178.86	5.52	60.28	0.025	-15.76	0.355	-143.51
1.9 GHz	0.891	176.88	5.23	57.79	0.024	-17.36	0.362	-144.85
2.0 GHz	0.891	174.98	4.96	55.35	0.024	-18.90	0.370	-146.16
2.1 GHz	0.891	173.13	4.73	52.95	0.024	-20.38	0.378	-147.46
2.2 GHz	0.892	171.34	4.51	50.59	0.024	-21.80	0.385	-148.75
2.3 GHz	0.892	169.60	4.32	48.25	0.023	-23.16	0.393	-150.03
2.4 GHz	0.892	167.89	4.14	45.95	0.023	-24.48	0.400	-151.32
2.5 GHz	0.892	166.20	3.97	43.66	0.023	-25.74	0.408	-152.61
2.6 GHz	0.893	164.55	3.82	41.40	0.023	-26.95	0.415	-153.91
2.7 GHz	0.893	162.91	3.68	39.16	0.022	-28.11	0.422	-155.21
2.8 GHz	0.893	161.28	3.54	36.93	0.022	-29.22	0.429	-156.52
2.9 GHz	0.893	159.67	3.42	34.72	0.022	-30.28	0.436	-157.84
3.0 GHz	0.894	158.06	3.31	32.52	0.021	-31.28	0.443	-159.17
3.2 GHz	0.894	154.86	3.10	28.16	0.021	-33.13	0.456	-161.87
3.4 GHz	0.894	151.65	2.92	23.83	0.020	-34.76	0.469	-164.62
3.6 GHz	0.895	148.41	2.77	19.52	0.020	-36.15	0.480	-167.42
3.8 GHz	0.895	145.14	2.63	15.23	0.019	-37.28	0.491	-170.27
4.0 GHz	0.895	141.81	2.50	10.94	0.018	-38.13	0.501	-173.18
4.2 GHz	0.895	138.42	2.39	6.64	0.018	-38.69	0.510	-176.16
4.4 GHz	0.896	134.95	2.29	2.32	0.017	-38.93	0.519	-179.20
4.6 GHz	0.896	131.39	2.20	-2.02	0.017	-38.84	0.526	177.68
4.8 GHz	0.896	127.73	2.12	-6.40	0.016	-38.43	0.533	174.48
5.0 GHz	0.895	123.96	2.05	-10.82	0.016	-37.69	0.539	171.19
5.2 GHz	0.895	120.07	1.99	-15.29	0.016	-36.68	0.545	167.80
5.4 GHz	0.895	116.05	1.93	-19.83	0.016	-35.43	0.549	164.31
5.6 GHz	0.895	111.90	1.87	-24.44	0.016	-34.05	0.553	160.70
5.8 GHz	0.895	107.59	1.82	-29.13	0.016	-32.64	0.556	156.95
6.0 GHz	0.895	103.14	1.78	-33.91	0.016	-31.32	0.559	153.06

To download the s-parameters in s2p format, go to the [CGH27030 Product page](#) and click on the documentation tab.

## Product Dimensions CGH27030F (Package Type – 440166)

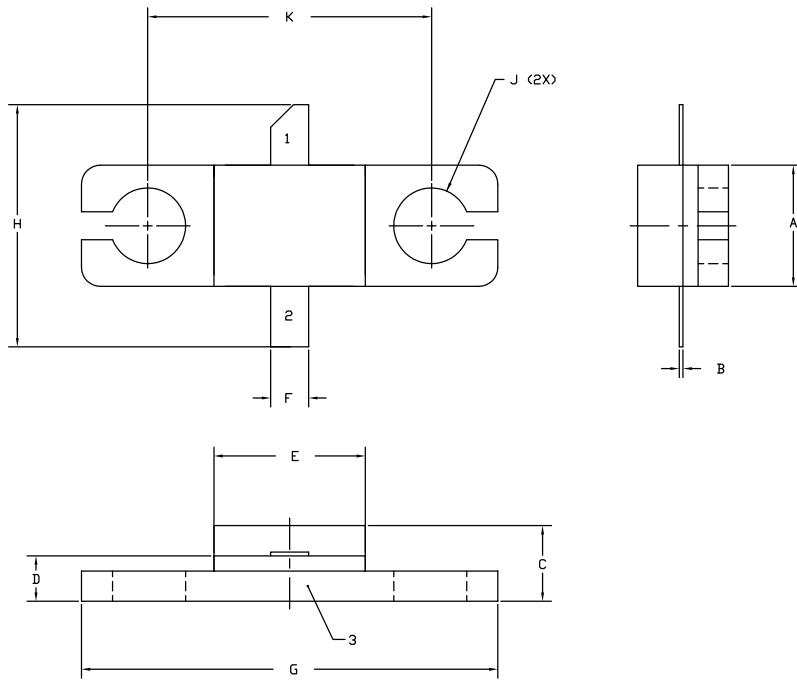


### NOTES:

1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
2. CONTROLLING DIMENSION INCH.
3. ADHESIVE FROM LID MAY EXTEND A MAXIMUM OF 0.020" BEYOND EDGE OF LID.
4. LID MAY BE MISALIGNED TO THE BODY OF THE PACKAGE BY A MAXIMUM OF 0.008" IN ANY DIRECTION.
5. ALL PLATED SURFACES ARE NI/AU

DIM	INCHES		MILLIMETERS	
	MIN	MAX	MIN	MAX
A	0.155	0.165	3.94	4.19
B	0.004	0.006	0.10	0.15
C	0.115	0.135	2.92	3.43
D	0.057	0.067	1.45	1.70
E	0.195	0.205	4.95	5.21
F	0.045	0.055	1.14	1.40
G	0.545	0.555	13.84	14.09
H	0.280	0.360	7.11	9.14
J	$\phi .100$		2.54	
K	0.375		9.53	

PIN 1. GATE  
PIN 2. DRAIN  
PIN 3. SOURCE

## Product Dimensions CGH27030P (Package Type – 440196)

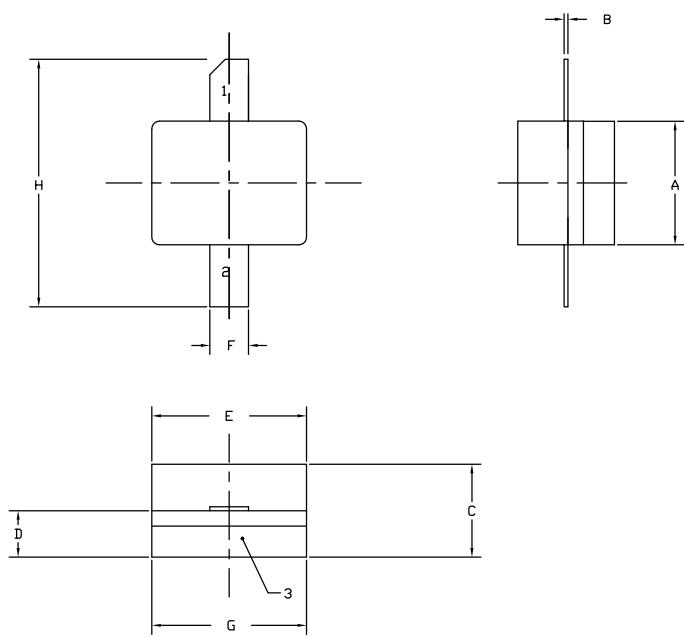

### NOTES:

1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
2. CONTROLLING DIMENSION INCH.
3. ADHESIVE FROM LID MAY EXTEND A MAXIMUM OF 0.020" BEYOND EDGE OF LID.
4. LID MAY BE MISALIGNED TO THE BODY OF THE PACKAGE BY A MAXIMUM OF 0.008" IN ANY DIRECTION.
5. ALL PLATED SURFACES ARE NI/AU

DIM	INCHES		MILLIMETERS	
	MIN	MAX	MIN	MAX
A	0.155	0.165	3.94	4.19
B	0.003	0.006	0.10	0.15
C	0.115	0.135	2.92	3.17
D	0.057	0.067	1.45	1.70
E	0.195	0.205	4.95	5.21
F	0.045	0.055	1.14	1.40
G	0.195	0.205	4.95	5.21
H	0.280	0.360	7.11	9.14

PIN 1. GATE  
PIN 2. DRAIN  
PIN 3. SOURCE



## Product Ordering Information

Order Number	Description	Unit of Measure	Image
CGH27030F	GaN HEMT	Each	A GaN HEMT device in a gold-colored metal can package. The package is rectangular with a flat top and two large gold-colored heat sinks on the sides. The text "CGH27030F" and "C5381" is printed on the top surface.
CGH27030P	GaN HEMT	Each	A GaN HEMT device in a white ceramic package with a gold-colored lead. The package is rectangular with a flat top and a small gold-colored heat sink on one side. The text "CGH27030P" and "C5381" is printed on the top surface.
CGH27030F-AMP	Test board with GaN HEMT installed	Each	A blue printed circuit board (PCB) with various electronic components, including resistors, capacitors, and a microcontroller. A gold-colored SMA connector is attached to the board. The text "CGH27030F-AMP" is printed on the board.

**For more information, please contact:**

4600 Silicon Drive  
Durham, NC 27703 USA  
Tel: +1.919.313.5300  
[www.wolfspeed.com/RF](http://www.wolfspeed.com/RF)

Sales Contact  
[RFSales@wolfspeed.com](mailto:RFSales@wolfspeed.com)

RF Product Marketing Contact  
[RFMarketing@wolfspeed.com](mailto:RFMarketing@wolfspeed.com)

---

**Notes & Disclaimer**

Specifications are subject to change without notice. "Typical" parameters are the average values expected by Wolfspeed in large quantities and are provided for information purposes only. Wolfspeed products are not warranted or authorized for use as critical components in medical, life-saving, or life-sustaining applications, or other applications where a failure would reasonably be expected to cause severe personal injury or death. No responsibility is assumed by Wolfspeed for any infringement of patents or other rights of third parties which may result from use of the information contained herein. No license is granted by implication or otherwise under any patent or patent rights of Wolfspeed.

© 2007-2022 Wolfspeed, Inc. All rights reserved. Wolfspeed® and the Wolfstreak logo are registered trademarks and the Wolfspeed logo is a trademark of Wolfspeed, Inc.  
PATENT: <https://www.wolfspeed.com/legal/patents>

*The information in this document is subject to change without notice.*