



## Electromechanical Relay Switches Technical Data Sheet

PE71S6404

## **Features**

- Single Pole Double Throw
- DC to 18 GHz Frequency Range
- Isolation greater than 85 dB typical
- 2M Cycle Min Operating Life
- +28 Volt DC
- 90 Watt average Power
- · Failsafe Actuator
- Internally Terminated

- -25 to +70°C Operating Temperature
- Insertion Loss as low as 0.4 dB Max
- VSWR as low as 1.4:1 max
- SMA Female RF connectors
- Solder Pins for DC Control
- Hot Switching Capability Consult Factory
- S-Parameter Data available upon request

## **Applications**

- High Performance Relay Switch
- Military Communications
- Communications Systems
- Test & Measurement

## **Description**

The PE71S6404 is a Single Pole Double Throw (SPDT) electromechanical relay switch that operates across a wide frequency range of DC to 18 GHz and can handle up to 90 Watts of CW input power in a break before make condition. The design features a Failsafe actuator and is rated for 2M life cycles for high reliability operation. Impressive performance includes insertion loss less than 0.15 dB typical and isolation greater than 85 dB typical. The Failsafe actuator and 5 Watt Internal Terminations with a +28 Vdc bias voltage, and operates over a temperature range of -25°C to +70°C. The rugged and compact package assembly supports SMA Female connectors and Solder Pins for DC Control. And for highly reliable operation, the model is guranteed to meet MIL-STD-202 environmental test conditions for shock and random vibration.

#### **Electrical Specifications**

Switch Type Actuator Type Switching Sequence SPDT, Terminated Failsafe Break before Make

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		18	GHz
Impedance		50		Ohms
Termination Impedance		50		Ohms
Operating Voltage	26	28	30	Volts
Actuating Set Current @ 28 Volts		90		mA
VSWR		1.2:1	1.4:1	
Insertion Loss		0.15	0.4	dB
Isolation	65	85		dB
Input Power (CW)			60	Watts
Termination Input Power (CW)			5	Watts
Switching Time			20	ms Max

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: SPDT Electromechanical Relay Failsafe Switch, Terminated, DC to 18 GHz, up to 90W, 28V, SMA PE71S6404

Pasternack Enterprises, Inc. • P.O. Box 16759, Irvine, CA 92623 **Phone:** (866) 727-8376 or (949) 261-1920 • **Fax:** (949) 261-7451

Sales@Pasternack.com • Techsupport@Pasternack.com





## Electromechanical Relay Switches Technical Data

PE71S6404

## Performance by Frequency

Description	F1	F2	F3	F4	F5	Units
Frequency Range	DC to 6	6 to 12	12 to 18			GHz
VSWR, Max	1.2:1	1.3:1	1.4:1			
Insertion Loss, Max	0.15	0.25	0.4			dB
Isolation, Min	85	70	65			dB
Input Power, Typ (CW)	90	75	60			Watts

## **Mechanical Specifications**

Size

Body Material and Plating

Package Type

Operating Life

**Connectors** 

RF Connector Type

RF Connector Contact Material and Plating

RF Connector Body Material and Plating

**Control Connector** 

**Environmental Specifications** 

**Temperature** 

**Operating Range** 

Storage Range

Shock

Vibration

Aluminum Connectorized

2,000,000 Cycles

**SMA Female** 

Beryllium Copper, Gold

Aluminum, Nickel

Solder Pin

-25 to +70 deg C -55 to +100 deg C

· ·

MIL-STD-202 Method 213, Cond. D 500G Non Operating

MIL-STD-202 Method 214, Cond. D 10G RMS Non

Operating

Compliance Certifications (see product page for current document)

#### **Plotted and Other Data**

Notes:

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: SPDT Electromechanical Relay Failsafe Switch, Terminated, DC to 18 GHz, up to 90W, 28V, SMA PE71S6404

Pasternack Enterprises, Inc. • P.O. Box 16759, Irvine, CA 92623 **Phone:** (866) 727-8376 or (949) 261-1920 • **Fax:** (949) 261-7451

Sales@Pasternack.com • Techsupport@Pasternack.com






# Electromechanical Relay Switches Technical Data

## PE71S6404

#### **Typical Performance Data**



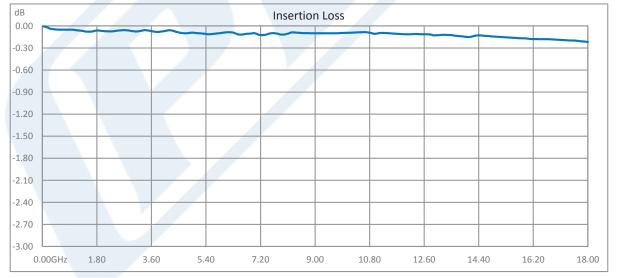

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: SPDT Electromechanical Relay Failsafe Switch, Terminated, DC to 18 GHz, up to 90W, 28V, SMA PE71S6404

Pasternack Enterprises, Inc. • P.O. Box 16759, Irvine, CA 92623 **Phone:** (866) 727-8376 or (949) 261-1920 • **Fax:** (949) 261-7451

Sales@Pasternack.com • Techsupport@Pasternack.com




# A CONTROL OF THE PARTY OF THE P

# SPDT Electromechanical Relay Failsafe Switch, Terminated, DC to 18 GHz, up to 90W, 28V, SMA

## Electromechanical Relay Switches Technical Data

PE71S6404

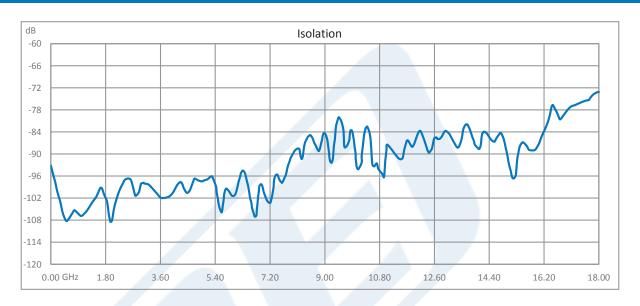

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: SPDT Electromechanical Relay Failsafe Switch, Terminated, DC to 18 GHz, up to 90W, 28V, SMA PE71S6404


Pasternack Enterprises, Inc. • P.O. Box 16759, Irvine, CA 92623 **Phone:** (866) 727-8376 or (949) 261-1920 • **Fax:** (949) 261-7451





Electromechanical Relay Switches Technical Data

PE71S6404

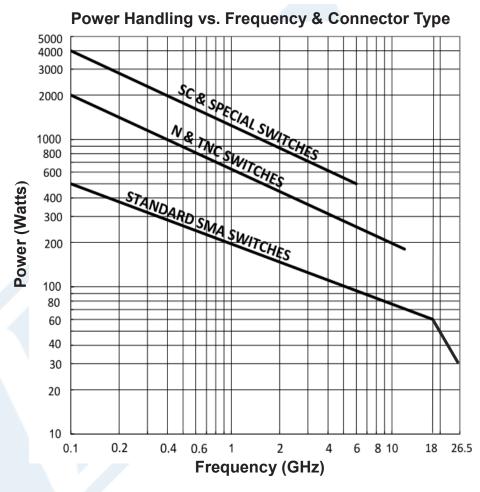

#### **Environmental and Test Conditions:**

- Ambient temperature of 25°C or less
- Altitude: Sea Level
- Load VSWR: 1.20:1 max.
- Cold Switching

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: SPDT Electromechanical Relay Failsafe Switch, Terminated, DC to 18 GHz, up to 90W, 28V, SMA PE71S6404

Pasternack Enterprises, Inc. • P.O. Box 16759, Irvine, CA 92623 **Phone:** (866) 727-8376 or (949) 261-1920 • **Fax:** (949) 261-7451





## Electromechanical Relay Switches Technical Data

PE71S6404

SPDT Electromechanical Relay Failsafe Switch, Terminated, DC to 18 GHz, up to 90W, 28V, SMA from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.


Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: SPDT Electromechanical Relay Failsafe Switch, Terminated, DC to 18 GHz, up to 90W, 28V, SMA PE71S6404

URL: https://www.pasternack.com/spdt-electromechanical-relay-failsafe-switch-terminated-18-ghz-60w-28v-sma-pe71s6404-p.aspx

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.


# PE71S6404 CAD Drawing

SPDT Electromechanical Relay Failsafe Switch, Terminated, DC to 18 GHz, up to 90W, 28V, SMA

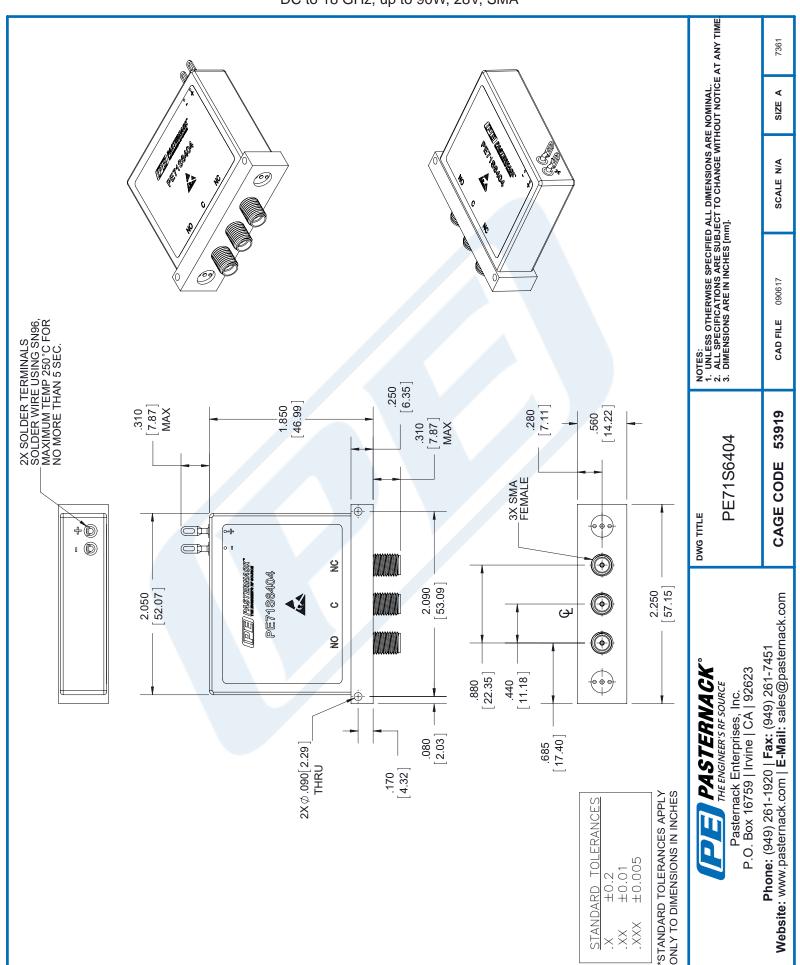

# PE71S6404 CAD Drawing

SPDT Electromechanical Relay Failsafe Switch, Terminated, DC to 18 GHz, up to 90W, 28V, SMA

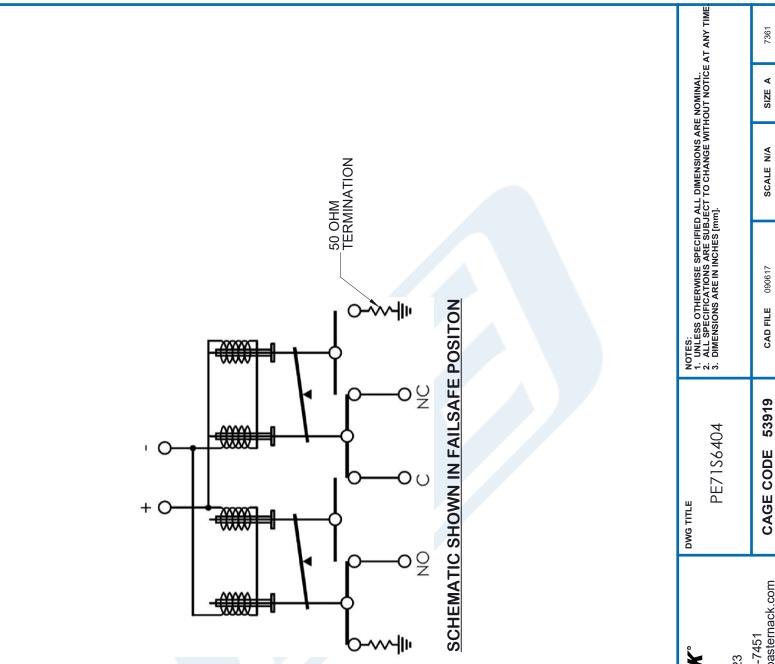

PASTERNACK
THE ENGINEER'S RF SOURCE

\*STANDARD TOLERANCES APPLY ONLY TO DIMENSIONS IN INCHES

±0.2 ±0.01 ±0.005

 $\times \times \times \times$ 

STANDARD TOLERANCES

Pasternack Enterprises, Inc.
P.O. Box 16759 | Irvine | CA | 92623
e: (949) 261-1920 | Fax: (949) 261-7

Phone: (949) 261-1920 | Fax: (949) 261-7451
Website: www.pasternack.com | E-Mail: sales@pasternack.com