

## Is Now Part of



## ON Semiconductor®

## To learn more about ON Semiconductor, please visit our website at www.onsemi.com

Please note: As part of the Fairchild Semiconductor integration, some of the Fairchild orderable part numbers will need to change in order to meet ON Semiconductor's system requirements. Since the ON Semiconductor product management systems do not have the ability to manage part nomenclature that utilizes an underscore (\_), the underscore (\_) in the Fairchild part numbers will be changed to a dash (-). This document may contain device numbers with an underscore (\_). Please check the ON Semiconductor website to verify the updated device numbers. The most current and up-to-date ordering information can be found at <a href="www.onsemi.com">www.onsemi.com</a>. Please email any questions regarding the system integration to Fairchild <a href="guestions@onsemi.com">guestions@onsemi.com</a>.

ON Semiconductor and the ON Semiconductor logo are trademarks of Semiconductor Components Industries, LLC dba ON Semiconductor or its subsidiaries in the United States and/or other countries. ON Semiconductor owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of ON Semiconductor's product/patent coverage may be accessed at www.onsemi.com/site/pdf/Patent-Marking.pdf. ON Semiconductor reserves the right to make changes without further notice to any products herein. ON Semiconductor makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does ON Semiconductor assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using ON Semiconductor products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by ON Semiconductor. "Typical" parameters which may be provided in ON Semiconductor data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. ON Semiconductor does not convey any license under its patent rights nor the rights of others. ON Semiconductor products are not designed, intended, or authorized for use as a critical component in life support systems or any EDA Class 3 medical devices or medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase or use ON Semiconductor products for any such unintended or unauthorized application, Buyer shall indemnify and hold ON Semiconductor and its officer



September 2009

# **KSC5305DF NPN Silicon Transistor**

## **Features**

· High Voltage High Speed Power Switch

# Equivalent Circuit



## **Application**

- Built-in Free-wheeling Diode makes efficient anti saturation operation
- Suitable for half bridge light ballast Applications
- No need to interest an h<sub>FE</sub> value because of low variable storage-time spread even though corner spirit product
- · Low base drive requirement

## **Absolute Maximum Ratings** $T_A=25^{\circ}C$ unless otherwise noted

Symbol	Parameter	Value	Units	
V <sub>CBO</sub>	Collector Base Voltage	800	V	
V <sub>CEO</sub>	Collector Emitter Voltage	400	V	
V <sub>EBO</sub>	Emitter Base Voltage	12	V	
I <sub>C</sub>	Collector Current (DC)	5	А	
I <sub>CP</sub>	*Collector Current (Pulse)	10	А	
I <sub>B</sub>	Base Current (DC)	2	А	
I <sub>BP</sub>	*Base Current (Pulse)	4	Α	
P <sub>C</sub>	Power Dissipation (T <sub>C</sub> =25°C)	40	W	
TJ	Junction Temperature	150	°C	
T <sub>STG</sub>	Storage Temperature range	-65 to +150	°C	

## **Thermal Characteristics**


Symbol	Parameter	Rating	Units
$R_{ heta JC}$	Thermal Resistance, Junction to Case	3.125	°C/W
$R_{\theta JA}$	Thermal Resistance, Junction to Ambient	69.5	°C/W

## **Electrical Characteristics** T<sub>A</sub>=25°C unless otherwise noted

Symbol	Parameter	Test Condition	Min.	Тур.	Max.	Units
BV <sub>CBO</sub>	Collector-Base Breakdown Voltage	I <sub>C</sub> =1mA, I <sub>E</sub> =0	800	-	-	V
BV <sub>CEO</sub>	Collector-Emitter Breakdown Voltage	I <sub>C</sub> =5mA, I <sub>B</sub> =0	400	-	-	V
BV <sub>EBO</sub>	Emitter Cut-off Current	I <sub>E</sub> =1mA, I <sub>C</sub> =0	12	-	-	V
I <sub>CBO</sub>	Collector Cut-off Current	V <sub>CB</sub> =500V, I <sub>E</sub> =0	-	-	10	μА
I <sub>EBO</sub>	Emitter Cut-off Current	V <sub>EB</sub> = 9V, I <sub>C</sub> = 0	-	-	10	μА
h <sub>FE1</sub>	DC Current Gain	V <sub>CE</sub> =1V, I <sub>C</sub> =0.8A V <sub>CE</sub> =1V,I <sub>C</sub> =2A	22 8	-		
V <sub>CE</sub> (sat)	Collector-Emitter Saturation Voltage	I <sub>C</sub> =0.8A, I <sub>B</sub> =0.08A I <sub>C</sub> =2A, I <sub>B</sub> =0.4A	-		0.4 0.5	V V
V <sub>BE</sub> (sat)	Base-Emitter Saturation Voltage	I <sub>C</sub> =0.8A, I <sub>B</sub> =0.08A I <sub>C</sub> =2A, I <sub>B</sub> =0.4A	- -	-	1.0 1.0	V V
C <sub>ob</sub>	Output Capacitance	$V_{CB} = 10V$ , $f=1MHz$	-	-	75	pF
t <sub>ON</sub>	Turn On Time	V <sub>CC</sub> =300V, I <sub>C</sub> =2A	-	-	150	ns
t <sub>STG</sub>	Storage Time	$I_{B1} = 0.4A, I_{B2} = -1A$	-	-	2	μS
t <sub>F</sub>	Fall Time	$R_L = 150\Omega$	-	-	0.2	μS
t <sub>STG</sub>	Storage Time	V <sub>CC</sub> =15V,V <sub>Z</sub> =300V	-	-	2.25	μS
t <sub>F</sub>	Fall Time	$I_C = 2A, I_{B1} = 0.4A$ $I_{B2} = -0.4A, L_C = 200 \mu H$	-	-	150	ns
V <sub>F</sub>	Diode Forward Voltage	$I_F = 1A$ $I_F = 2A$	-	-	1.5 1.6	V V
t <sub>rr</sub>	* Reverse recovery time (di/dt = 10A/μs)	$I_F = 0.4A$ $I_F = 1A$ $I_F = 2A$	- - -	800 1.4 1.9	- - -	ns μs μs

<sup>\*</sup> Pulse Test : Pulse Width=5mS, Duty cycles  $\leq$  10%

## **Typical Performance Characteristics**

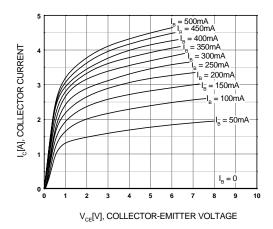

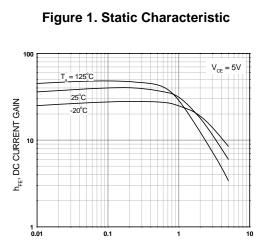


Figure 3. DC current Gain

I<sub>c</sub>[A], COLLECTOR CURRENT

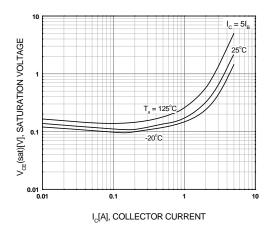


Figure 5. Collector-Emitter Saturation Voltage

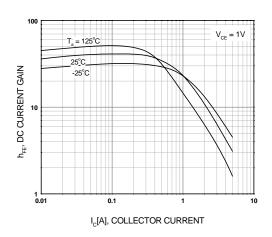


Figure 2. DC current Gain

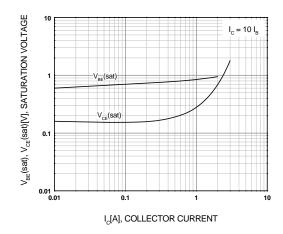


Figure 4. Collector-Emitter Saturation Voltage Base-Emitter Saturation Voltage

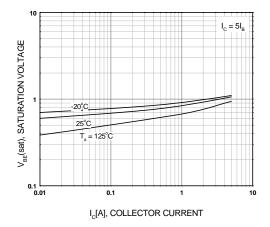
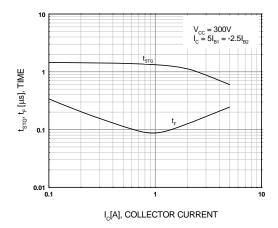


Figure 6. Base-Emitter Saturation Voltage

## **Typical Performance Characteristics**



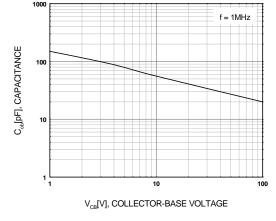


Figure 7. Switching Time

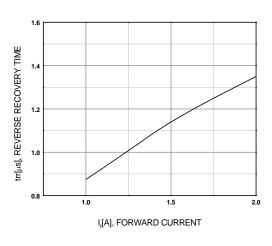


Figure 8. Collector Output Capacitance

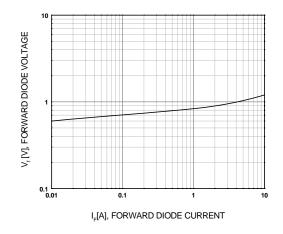


Figure 9. Reverse Recovery Time

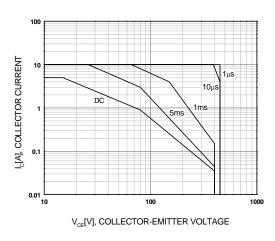


Figure 10. Forward Diode Voltage


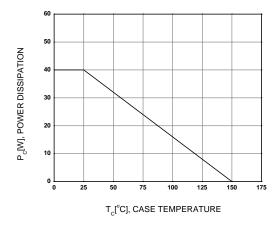


Figure 11. Safe Operating Area

Figure 12. Power Derating

## **Physical Dimension**

## TO-220F

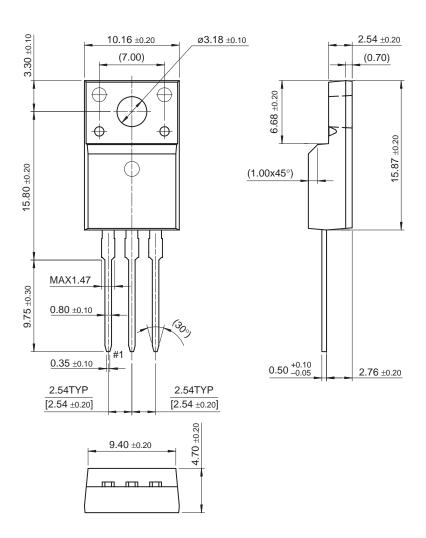

Dimensions in Millimeters





#### TRADEMARKS

The following includes registered and unregistered trademarks and service marks, owned by Fairchild Semiconductor and/or its global subsidiaries, and is not intended to be an exhaustive list of all such trademarks.

AccuPower™ **FPS™** F-PFS™ Auto-SPM™ FRFET® Build it Now™

Global Power Resource<sup>SM</sup> CorePLUS™

CorePOWER™ Green FPS™

CROSSVOLT™ Green FPS™ e-Series™ CTL™

 $\mathsf{G} max^{\mathsf{TM}}$ Current Transfer Logic™  $\mathsf{GTO}^{\mathsf{TM}}$ EcoSPARK<sup>®</sup> IntelliMAX™ EfficentMax™ ISOPLANAR™ EZSWITCH™\* MegaBuck™

 $\mathsf{MICROCOUPLER}^{\scriptscriptstyle\mathsf{TM}}$ MicroFET™ MicroPak™ MillerDrive™ Fairchild® MotionMax™ Fairchild Semiconductor® Motion-SPM™

FACT Quiet Series™ FACT® FAST® OPTOPLANAR® FastvCore™

FETBench™ PDP SPM™ FlashWriter®\* Power-SPM™ PowerTrench® PowerXS<sup>™</sup>

Programmable Active Droop™

QFĔT<sup>c</sup> QS™ Quiet Series™ RapidConfigure™

Saving our world, 1mW/W/kW at a time™

SmartMax™ SMART START™ SPM® STEALTH™ SuperFET™ SuperSOT™-3 SuperSOT™-6 SuperSOT™-8 SupreMOS™

SyncFET™ Sync-Lock™ SYSTEM®

GENERAL

The Power Franchise®

puwer TinyBoost™ TinyBuck™ TinyCalc™ TinyLogic<sup>®</sup> TINYOPTO™ TinyPower™ TinyPWM™ TinyWire™ TriFault Detect™ TRUECURRENT™\* μSerDes™

UHC Ultra FRFET™ UniFFT™  $VCX^{TM}$ VisualMax™ XSTM

OPTOLOGIC®

#### **DISCLAIMER**

FAIRCHILD SEMICONDUCTOR RESERVES THE RIGHT TO MAKE CHANGES WITHOUT FURTHER NOTICE TO ANY PRODUCTS HEREIN TO IMPROVE RELIABILITY, FUNCTION, OR DESIGN. FAIRCHILD DOES NOT ASSUME ANY LIABILITY ARISING OUT OF THE APPLICATION OR USE OF ANY PRODUCT OR CIRCUIT DESCRIBED HEREIN; NEITHER DOES IT CONVEY ANY LICENSE UNDER ITS PATENT RIGHTS, NOR THE RIGHTS OF OTHERS. THESE SPECIFICATIONS DO NOT EXPAND THE TERMS OF FAIRCHILD'S WORLDWIDE TERMS AND CONDITIONS, SPECIFICALLY THE WARRANTY THEREIN, WHICH COVERS THESE PRODUCTS.

#### LIFE SUPPORT POLICY

FAIRCHILD'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS WRITTEN APPROVAL OF FAIRCHILD SEMICONDUCTOR CORPORATION.

- 1. Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body or (b) support or sustain life, and (c) whose failure to perform when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in a significant injury of the user.
- 2. A critical component in any component of a life support, device, or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.

#### **ANTI-COUNTERFEITING POLICY**

Fairchild Semiconductor Corporation's Anti-Counterfeiting Policy. Fairchild's Anti-Counterfeiting Policy is also stated on our external website, www.fairchildsemi.com, under Sales Support.

Counterfeiting of semiconductor parts is a growing problem in the industry. All manufacturers of semiconductor products are experiencing counterfeiting of their parts. Customers who inadvertently purchase counterfeit parts experience many problems such as loss of brand reputation, substandard performance, failed applications, and increased cost of production and manufacturing delays. Fairchild is taking strong measures to protect ourselves and our customers from the proliferation of counterfeit parts. Fairchild strongly encourages customers to purchase Fairchild parts either directly from Fairchild or from Authorized Fairchild Distributors who are listed by country on our web page cited above. Products customers buy either from Fairchild directly or from Authorized Fairchild Distributors are genuine parts, have full traceability, meet Fairchild's quality standards for handling and storage and provide access to Fairchild's full range of up-to-date technical and product information. Fairchild and our Authorized Distributors will stand behind all warranties and will appropriately address any warranty issues that may arise. Fairchild will not provide any warranty coverage or other assistance for parts bought from Unauthorized Sources. Fairchild is committed to combat this global problem and encourage our customers to do their part in stopping this practice by buying direct or from authorized distributors.

#### PRODUCT STATUS DEFINITIONS

#### Definition of Terms

Definition of Terms				
Datasheet Identification	Product Status	Definition		
Advance Information	Formative / In Design	Datasheet contains the design specifications for product development. Specifications may change in any manner without notice.		
Preliminary	First Production	Datasheet contains preliminary data; supplementary data will be published at a later date. Fairchild Semiconductor reserves the right to make changes at any time without notice to improve design.		
No Identification Needed	Full Production	Datasheet contains final specifications. Fairchild Semiconductor reserves the right to make changes at any time without notice to improve the design.		
Obsolete	Not In Production	Datasheet contains specifications on a product that is discontinued by Fairchild Semiconductor. The datasheet is for reference information only.		

Rev. 141

<sup>\*</sup> Trademarks of System General Corporation, used under license by Fairchild Semiconductor.

ON Semiconductor and in are trademarks of Semiconductor Components Industries, LLC dba ON Semiconductor or its subsidiaries in the United States and/or other countries. ON Semiconductor owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of ON Semiconductor's product/patent coverage may be accessed at <a href="www.onsemi.com/site/pdf/Patent-Marking.pdf">www.onsemi.com/site/pdf/Patent-Marking.pdf</a>. ON Semiconductor reserves the right to make changes without further notice to any products herein. ON Semiconductor and see no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does ON Semiconductor assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using ON Semiconductor products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by ON Semiconductor. "Typical" parameters which may be provided in ON Semiconductor data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. ON Semiconductor does not convey any license under its patent rights nor the rights of others. ON Semiconductor products are not designed, intended, or authorized for use as a critical component in life support systems or any FDA Class 3 medical devices or medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase or use ON Semiconductor products for any such unintended or unauthorized application, Buyer shall indemnify and h

### **PUBLICATION ORDERING INFORMATION**

#### LITERATURE FULFILLMENT:

Literature Distribution Center for ON Semiconductor 19521 E. 32nd Pkwy, Aurora, Colorado 80011 USA Phone: 303-675-2175 or 800-344-3860 Toll Free USA/Canada Fax: 303-675-2176 or 800-344-3867 Toll Free USA/Canada Email: orderlit@onsemi.com N. American Technical Support: 800–282–9855 Toll Free USA/Canada
Europe, Middle East and Africa Technical Support: Phone: 421 33 790 2910
Japan Customer Focus Center
Phone: 81–3–5817–1050

ON Semiconductor Website: www.onsemi.com

Order Literature: http://www.onsemi.com/orderlit

For additional information, please contact your local Sales Representative