
1-conductor THT female connector angled; push-button; Push-in CAGE CLAMP®; 2.5 mm²; Pin spacing 5 mm; 10-pole; 1.4 mm Ø solder pin; 2,50 mm²; light gray



www.wago.com/2092-1380




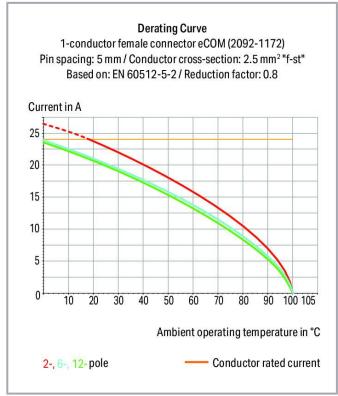

 $\label{thm:continuity} \textbf{Subject to changes. Please also observe the further product documentation!}$ 

www.wago.com/2092-1380



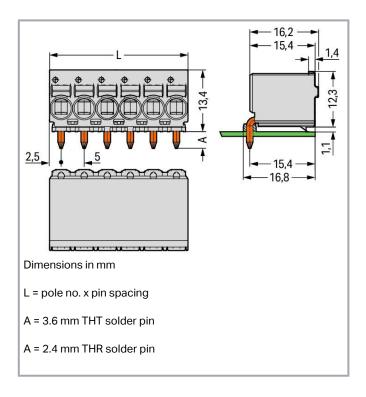

## Item description

- Universal connection for all conductor types
- Simple, push-in termination of solid and ferruled conductors
- Easy-to-use design does not require special tools
- Ability to wire while mated or unmated
- Integrated test ports for testing parallel to conductor entry
- Custom-installed solder pins

## Data Notes

Safety information

The picoMAX® Pluggable Connection System includes connectors without breaking capacity in accordance with DIN EN 61984. When used as intended, these connectors must not be connected /disconnected when live or under load. The circuit design should ensure header pins, which can be touched, are not live when unmated.

### Electrical data

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG Hansastr. 27

32423 Minden

Phone: +49571 887-0 | Fax: +49571 887-169 Email: info.de@wago.com | Web: www.wago.com

www.wago.com/2092-1380



## Ratings per IEC/EN

Ratings per	IEC/EN 60664-1
Nominal voltage (III/3)	250 V
Rated impulse voltage (III/3)	4 kV
Rated voltage (III/2)	320 V
Rated impulse voltage (III/2)	4 kV
Nominal voltage (II/2)	630 V
Rated surge voltage (II/2)	4 kV
Rated current	16 A
Legend (ratings)	(III / 2) ≙ Overvoltage category III / Pollution degree 2

## Ratings per UL 1059

Approvals per	UL 1059
Rated voltage UL (Use Group B)	300 V
Rated current UL (Use Group B)	15 A
Rated voltage UL (Use Group D)	300 V
Rated current UL (Use Group D)	10 A

## Connection data

Connection points	10
Total number of potentials	10
Number of connection types	1
Number of levels	1

### Connection 1

Connection technology	Push-in CAGE CLAMP®
Actuation type	Push-button
Actuation direction 1	Operation parallel to conductor entry
Solid conductor	0.2 2.5 mm² / 24 12 AWG
Fine-stranded conductor	0.2 2.5 mm² / 24 12 AWG
Fine-stranded conductor; with insulated ferrule	0.25 1.5 mm²
Fine-stranded conductor; with uninsulated ferrule	0.25 2.5 mm²
Strip length	9 10 mm / 0.35 0.39 inches
Conductor connection direction to PCB	0°
Pole number	10

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG

Hansastr. 27 32423 Minden

Phone: +49571 887-0 | Fax: +49571 887-169 Email: info.de@wago.com | Web: www.wago.com Do you have any questions about our products?

We are always happy to take your call at +49 (571) 887-44222.

www.wago.com/2092-1380



## Physical data

Pin spacing	5 mm / 0.197 inches
Width	50 mm / 1.969 inches
Height	13.4 mm / 0.528 inches
Depth	15.4 mm / 0.606 inches
Solder pin length	3.6 mm
Solder pin diameter	1.4 mm
Drilled hole diameter with tolerance	1.6 <sup>(±0.1)</sup> mm

#### **Mechanical Data**

Variable coding	No
Anti-rotation protection	Yes

## Plug-in connection

Contact type (pluggable connector)	Female connector/socket
Connector (connection type)	for PCB
Mismating protection	No
Plugging without loss of pin spacing	Yes
Mating direction to the PCB	0°
Locking of plug-in connection	none

## **PCB** contact

PCB contact THT	
-----------------	--

## **Material Data**

Note (material data)

Information on	matarial	cnocifications	aan ha	found hara
II II OLI HAHOH OH	ппагепаг	SUECINCATIONS	Carroe	TOUTIO HELE

Color	light gray
Material group	I
Insulation material	Polyphthalamide (PPA GF)
Flammability class per UL94	VO
Clamping spring material	Chrome-nickel spring steel (CrNi)
Contact material	Electrolytic copper (E <sub>Cu</sub> )
Contact plating	Tin
Fire load	0.025 MJ

 $\label{thm:condition} \textbf{Subject to changes. Please also observe the further product documentation!}$ 

WAGO GmbH & Co. KG

Hansastr. 27 32423 Minden

Phone: +49571 887-0 | Fax: +49571 887-169 Email: info.de@wago.com | Web: www.wago.com Do you have any questions about our products?

We are always happy to take your call at +49 (571) 887-44222.

www.wago.com/2092-1380



Weight	11.8 g
Environmental requirements	
Limit temperature range	-60 +100 °C

-35 ... +60 °C

## Commercial data

Processing temperature

Product Group	26 (picoMAX Connectors)
eCl@ss 10.0	27-44-04-02
eCl@ss 9.0	27-44-04-02
ETIM 8.0	EC002637
ETIM 7.0	EC002637
PU (SPU)	100 pcs
Packaging type	box
Country of origin	DE
GTIN	4050821165002
Customs tariff number	85366990990

## **Environmental Product Compliance**

RoHS Compliance Status	Compliant,No Exemption
------------------------	------------------------

## Approvals / Certificates

## General approvals

Logo Approval		Additional Approval Text	Certificate name
	Approval		
	СВ	IEC 61984	NL-49737
	DEKRA Certification B.V.		/A1
	CSA	C22.2 No. 158	2362521
	DEKRA Certification B.V.		
	CSA	C22.2	2362521
	DEKRA Certification B.V.		
	cURus	UL 1059	E45172

Subject to changes. Please also observe the further product documentation!

Underwriters Laboratories Inc.

WAGO GmbH & Co. KG

Hansastr. 27 32423 Minden

Phone: +49571 887-0 | Fax: +49571 887-169 Email: info.de@wago.com | Web: www.wago.com Do you have any questions about our products?

We are always happy to take your call at +49 (571) 887-44222.

www.wago.com/2092-1380



KEMA/KEUR DEKRA Certification B.V. EN 61984

102261 REV.2

71-



UL Underwriters Laboratories Inc. UL 1977 E45171

# **Downloads**

### **Documentation**

#### Additional Information

**Technical Section** 2019 Apr 3 pdf Download 2.0 MB Technical explanations

#### CAD/CAE-Data

#### **CAD** data

2D/3D Models 2092-1380 **URL** Download

## **PCB** Design

Symbol and Footprint 2092-1380

URL Download CAx data for your PCB design, consisting of "schematic symbols and PCB footprints",

## Supported formats:

- Accel EDA 14 & 15
- Altium 6 to current version
- Cadence Allegro
- DesignSpark
- **Eagle Libraries**
- KiCad
- Mentor Graphics BoardStation
- Mentor Graphics Design Architect
- Mentor Graphics Design Expedition 99 and 2000
- OrCAD 9.X PCB and Capture

Subject to changes. Please also observe the further product documentation!

allow easy integration of the WAGO component into your development environment.

WAGO GmbH & Co. KG Hansastr. 27

32423 Minden

Phone: +49571 887-0 | Fax: +49571 887-169 Email: info.de@wago.com | Web: www.wago.com

www.wago.com/2092-1380



- PADS PowerPCB 3, 3.5, 4.X, and 5.X
- PADS PowerPCB and PowerLogic 3.0
- PCAD 2000, 2001, 2002, 2004, and 2006
- Pulsonix 8.5 or newer
- STL
- 3D STEP
- TARGET 3001!
- View Logic ViewDraw
- Quadcept
- Zuken CadStar 3 and 4
- Zuken CR-5000 and CR-8000

PCB Component Libraries (EDA), PCB CAD Library Ultra Librarian

### CAE data

ZUKEN Portal 2092-1380 URL Download

## **Environmental Product Compliance**

Compliance Search

Environmental Product Compliance 2092-1380

URL

Download

1-conductor THT female connector angled; push-button; Push-in CAGE CLAMP®; 2.5 mm²; Pin spacing 5 mm; 10-pole; 1.4 mm Ø solder pin; 2,50 mm²; light gray

#### **Installation Notes**

Conductor termination


Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG Hansastr. 27 32423 Minden


Phone: +49571 887-0 | Fax: +49571 887-169 Email: info.de@wago.com | Web: www.wago.com

www.wago.com/2092-1380





Terminating fine-stranded conductors and removing all conductor types via push-buttons.



Solid and ferruled conductors are terminated by simply pushing them into unit.

### Marking




Pole marking via direct marking perpendicular to conductor entry.



Pole marking via factory direct marking.

## Testing



Testing via 1 mm Ø test pin – touch contact.

 $\label{thm:condition} \textbf{Subject to changes. Please also observe the further product documentation!}$ 

WAGO GmbH & Co. KG Hansastr. 27 32423 Minden

Phone: +49571 887-0 | Fax: +49571 887-169 Email: info.de@wago.com | Web: www.wago.com