

## **Features**

- · Single General-Purpose Switching Transistor
- Halogen Free Available Upon Request By Adding Suffix "-HF"
- · Moisture Sensitivity Level 1
- Epoxy Meets UL 94 V-0 Flammability Rating
- Lead Free Finish/RoHS Compliant ("P" Suffix Designates RoHS Compliant. See Ordering Information)

# Maximum Ratings @ 25°C Unless Otherwise Specified

• Operating Junction Temperature Range: -55°C to +150°C

Storage Temperature Range: -55°C to +150°C

Thermal Resistance: 1250°C/W Junction to Ambient (1)

Thermal Resistance: 212°C/W Junction to Ambient (2)

Parameter	Symbol	Rating	Unit
Collector-Base Voltage	V <sub>CBO</sub>	60	V
Collector-Emitter Voltage	V <sub>CEO</sub>	40	V
Emitter-Base Voltage	V <sub>EBO</sub>	6	V
Collector Current	I <sub>C</sub>	200	mA
Power Discipation	P <sub>D</sub>	100 (1)	mW
Power Dissipation	l P	590 <sup>(2)</sup>	mW

Note:1.Device mounted on an FR4 PCB, single-sided copper, tin-plated and standard footprint.

2.Device mounted on an FR4 PCB, single-sided copper, tin-plated, mounting pad for collector 1cm<sup>2</sup>.


## Marking: 1N

## **Internal Structure**




- 1. BASE
- 2. EMITTER
- 3. COLLECTOR

# NPN Plastic Encapsulate Amplifier

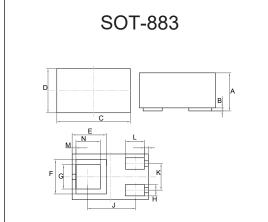

DIMENSIONS						
DIM	INCHES		MM		NOTE	
DIIVI	MIN	MAX	MIN	MAX	NOTE	
Α	0.018	0.022	0.45	0.55		
В	0.000	0.004	0.01	0.10		
С	0.037	0.041	0.95	1.05		
D	0.022	0.026	0.55	0.65		
E	0.018		0.450		REF.	
F	0.018		0.450		RE₱.	
G	0.011	0.015	0.27	0.37		
Н	0.004	0.008	0.10	0.20		
J	0.025		0.635		REF.	
K	0.012	0.016	0.30	0.40		
L	0.008	0.012	0.20	0.30		
M	0.002		0.050		REF.	
N	0.011	0.015	0.27	0.37		

## Suggested Solder Pad Layout

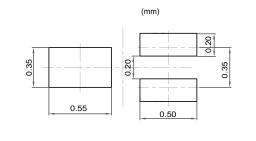





# Electrical Characteristics @ 25°C Unless Otherwise Specified


Parameter	Symbol	Min	Тур	Max	Units	Conditions
Collector-Base Breakdown Voltage	$V_{(BR)CBO}$	60			V	$I_{C}=10\mu A, I_{E}=0$
Collector-Emitter Breakdown Voltage	V <sub>(BR)CEO</sub>	40			V	$I_C=1$ mA, $I_B=0$
Emitter-Base Breakdown Voltage	$V_{(BR)EBO}$	6			V	$I_{E}=10\mu A, I_{C}=0$
Collector-Base Cutoff Current	I <sub>CBO</sub>			100	nA	$V_{CB}$ =30V, $I_E$ =0
Collector Cutoff Current	I <sub>CEX</sub>			50	nA	V <sub>CE</sub> =30V, V <sub>EB(OFF)</sub> =3V
Emitter-Base Cutoff Current	I <sub>EBO</sub>			100	nA	$V_{EB}=5V$ , $I_{C}=0$
DC Current Gain	h <sub>FE</sub>	100		300		V <sub>CE</sub> =1V, I <sub>C</sub> =-10mA
Collector-Emitter Saturation Voltage	V <sub>CE(sat)</sub>			0.3	V	I <sub>C</sub> =50mA, I <sub>B</sub> =5mA
Base-Emitter Saturation Voltage	V <sub>BE(sat)</sub>			0.95	V	I <sub>C</sub> =50mA, I <sub>B</sub> =5mA
Transition Frequency	f <sub>T</sub>	300			MHz	V <sub>CE</sub> =20V, I <sub>C</sub> =10mA, f=100MHz
Delay Time	t <sub>d</sub>			35	ns	V <sub>CC</sub> =3V, I <sub>C</sub> =10mA
Rise Time	t <sub>r</sub>			35	ns	$V_{BE(OFF)}$ =0.5V, $I_{B1}$ =1mA
Storage Time	ts			200	ns	V <sub>CC</sub> =3V, I <sub>C</sub> =10mA
Fall Time	t <sub>f</sub>			50	ns	I <sub>B1</sub> =I <sub>B2</sub> =1mA





## **Curve Characteristics**

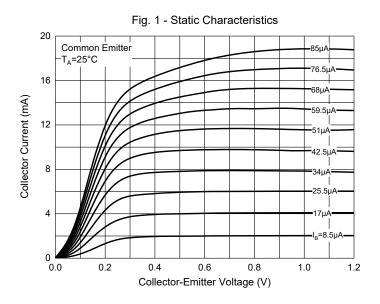


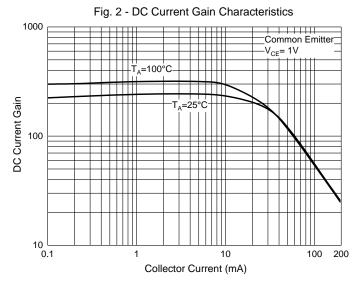

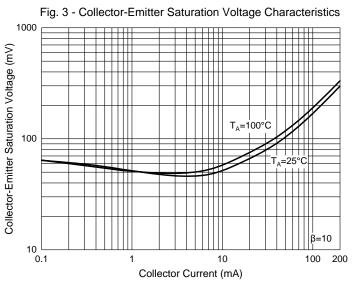

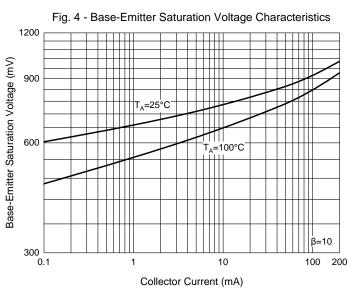

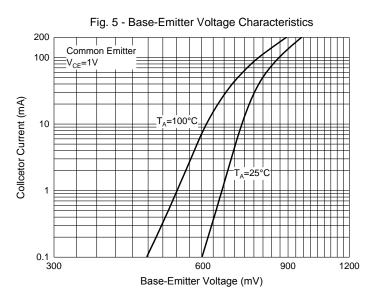

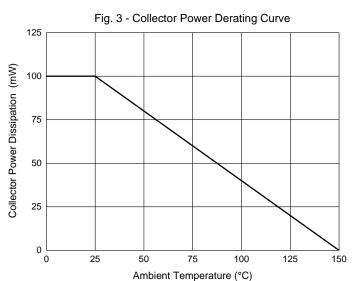



## **Ordering Information**

Device	Packing
Part Number-TP	Tape&Reel: 10Kpcs/Reel

Note: Adding "-HF" Suffix For Halogen Free, eg. Part Number-TP-HF

#### \*\*\*IMPORTANT NOTICE\*\*\*

**Micro Commercial Components Corp**. reserves the right to make changes without further notice to any product herein to make corrections, modifications, enhancements, improvements, or other changes. **Micro Commercial Components Corp**. does not assume any liability arising out of the application or use of any product described herein; neither does it convey any license under its patent rights, nor the rights of others. The user of products in such applications shall assume all risks of such use and will agree to hold **Micro Commercial Components Corp**, and all the companies whose products are represented on our website, harmless against all damages.

#### \*\*\*LIFE SUPPORT\*\*\*

MCC's products are not authorized for use as critical components in life support devices or systems without the express written approval of Micro Commercial Components Corporation.

## \*\*\*CUSTOMER AWARENESS\*\*\*

Counterfeiting of semiconductor parts is a growing problem in the industry. Micro Commercial Components (MCC) is taking strong measures to protect ourselves and our customers from the proliferation of counterfeit parts. MCC strongly encourages customers to purchase MCC parts either directly from MCC or from Authorized MCC Distributors who are listed by country on our web page cited below. Products customers buy either from MCC directly or from Authorized MCC Distributors are genuine parts, have full traceability, meet MCC's quality standards for handling and storage. MCC will not provide any warranty coverage or other assistance for parts bought from Unauthorized Sources. MCC is committed to combat this global problem and encourage our customers to do their part in stopping this practice by buying direct or from authorized distributors.

Rev.3-1-01012019 4/4 MCCSEMI.COM