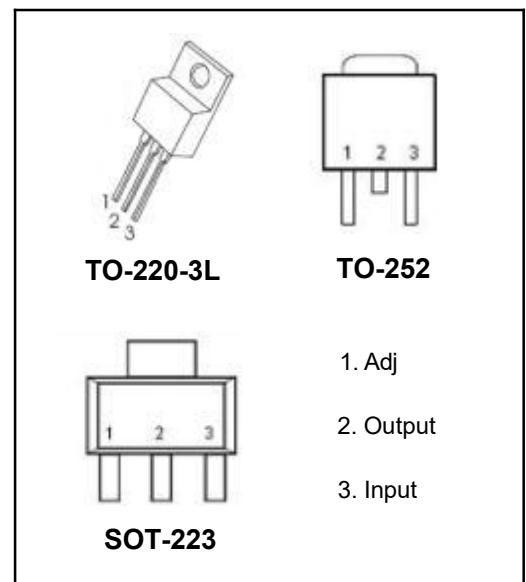
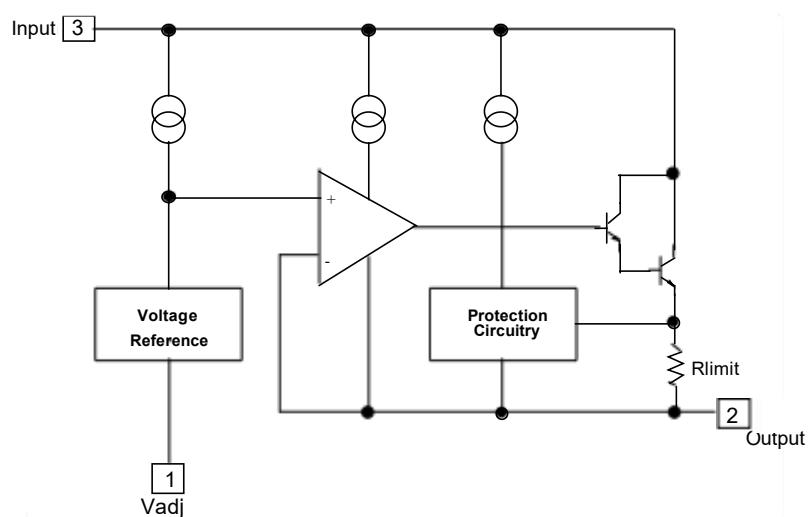


**DESCRIPTION**

This monolithic integrated circuit is an adjustable 3-terminal positive voltage regulator designed to supply more than 1.5A of load current with an output voltage adjustable over a 1.2 to 37V. It employs internal current limiting , thermal shut-down and safe area compensation.

**FEATURE**

- ⌘ Internal thermal overload protection
- ⌘ Internal short circuit current limiting
- ⌘ Output transistor safe operating area compensation

**Internal Block Diagram**

**Absolute Maximum Ratings**

| Symbol                         | Parameter                                 |         | Value              | Unit |
|--------------------------------|---|---------|--------------------|------|
| V <sub>I</sub> -V <sub>O</sub> | Input-Output Voltage Differential         |         | 40                 | V    |
| T <sub>LEAD</sub>              | Lead Temperature                          |         | 230                | °C   |
| P <sub>D</sub>                 | Power Dissipation                         | TO-220  | Internally limited | W    |
|                                |   | TO-252  | 2                  |      |
|                                |   | SOT-223 | 1                  |      |
| T <sub>J</sub>                 | Operating Junction Temperature Range      |         | 0~125              | °C   |
| T <sub>stg</sub>               | Storage Temperature Range                 |         | -55~125            |      |
| ΔV <sub>O</sub> /ΔT            | Temperature Coefficient of Output Voltage |         | ±0.02              | %/°C |

**ELECTRICAL CHARACTERISTICS**


 (V<sub>O</sub>-V<sub>I</sub>=5V, I<sub>O</sub>=0.5A, 0°C≤T<sub>J</sub>≤+125°C , I<sub>MAX</sub>=1.5A, P<sub>DMAX</sub>=20W, unless otherwise specified)

| Parameter   | Symbol              | Test conditions  | MIN  | TYP        | MAX       | UNIT              |
|---|---------------------|--|------|------------|-----------|-------------------|
| Line Regulation(note1)                                | R <sub>line</sub>   | T <sub>A</sub> =25°C<br>3V≤V <sub>I</sub> -V <sub>O</sub> ≤40V   |      | 0.01       | 0.04      | %/V               |
|   |                     | 3V≤V <sub>I</sub> -V <sub>O</sub> ≤40V   |      | 0.02       | 0.07      |                   |
| Load Regulation(note1)                                | R <sub>load</sub>   | T <sub>A</sub> =25°C , 10mA≤I <sub>O</sub> ≤I <sub>MAX</sub><br>V <sub>O</sub> <5V<br>V <sub>O</sub> ≥5V   |      | 18<br>0.4  | 25<br>0.5 | mV                |
|   |                     | 10mA≤I <sub>O</sub> ≤I <sub>MAX</sub><br>V <sub>O</sub> <5V<br>V <sub>O</sub> ≥5V  |      | 40<br>0.8  | 70<br>1.5 |                   |
| Adjustable Pin Current                                | I <sub>ADJ</sub>    | -  |      | 46         | 100       | μA                |
| Adjustable Pin Current Change                         | ΔI <sub>ADJ</sub>   | 3V≤V <sub>I</sub> -V <sub>O</sub> ≤40V<br>10mA≤I <sub>O</sub> ≤I <sub>MAX</sub> , P <sub>D</sub> ≤P <sub>MAX</sub>   |      | 2.0        | 5         |                   |
| Reference Voltage                                     | V <sub>REF</sub>    | 3V≤V <sub>IN</sub> -V <sub>O</sub> ≤40V<br>10mA≤I <sub>O</sub> ≤I <sub>MAX</sub> , P <sub>D</sub> ≤P <sub>MAX</sub>  | 1.20 | 1.25       | 1.30      | V                 |
| Temperature Stability                                 | S <sub>T</sub>      | -  |      | 0.7        |           | %/ V <sub>O</sub> |
| Minimum Load Current to Maintain Regulation           | I <sub>L(MIN)</sub> | V <sub>I</sub> -V <sub>O</sub> =40V  |      | 3.5        | 12        | mA                |
| Maximum Output Current                                | I <sub>O(MAX)</sub> | V <sub>I</sub> -V <sub>O</sub> ≤15V, P <sub>D</sub> ≤P <sub>MAX</sub><br>V <sub>I</sub> -V <sub>O</sub> ≤40V, P <sub>D</sub> ≤P <sub>MAX</sub><br>T <sub>A</sub> = 25 °C | 1.0  | 2.2<br>0.3 |           | A                 |
| RMS Noise,% of V <sub>OUT</sub>                       | e <sub>N</sub>      | T <sub>A</sub> =25°C , 10Hz≤f≤10KHz  |      | 0.003      | 0.01      | %/ V <sub>O</sub> |
| Ripple Rejection                                      | RR                  | V <sub>O</sub> =10V, f=120Hz<br>without C <sub>ADJ</sub><br>C <sub>ADJ</sub> = 10 μF ( note2 )   | 66   | 60<br>75   |           | dB                |
| Long-Term Stability,T <sub>J</sub> =T <sub>HIGH</sub> | ST                  | T <sub>A</sub> = 25 °C for end point measurements, 1 0 0 0 HR  |      | 0.3        | 1         | %                 |
| Thermal Resistance Junction to case                   | R <sub>θJC</sub>    | -  |      | 5          |           | °C/W              |

**Notes:**

1. Load and line regulation are specified at constant junction temperature. Change in V<sub>D</sub> due to heating effects must be taken into account separately. Pulse testing with low duty is used.(P<sub>MAX</sub>=20W)
- 2.C<sub>ADJ</sub> . when used, is connected between the adjustment pin and ground.

## Typical Application

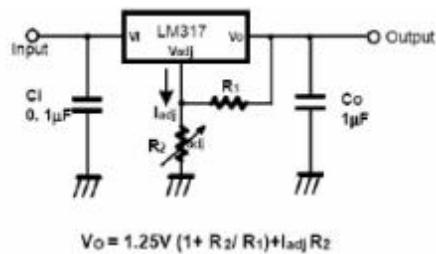


$C_i$  is required when regulator is located an appreciable distance from power supply filter.

$C_o$  is not needed for stability , however, it does improve transient response.


Since  $I_{adj}$  is controlled to less than 100μA, the error associated with this term is negligible in most applications.

## ■ TO-220-3L 封裝外形圖

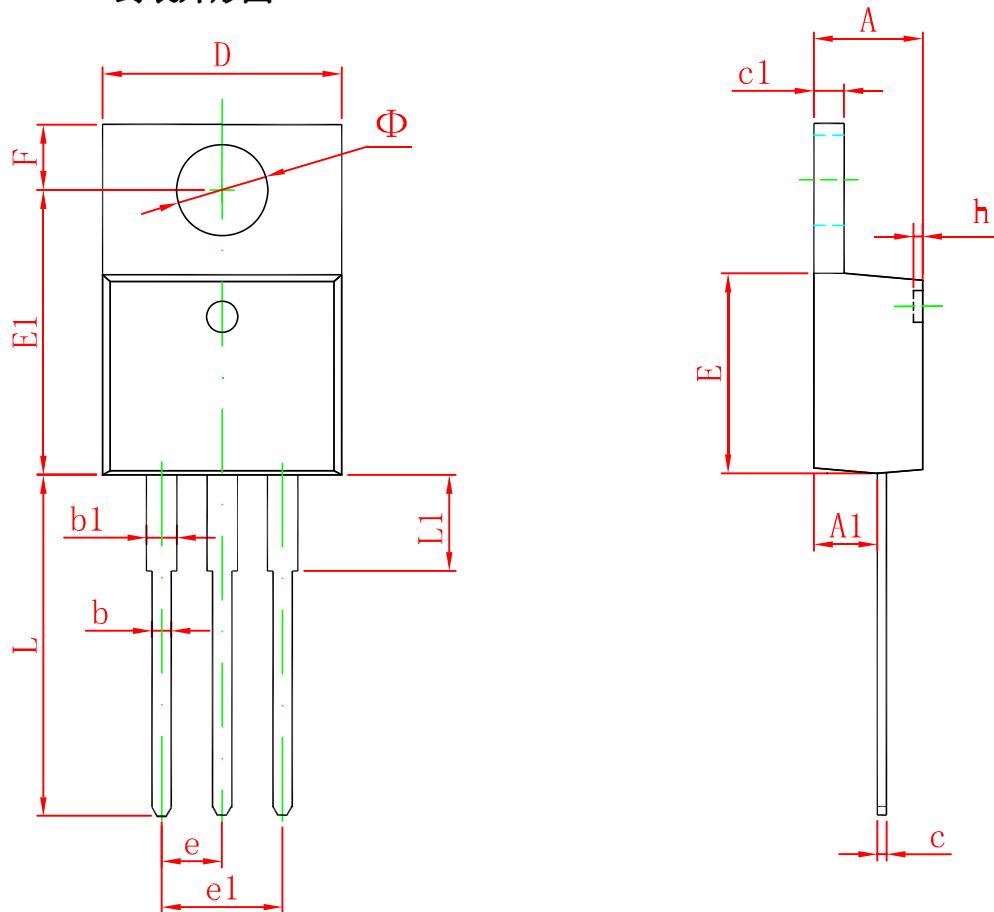

| Symbol | Dimensions In Millimeters |        | Dimensions In Inches |       |
|--------|---------------------------|--------|----------------------|-------|
|        | Min                       | Max    | Min                  | Max   |
| A      | 4.470                     | 4.670  | 0.176                | 0.184 |
| A1     | 2.520                     | 2.820  | 0.099                | 0.111 |
| b      | 0.710                     | 0.910  | 0.028                | 0.036 |
| b1     | 1.170                     | 1.370  | 0.046                | 0.054 |
| c      | 0.310                     | 0.530  | 0.012                | 0.021 |
| c1     | 1.170                     | 1.370  | 0.046                | 0.054 |
| D      | 10.010                    | 10.310 | 0.394                | 0.406 |
| E      | 8.500                     | 8.900  | 0.335                | 0.350 |
| E1     | 12.060                    | 12.460 | 0.475                | 0.491 |
| e      | 2.540 TYP                 |        | 0.100 TYP            |       |
| e1     | 4.980                     | 5.180  | 0.196                | 0.204 |
| F      | 2.590                     | 2.890  | 0.102                | 0.114 |
| h      | 0.000                     | 0.300  | 0.000                | 0.012 |
| L      | 13.400                    | 13.800 | 0.528                | 0.543 |
| L1     | 3.560                     | 3.960  | 0.140                | 0.156 |
| Φ      | 3.735                     | 3.935  | 0.147                | 0.155 |


## ■ SOT223 封裝外形圖

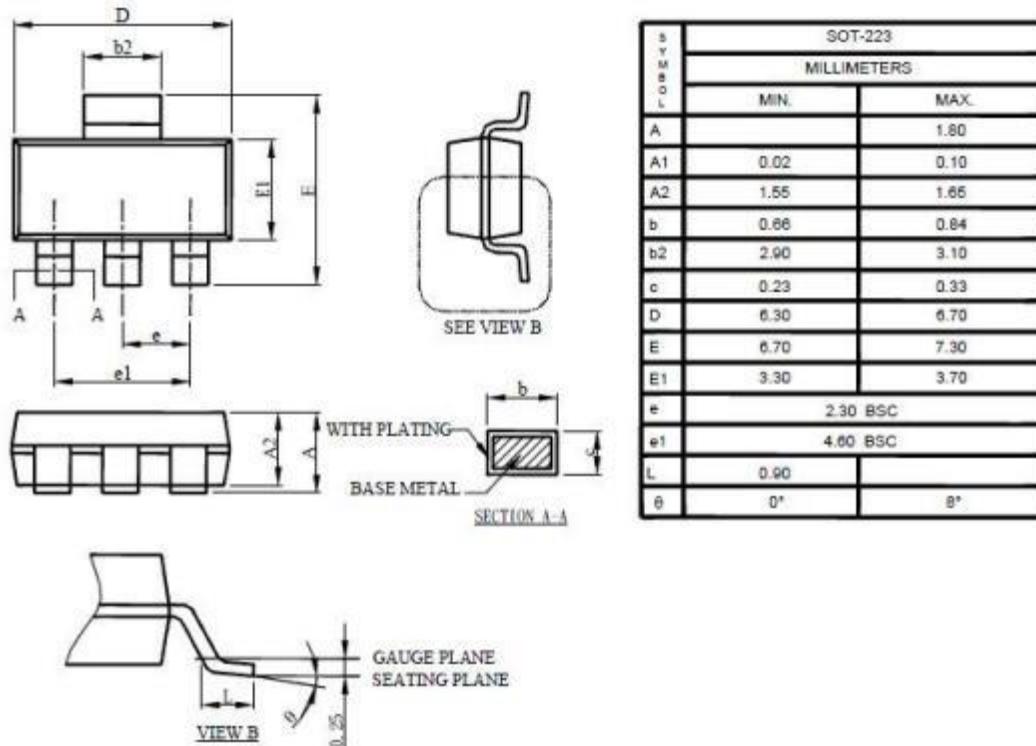

## Note:

1. Refer to JEDEC TO-261AA.
2. Dimension D and E1 are determined at the outermost extremes of the plastic body exclusive of mold flash, tie bar burrs, gate burrs, and interlead flash, but including any mismatch between the top and bottom of the plastic body.
3. Controlling dimension is millimeter, converted inch dimensions are not necessarily exact.

## ■ TO-252 封裝外形圖

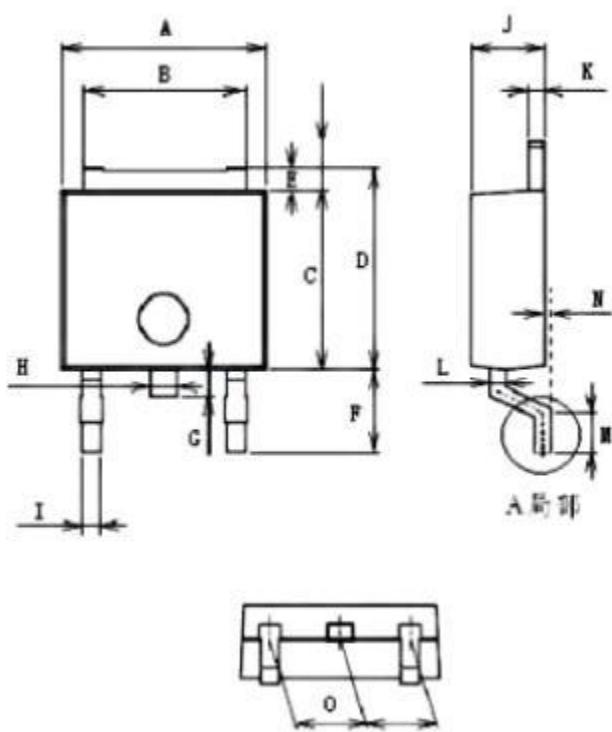

Unit: mm

| Item | Min  | Max  |
|------|------|------|
| A    | 6.40 | 6.70 |
| B    | 5.20 | 5.40 |
| C    | 6.00 | 6.30 |
| D    | 6.55 | 6.85 |
| E    | 0.45 | 0.60 |
| F    | 3.07 | 3.35 |
| G    | 0.85 | 1.05 |
| H    | 0.75 | 0.95 |
| I    | 0.55 | 0.75 |
| J    | 2.20 | 2.40 |
| K    | 0.43 | 0.58 |
| L    | 0.43 | 0.58 |
| M    | 0.90 | 1.10 |
| N    | 0.90 | 1.10 |
| O    | 2.20 | 2.40 |

## Ordering information

| Order Code    | Package | Baseqty | Deliverymode  |
|---------------|---------|---------|---------------|
| UMW LM317DCYR | SOT-223 | 2500    | Tape and reel |
| UMW LM317T    | TO-220  | 1000    | Tube and box  |
| UMW LM317MDT  | TO-252  | 2500    | Tape and reel |

### 聲明:

- 我公司保留說明書更改權利，恕不另行通知；
- 任何半導體產品特性條件下都有一定失效或者發生故障的可能， 買方有責任在使用我司產品進行系統設計和整機製造時遵守安全標準并採取安全措施， 以避免潛在失敗風險可能造成人身傷害或財產損失情況的發生；
- 產品提升永無止境，我司將竭誠為客戶提供更優秀的半導體產品。