


Schottky PowerMod



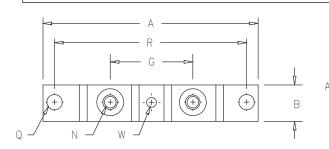



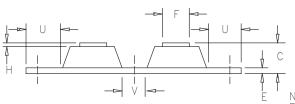

Baseplate D=Doubler

Common Cathode

Notes: Baseplate: Nickel plated copper

Dim. Inches		Millimeters		
Min.	Max.	Min.	Max.	Notes
A	3.630		92.20	
	0.800	17.78	20.32 16.00	
F 0.490	0.130	3.05 12.45		
G 1.375	BSC			
H 0.010 N 0 0.275		0.25 6.99	 7.37	1/4-20 Dia.
R 3.150				Did.
	0.340	7.92	8.64	D.
W 0.180	0.195	4.57	4.95	Dia.

Microsemi Catalog Number CPT40130*	Industry Part Number MBR40030CT		Repetitive Peak Reverse Voltage 30V
CPT40135*	400CNQ035	35V	35V
CPT40140*	400CNQ040	40V	40V
CPT40145*	400CNQ045 MBRP40045CTL	45V	45V

*Add Suffix A for Common Anode, D for Doubler

- Schottky Barrier Rectifier
- Guard Ring Protection
- 400 Amperes/30 to 45 Volts
- 150°C Junction Temperature
- Reverse Energy Tested
- ROHS Compliant

Electrical Characteristics

Average forward current per pkg Average forward current per leg Maximum surge current per leg Maximum repetitive reverse current per leg |R(OV) 2 Amps Max peak forward voltage per leg VFM 0.57 Volt Max peak forward voltage per leg Max peak forward voltage per leg Max peak reverse current per leg Max peak reverse current per leg Typical junction capacitance per leg

|F(AV) 400 Amps [F(AV) 200 Amps FSM 3000 Amps 0.57 Volts V_{FM} 0.49 Volts ^IRM 3.5 A ^IRM 10 mA $C_{i,j}$ 7000 pF

 ^{T}C = 79°C, Square wave, $^{R}\Theta$ JC = 0.16°C/W ^{R}C = 79°C, Square wave, $^{R}\Theta$ JC = 0.32°C/W 8.3ms, half sine, TJ = 150℃ f = 1 KHZ, 25°C, 1 μ sec square wave FM = 200A:TJ = 25°C*

|FM| = 200A:TJ = 150°C*VRRM, TJ = 125°C* $VRRM, TJ = 25^{\circ}C^{*}$ $V_R = 5.0V, T_C = 25^{\circ}C$

*Pulse test: Pulse width 300 µsec, Duty cycle 2%

Thermal and Mechanical Characteristics

Storage temp range Operating junction temp range Max thermal resistance per leg Max thermal resistance per pkg Typical thermal resistance (greased) Terminal Torque Mounting Base Torque (outside holes) Mounting Base Torque (center hole) center hole must be torqued first Weight

TSTG ΤJ R OJC R OJC R ocs

-55℃ to 150℃ -55°C to 150°C 0.32°C/W Junction to case 0.16°C/W Junction to case 0.08°C/W Case to sink 35-40 inch pounds maximum 30-40 inch pounds maximum 8-10 inch pounds maximum


2.8 ounces (77 grams) typical



CPT40130 - CPT40145

Figure 3

Figure 1 Typical Forward Characteristics — Per Leg

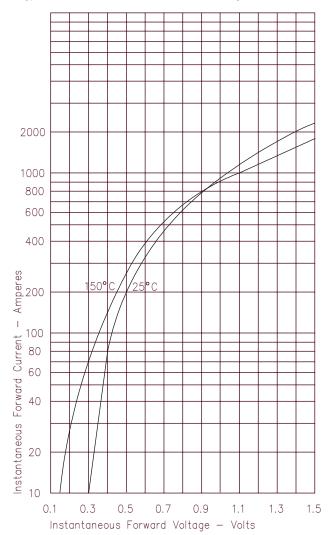

Typical Junction Capacitance — Per Leg 100,000 60,000 40,000 20,000 Capacitance 10,000 6000 4000 Junction 2000 1000 5.0 0.5 10 50 100 0.1 1.0

Figure 4

Forward Current Derating — Per Leg

Reverse Voltage - Volts



Figure 2 Typical Reverse Characteristics — Per Leg


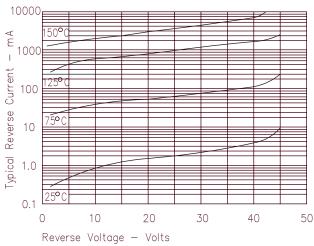


Figure 5 Maximum Forward Power Dissipation — Per Leg



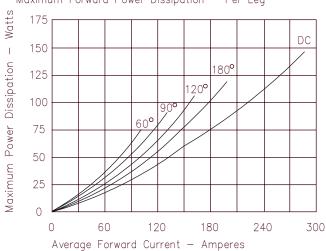

DISCLAIMER

The information contained in the document (unless it is publicly available on the Web without access restrictions) is PROPRIETARY AND CONFIDENTIAL information of Microsemi and cannot be copied, published, uploaded, posted, transmitted, distributed or disclosed or used without the express duly signed written consent of Microsemi. If the recipient of this document has entered into a disclosure agreement with Microsemi, then the terms of such Agreement will also apply. This document and the information contained herein may not be modified, by any person other than authorized personnel of Microsemi. No license under any patent, copyright, trade secret or other intellectual property right is granted to or conferred upon you by disclosure or delivery of the information, either expressly, by implication, inducement, estoppels or otherwise. Any license under such intellectual property rights must be approved by Microsemi in writing signed by an officer of Microsemi.

Microsemi reserves the right to change the configuration, functionality and performance of its products at anytime without any notice. This product has been subject to limited testing and should not be used in conjunction with life-support or other mission-critical equipment or applications. Microsemi assumes no liability whatsoever, and Microsemi disclaims any express or implied warranty, relating to sale and/or use of Microsemi products including liability or warranties relating to fitness for a particular purpose, merchantability, or infringement of any patent, copyright or other intellectual property right. Any performance specifications believed to be reliable but are not verified and customer or user must conduct and complete all performance and other testing of this product as well as any user or customers final application. User or customer shall not rely on any data and performance specifications or parameters provided by Microsemi. It is the customer's and user's responsibility to independently determine suitability of any Microsemi product and to test and verify the same. The information contained herein is provided "AS IS, WHERE IS" and with all faults, and the entire risk associated with such information is entirely with the User. Microsemi specifically disclaims any liability of any kind including for consequential, incidental and punitive damages as well as lost profit. The product is subject to other terms and conditions which can be located on the web at http://www.microsemi.com/legal/tnc.asp

Life Support Application

Seller's Products are not designed, intended, or authorized for use as components in systems intended for space, aviation, surgical implant into the body, in other applications intended to support or sustain life, or for any other application in which the failure of the Seller's Product could create a situation where personal injury, death or property damage or loss may occur (collectively "Life Support Applications").

Buyer agrees not to use Products in any Life Support Applications and to the extent it does it shall conduct extensive testing of the Product in such applications and further agrees to indemnify and hold Seller, and its officers, employees, subsidiaries, affiliates, agents, sales representatives and distributors harmless against all claims, costs, damages and expenses, and attorneys' fees and costs arising, directly or directly, out of any claims of personal injury, death, damage or otherwise associated with the use of the goods in Life Support Applications, even if such claim includes allegations that Seller was negligent regarding the design or manufacture of the goods.

Buyer must notify Seller in writing before using Seller's Products in Life Support Applications. Seller will study with Buyer alternative solutions to meet Buyer application specification based on Sellers sales conditions applicable for the new proposed specific part.