



Quad, SPST Analog Switches

DG308A/DG309

General Description


The DG308A/DG309 are quad, single-pole-single-throw (SPST) analog switches. The DG308A is normally open (SPST, NO), while the DG309 is normally closed (SPST, NC). Both parts feature fast switching speeds and low on-resistance over the analog range. Other features include a turn-on time under 120ns, a turn-off time under 90ns, and a channel on-resistance of 60Ω . CMOS inputs provide reduced input loading and very low leakage currents.

Both parts feature a 44V maximum breakdown voltage rating that allows 30V peak-to-peak switch-off blocking capacity. The DG308A/DG309 can be used with split supplies ($\pm 5V$ to $\pm 20V$) or a single positive supply (+5V to +30V), while retaining CMOS-logic-compatible inputs.

Applications

- Sample-and-Hold Circuits
- Test Equipment
- Communications Systems
- PBX, PABX
- Guidance and Control Systems
- Heads-Up Displays
- Military Radios

Typical Operating Circuit

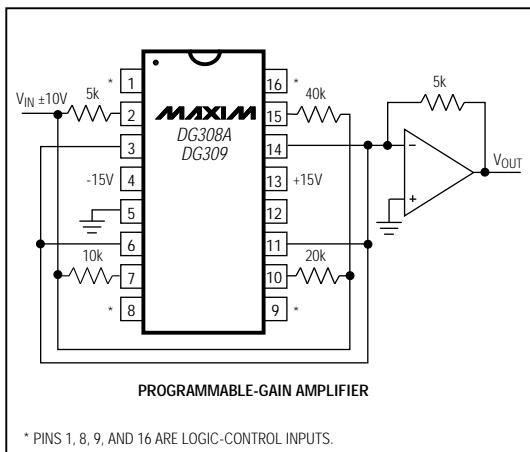

Features

- ♦ **60Ω $r_{DS(ON)}$**
- ♦ **Single/Bipolar-Supply Operation**
- ♦ **CMOS Logic Compatible**
- ♦ **Monolithic, Low-Power CMOS Design**

Ordering Information

PART	TEMP. RANGE	PIN-PACKAGE
DG308ACJ	$0^\circ C$ to $+70^\circ C$	16 Plastic DIP
DG308ACY	$0^\circ C$ to $+70^\circ C$	16 Narrow SO
DG308ACK	$0^\circ C$ to $+70^\circ C$	16 CERDIP
DG308AC/D	$0^\circ C$ to $+70^\circ C$	Dice*
DG308ADJ	$-40^\circ C$ to $+85^\circ C$	16 Plastic DIP
DG308ADY	$-40^\circ C$ to $+85^\circ C$	16 Narrow SO
DG308ADK	$-40^\circ C$ to $+85^\circ C$	16 CERDIP
DG308AAK	$-55^\circ C$ to $+125^\circ C$	16 CERDIP**
DG309CJ	$0^\circ C$ to $+70^\circ C$	16 Plastic DIP
DG309CY	$0^\circ C$ to $+70^\circ C$	16 Narrow SO
DG309CK	$0^\circ C$ to $+70^\circ C$	16 CERDIP
DG309C/D	$0^\circ C$ to $+70^\circ C$	Dice*
DG309DJ	$-40^\circ C$ to $+85^\circ C$	16 Plastic DIP
DG309DY	$-40^\circ C$ to $+85^\circ C$	16 Narrow SO
DG309DK	$-40^\circ C$ to $+85^\circ C$	16 CERDIP
DG309AK	$-55^\circ C$ to $+125^\circ C$	16 CERDIP**

* Contact factory for dice specifications.

** Contact factory for availability and processing to MIL-STD-883.

Pin Configuration/Truth Table

TOP VIEW	
IN1	1
D1	2
S1	3
V-	4
GND	5
S4	6
D4	7
IN4	8
IN2	16
D2	15
S2	14
V+	13
N.C.	12
S3	11
D3	10
IN3	9

DIP/SO

TRUTH TABLE		
LOGIC	DG308A	DG309
0	OFF	ON
1	ON	OFF

Quad, SPST Analog Switches

ABSOLUTE MAXIMUM RATINGS

Voltage Referenced to V-			
V+	+44V		
GND	+25V		
Digital Inputs Vs, VD	(V- - 2V) to (V+ + 2V) or 20mA, whichever occurs first		
Current into Any Terminal (except S or D)	30mA		
Continuous Current (S or D)	20mA		
Peak Current (S or D) (pulsed at 1ms, 10% duty cycle max)	70mA		
Operating Temperature Ranges			
DG308AC/DG309C	0°C to +70°C
DG308AD/DG309D	-40°C to +85°C
DG308AAK/DG309AK	-55°C to +125°C
Storage Temperature Range	-65°C to +150°C
Lead Temperature (soldering, 10sec)	+300°C

Stresses beyond those listed under "Absolute Maximum Ratings" may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated in the operational sections of the specifications is not implied. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.

ELECTRICAL CHARACTERISTICS

(V+ = 15V, V- = -15V, TA = TMIN to TMAX, unless otherwise noted.) (Note 2)

PARAMETER	SYMBOL	CONDITIONS	DG30_AK			DG30_C/D			UNITS	
			MIN	TYP	MAX	MIN	TYP	MAX		
SWITCH										
Analog Signal Range	VANALOG		TA = +25°C	-15	15	-15	15		V	
Drain-Source On-Resistance	rDS(ON)	VIN = 11V (DG308A), VIN = 3.5V (DG309), IS = 1mA, VD = 10V or -10V	TA = +25°C, TMIN	60	100	60	100		Ω	
			TA = TMAX	95	150	80	125			
Source-Off Leakage Current	IS(OFF)	VIN = 3.5V (DG308A), VIN = 11V (DG309), VS = 14V, VD = -14V	TA = +25°C	-1	0.1	1	-5	0.1	5	
			TA = TMAX	-100	100	-100	100		nA	
		VIN = 3.5V (DG308A), VIN = 11V (DG309), VS = -14V, VD = 14V	TA = +25°C	-1	-0.1	1	-5	0.1	5	
			TA = TMAX	-100	100	-100	100			
Drain-Off Leakage Current	ID(OFF)	VIN = 3.5V (DG308A), VIN = 11V (DG309), VS = 14V, VD = -14V	TA = +25°C	-1	0.1	1	-5	0.1	5	
			TA = TMAX	-100	100	-100	100		nA	
		VIN = 3.5V (DG308A), VIN = 11V (DG309), VS = -14V, VD = 14V	TA = +25°C	-1	0.1	1	-5	0.1	5	
			TA = TMAX	-100	100	-100	100			
Drain-On Leakage Current	ID(ON)	VIN = 11V (DG308A), VIN = 3.5V (DG309), VS = VD = +14V	TA = +25°C	-2	0.1	2	-5	0.1	5	
			TA = TMAX	-200	200	-200	200		nA	
		VIN = 11V (DG308A), VIN = 3.5V (DG309), VS = VD = -14V	TA = +25°C	-2	0.1	2	-5	0.1	5	
			TA = TMAX	-200	200	-200	200			
INPUT										
Input Current with Input Voltage High	IINH	VIN = 15V	TA = +25°C, TMAX	-1	0.001	1	-1	0.001	1	µA
Input Current with Input Voltage Low	IINL	VIN = 0V	TA = +25°C, TMAX	-1	-0.001	1	-1	0.001	1	µA

Quad, SPST Analog Switches

ELECTRICAL CHARACTERISTICS (continued)

(V₊ = 15V, V₋ = -15V, TA = T_{MIN} to T_{MAX}, unless otherwise noted.) (Note 2)

PARAMETER	SYMBOL	CONDITIONS	DG30_AK			DG30_C/D			UNITS	
			MIN	TYP	MAX	MIN	TYP	MAX		
SUPPLY										
Positive Supply Current	I ₊	All channels on or off, V _{IN} = 0V or 15V	TA = +25°C	-10	0.001	10	-100	0.001	100	μA
			TA = T _{MAX}			100			100	
Negative Supply Current	I ₋	All channels on or off, V _{IN} = 0V or 15V	TA = +25°C	-10	-0.001	10	-100	-0.001	100	μA
			TA = T _{MAX}			-100			-100	
DYNAMIC										
Turn-On Time	t _{ON}	Figure 1		130	200		130	200	ns	
Turn-Off Time	t _{OFF}	Figure 1		90	150		90	150	ns	
Charge Injection	Q	C _L = 0.01μF, V _{GEN} = 0V, R _{GEN} = 0Ω		-10			-10		pC	
Off Isolation (Note 3)	OIRR	V _{IN} = 0V (DG308A), V _{IN} = 15V (DG309), Z _L = 75Ω, V _S = 2Vp-p, f = 500kHz		78			78		dB	
Source-Off Capacitance	C _{S(OFF)}	V _{IN} = 0V (DG308A), V _{IN} = 15V (DG309), f = 140kHz, V _S = 0V		11			11		pF	
Drain-Off Capacitance	C _{D(OFF)}	V _{IN} = 0V (DG308A), V _{IN} = 15V (DG309), f = 140kHz, V _S = 0V		8			8		pF	
Channel-On Capacitance	C _{D(ON)} + C _{S(ON)}	V _{IN} = 0V (DG308A), V _{IN} = 15V (DG309), V _D = V _S = 0V		27			27		pF	

Note 1: All leads are soldered or welded to the PC board.

Note 2: The algebraic convention where the most negative value is a minimum and the most positive value a maximum is used in this data sheet.

Note 3: Off isolation = 20log10 V_D/V_S, V_D = output, V_S = input to off switch.

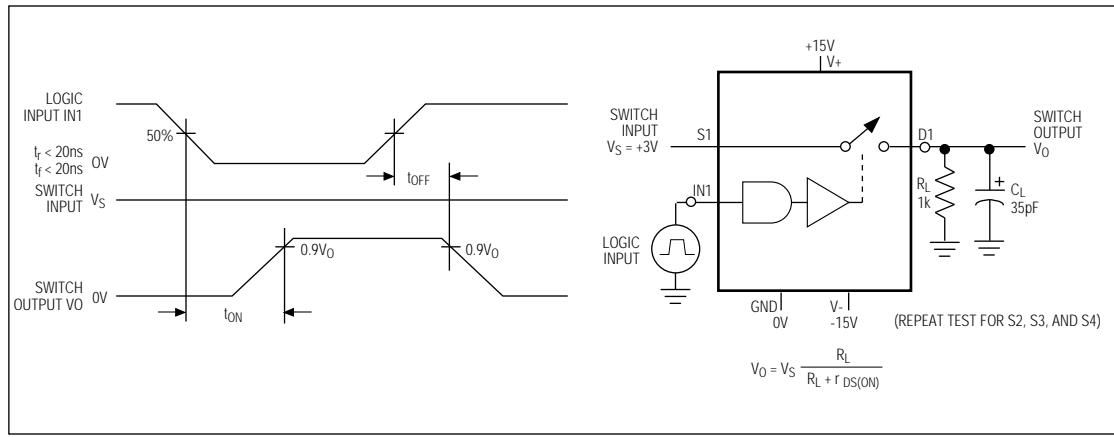



Figure 1. Switching-Time Test Circuit

Quad, SPST Analog Switches


Typical Operating Characteristics

($T_A = +25^\circ\text{C}$, unless otherwise noted.)


DRAIN-SOURCE ON-RESISTANCE
vs. DRAIN VOLTAGE & POWER SUPPLIES

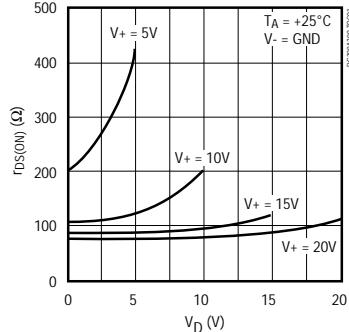


DRAIN-SOURCE ON-RESISTANCE
vs. DRAIN VOLTAGE & POWER SUPPLIES

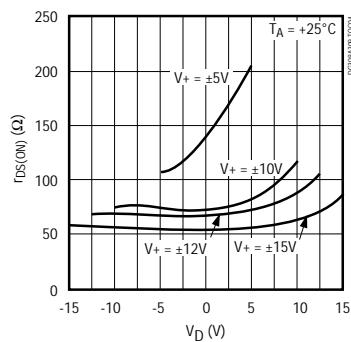

POWER-SUPPLY CURRENT
AND VOLTAGE vs. TEMPERATURE

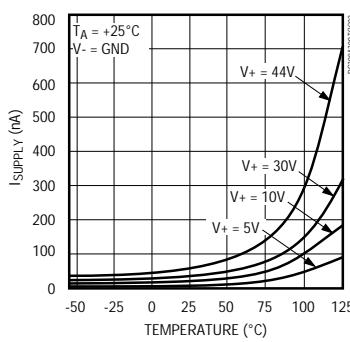

LEAKAGE CURRENTS vs.
ANALOG VOLTAGE

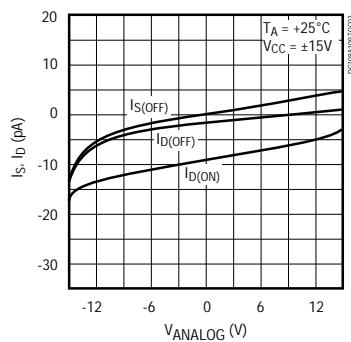

Pin Description

PIN	NAME	FUNCTION
1, 8, 9, 16	IN1-IN4	Logic Control Inputs
2, 7, 10, 15	D1-D4	Drain Output
3, 6, 11, 14	S1-S4	Source Input
4	V-	Negative Supply Voltage Input
5	GND	Ground
12	N.C.	No Connect. Not internally connected.
13	V+	Positive Supply Voltage Input. Connected to substrate.

Maxim cannot assume responsibility for use of any circuitry other than circuitry entirely embodied in a Maxim product. No circuit patent licenses are implied. Maxim reserves the right to change the circuitry and specifications without notice at any time.

Applications Information

The DG308A/DG309 switch positive analog signals while using a single positive supply, allowing use in applications where only one supply is available. The disadvantages of using a single supply are slower switching speed and increased $r_{DS(ON)}$. The Power-Supply Current and Voltage vs. Temperature graph shows the typical curve for a single-supply design. As stated in the Absolute Maximum Ratings, the analog voltage should not go above or below the supply voltages, which are V_+ and 0V in single-supply operation.