

NPN SILICON TRANSISTOR

NE685M03

FEATURES

- NEW M03 PACKAGE:
 - · Smallest transistor outline package available
 - Low profile/0.59 mm package height
 - · Flat lead style for better RF performance
- HIGH GAIN BANDWIDTH PRODUCT:

fT = 12 GHz

· LOW NOISE FIGURE:


NF = 1.5 dB at 2 GHz

DESCRIPTION

The NEC's NE685M03 transistor is designed for low noise, high gain, and low cost requirements. This high fT part is well suited for very low voltage/low current designs for portable wireless communications and cellular radio applications. NEC's new low profile/flat lead style "M03" package is ideal for today's portable wireless applications. The NE685 is also available in six different low cost plastic surface mount package styles.

OUTLINE DIMENSIONS (Units in mm)

PACKAGE OUTLINE M03





PIN CONNECTIONS

- 1. Emitter
- 2. Base
- 3. Collector

ELECTRICAL CHARACTERISTICS (TA = 25°C)

PART NUMBER EIAJ¹ REGISTERED NUMBER PACKAGE OUTLINE			NE685M03 2SC5435 M03			
SYMBOLS	PARAMETERS AND CONDITIONS	UNITS	MIN	TYP	MAX	
fτ	Gain Bandwidth at VcE = 3 V, Ic = 10 mA, f = 2 GHz	GHz		12		
NF	Noise Figure at VcE = 3 V, Ic = 3 mA, f = 2 GHz	dB		1.5	2.5	
IS ₂₁ EI ²	Insertion Power Gain at VcE = 3 V, Ic = 10 mA, f = 2 GHz	dB	7	9		
hFE ²	Forward Current Gain at VCE = 3 V, IC = 10 mA		75		140	
Ісво	Collector Cutoff Current at VcB = 5 V, IE = 0	μА			0.1	
ІЕВО	Emitter Cutoff Current at VEB = 1 V, IC = 0	μΑ			0.1	
CRE ³	Feedback Capacitance at VcB = 3 V, IE = 0, f = 1 MHz	pF		0.4	0.7	

Notes:

- 1. Electronic Industrial Association of Japan.
- 2. Pulsed measurement, pulse width \leq 350 µs, duty cycle \leq 2 %.
- 3. Capacitance is measured with emitter and case connected to the guard terminal at the bridge.


ABSOLUTE MAXIMUM RATINGS¹ (TA = 25°C)


SYMBOLS	PARAMETERS	UNITS	RATINGS
Vсво	Collector to Base Voltage	V	9
VCEO	Collector to Emitter Voltage	V	5
VEBO	Emitter to Base Voltage	V	2
Ic	Collector Current	mA	30
Рт	Total Power Dissipation	mW	125
TJ	Junction Temperature	°C	150
Тѕтс	Storage Temperature	°C	-65 to +150

Note:

 Operation in excess of any one of these parameters may result in permanent damage.

TYPICAL PERFORMANCE CURVES (TA = 25°C)






ORDERING INFORMATION

PART NUMBER	QUANTITY
NE685M03-A	
NE685M03-T1-A	

SCHEMATIC

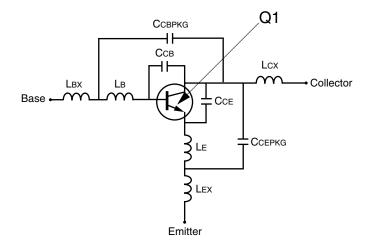

BJT NONLINEAR MODEL PARAMETERS (1)

Dovemetere	01	Darametera	01
Parameters	Q1	Parameters	Q1
IS	8.98e-17	MJC	0.19
BF	107.1	XCJC	0
NF	0.99	CJS	0
VAF	22	VJS	0.75
IKF	0.55	MJS	0
ISE	1e-6	FC	0.5
NE	31.10	TF	4e-12
BR	16.06	XTF	12
NR	0.98	VTF	1
VAR	6	ITF	0.04
IKR	8.02e-3	PTF	120
ISC	0	TR	1e-9
NC	2	EG	1.11
RE	0.6	XTB	0
RB	10	XTI	3
RBM	8.34	KF	0
IRB	0.009	AF	1
RC	5.07		
CJE	0.50e-12		
VJE	0.95		
MJE	0.5		
CJC	0.11e-12		
VJC	0.56		

(1) Gummel-Poon Model

UNITS

Parameter	Units
time	seconds
capacitance	farads
inductance	henries
resistance	ohms
voltage	volts
current	amps

ADDITIONAL PARAMETERS

Parameters	68533
Ссв	0.13e-12
CCE	0.14e-12
LB	0.3e-9
LE	0.8e-9
Ссврка	0.08e-12
Ссерка	0.08e-12
LBX	0.12e-9
Lcx	0.10e-9
LEX	0.12e-9

MODEL RANGE

Frequency: 0.1 to 4.0 GHz

Bias: VCE = 0.5 V to 3 V, IC = 0.5 mA to 20 mA

Date: 11/98

Life Support Applications

These NEC products are not intended for use in life support devices, appliances, or systems where the malfunction of these products can reasonably be expected to result in personal injury. The customers of CEL using or selling these products for use in such applications do so at their own risk and agree to fully indemnify CEL for all damages resulting from such improper use or sale.

EXCLUSIVE NORTH AMERICAN AGENT FOR **NEC** RF, MICROWAVE & OPTOELECTRONIC SEMICONDUCTORS



4590 Patrick Henry Drive Santa Clara, CA 95054-1817 Telephone: (408) 919-2500 Facsimile: (408) 988-0279

Subject: Compliance with EU Directives

CEL certifies, to its knowledge, that semiconductor and laser products detailed below are compliant with the requirements of European Union (EU) Directive 2002/95/EC Restriction on Use of Hazardous Substances in electrical and electronic equipment (RoHS) and the requirements of EU Directive 2003/11/EC Restriction on Penta and Octa BDE.

CEL Pb-free products have the same base part number with a suffix added. The suffix –A indicates that the device is Pb-free. The –AZ suffix is used to designate devices containing Pb which are exempted from the requirement of RoHS directive (*). In all cases the devices have Pb-free terminals. All devices with these suffixes meet the requirements of the RoHS directive.

This status is based on CEL's understanding of the EU Directives and knowledge of the materials that go into its products as of the date of disclosure of this information.

Restricted Substance per RoHS	Concentration Limit per RoHS (values are not yet fixed)		Concentration contained in CEL devices	
Lead (Pb)	< 1000 PPM	-A Not Detected	-AZ (*)	
Mercury	< 1000 PPM	Not Detected		
Cadmium	< 100 PPM	Not Detected		
Hexavalent Chromium	< 1000 PPM	Not Detected		
PBB	< 1000 PPM	Not Detected		
PBDE	< 1000 PPM	Not Detected		

If you should have any additional questions regarding our devices and compliance to environmental standards, please do not hesitate to contact your local representative.

Important Information and Disclaimer: Information provided by CEL on its website or in other communications concerting the substance content of its products represents knowledge and belief as of the date that it is provided. CEL bases its knowledge and belief on information provided by third parties and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. CEL has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. CEL and CEL suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall CEL's liability arising out of such information exceed the total purchase price of the CEL part(s) at issue sold by CEL to customer on an annual basis.

See CEL Terms and Conditions for additional clarification of warranties and liability.