Schottky barrier diode RB201A60

Applications

General rectification


● Features

- 1) Cylindrical mold type.(MSR)
- 2) Low V_F .
- 3) High ESD.


Construction

Silicon epitaxial planar

• Dimensions (Unit: mm)

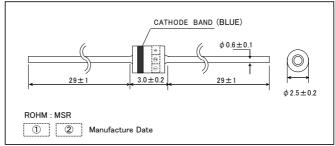

• Taping specifications (Unit : mm)

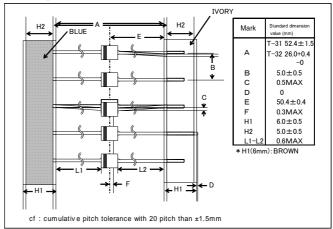

● Absolute maximum ratings (Ta=25°C)

Parameter	Symbol	Limits	Unit
Reverse voltage (repetitive peak)	V_{RM}	60	V
Reverse voltage (DC)	V_R	60	V
Average rectified forward current (*1)	lo	2	Α
Forward current surge peak (60Hz-1cyc)	I _{FSM}	40	Α
Junction temperature	Tj	150	°C
Storage temperature	Tstg	-55 to +150	°C


^(*1) Mounted on epoxy board. 180°Half sine wave

●Electrical characteristics (Ta=25°C)

Parameter	Symbol	Min.	Typ.	Max.	Unit	Conditions
1 dramotor	Syllibol	IVIII I.	τyp.	ivian.	Offic	Conditions
Forward voltage	V_{F}	-	-	0.58	V	I _F =2.0A
Reverse current	I_R	-	-	100	μA	$V_R=60V$

●Electrical characteristic curves (Ta=25°C) 100000 1000 FORWARD CURRENT:IF(mA) 1 000 0001 CAPACITANCE BETWEEN TERMINALS:Ct(pF) REVERSE CURRENT:IR(uA) 100 10 0.1 0.1 0.01 0 10 15 20 25 200 300 400 500 15 0 600 0 10 20 FORWARD VOLTAGE: VF(mV) REVERSE VOLTAGE:VR(V) VR-Ct CHARACTERISTICS REVERSE VOLTAGE: VR(V) VF-IF CHARACTERISTICS VR-IR CHARACTERISTICS Ta=25°C VR=60V 360 FORWARD VOLTAGE:VF(mV) 80 REVERSE CURRENT:IR(uA) n=30pcs CAPACITANCE BETWEEN JACITANCE TERMINALS:Ct(pF) 70 60 50 530 30 20 520 220 200 VF DISPERSION MAP Ct DISPERSION MAP IR DISPERSION MAP Ta=25°C IF=0.5A 90 RESERVE RECOVERY TIME:trr(ns) PEAK SURGE FORWARD CURRENT:IFSM(A) PEAK SURGE FORWARD CURRENT:IFSM(A) 80 IR=1A r=0.25*IF 70 8.3ms 8.3ms 60 40 100 30 20 10 10 NUMBER OF CYCLES IFSM-CYCLE CHARACTERISTICS IFSM DISPERSION MAP trr DISPERSION MAP Mounted on epoxy board 150 10000 IF=0.5A PEAK SURGE FORWARD CURRENT:IFSM(A) THAERMAL IMPEDANCE:Rth (%) 100 FORWARD POWER DISSIPATION:Pf(W) $Sin(\theta = 180)$ TRANSIENT 10 TIME:t(ms) IFSM-t CHARACTERISTICS 100 0.001 0.01 100 1000 0 AVERAGE RECTIFIED FORWARD CURRENT: Io(A) Io-Pf CHARACTERISTICS TIME:t(s) Rth-t CHARACTERISTICS

ESD DISPERSION MAP

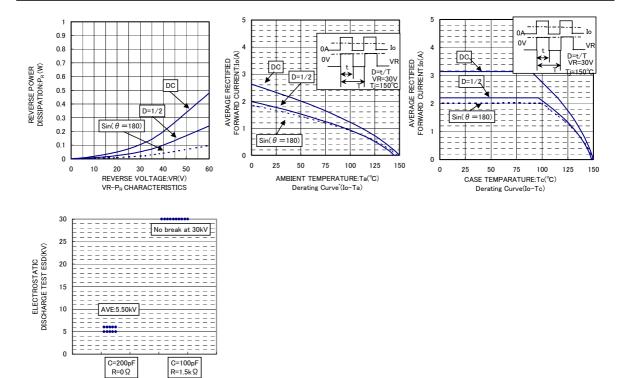

Notes

- No technical content pages of this document may be reproduced in any form or transmitted by any
 means without prior permission of ROHM CO.,LTD.
- The contents described herein are subject to change without notice. The specifications for the
 product described in this document are for reference only. Upon actual use, therefore, please request
 that specifications to be separately delivered.
- Application circuit diagrams and circuit constants contained herein are shown as examples of standard
 use and operation. Please pay careful attention to the peripheral conditions when designing circuits
 and deciding upon circuit constants in the set.
- Any data, including, but not limited to application circuit diagrams information, described herein are intended only as illustrations of such devices and not as the specifications for such devices. ROHM CO.,LTD. disclaims any warranty that any use of such devices shall be free from infringement of any third party's intellectual property rights or other proprietary rights, and further, assumes no liability of whatsoever nature in the event of any such infringement, or arising from or connected with or related to the use of such devices.
- Upon the sale of any such devices, other than for buyer's right to use such devices itself, resell or
 otherwise dispose of the same, no express or implied right or license to practice or commercially
 exploit any intellectual property rights or other proprietary rights owned or controlled by
- ROHM CO., LTD. is granted to any such buyer.
- Products listed in this document are no antiradiation design.

The products listed in this document are designed to be used with ordinary electronic equipment or devices (such as audio visual equipment, office-automation equipment, communications devices, electrical appliances and electronic toys).

Should you intend to use these products with equipment or devices which require an extremely high level of reliability and the malfunction of which would directly endanger human life (such as medical instruments, transportation equipment, aerospace machinery, nuclear-reactor controllers, fuel controllers and other safety devices), please be sure to consult with our sales representative in advance.

It is our top priority to supply products with the utmost quality and reliability. However, there is always a chance of failure due to unexpected factors. Therefore, please take into account the derating characteristics and allow for sufficient safety features, such as extra margin, anti-flammability, and fail-safe measures when designing in order to prevent possible accidents that may result in bodily harm or fire caused by component failure. ROHM cannot be held responsible for any damages arising from the use of the products under conditions out of the range of the specifications or due to non-compliance with the NOTES specified in this catalog.

Thank you for your accessing to ROHM product informations.

More detail product informations and catalogs are available, please contact your nearest sales office.

ROHM Customer Support System

THE AMERICAS / EUROPE / ASIA / JAPAN

www.rohm.com

Contact us : webmaster@rohm.co.jp

Copyright © 2008 ROHM CO.,LTD.

ROHM CO., LTD. 21 Saiin Mizosaki-cho, Ukyo-ku, Kyoto 615-8585, Japan

an TEL:+81-75-311-2121 FAX:+81-75-315-0172

