

Micro Commercial Components 20736 Marilla Street Chatsworth

(818) 701-4939

CA 91311 Phone: (818) 701-4933

Fax:

# 20 Amp High Voltage Power Schottky Barrier Rectifier 120 Volts

MBR20120FCT

### **Features**

- High Junction Temperature Capability
- Low Forward Voltage
- Marking: type number
- Lead Free Finish/RoHS Compliant(Note 1) ("P" Suffix designates RoHS Compliant. See ordering information)
- Case Material: Molded Plastic. UL Flammability Classification Rating 94V-0 and MSL Rating 1

## **Maximum Ratings**

- Operating Junction Temperature: -50°C to +150°C
- Storage Temperature: -50°C to +150°C


MCC Catalog Number	Maximum Recurrent Peak Reverse	Maximum RMS Voltage	Maximum DC Blocking
	Voltage		Voltage
MBR20120FCT	120V	84V	120V

### Electrical Characteristics @ 25°C Unless Otherwise Specified

Average Forward Current	I <sub>F(AV)</sub>	20 A	T <sub>C</sub> = 120°C
Peak Forward Surge Current	I <sub>FSM</sub>	150A	8.3ms, half sine
Maximum Instantaneous Forward Voltage	$V_{F}$	.83V	I <sub>F</sub> = 10A; T <sub>J</sub> = 25°C
Maximum DC Reverse Current At Rated DC Blocking Voltage	I <sub>R</sub>	0.5mA	T <sub>J</sub> = 25°C

Notes:1.High Temperature Solder Exemption Applied, see EU Directive Annex 7.

## **ITO-220AB**

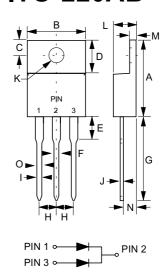


DIMENSIONS					
	INCHES		ММ		
DIM	MIN	MAX	MIN	MAX	NOTE
Α	.583	.642	14.80	16.30	
В		.406		10.30	
С	.100	.112	2.55	2.85	
D	.248	.272	6.30	6.90	
Е		.161		4.10	
F		.071		1.80	
G	.512	.543	13.00	13.80	
Н	.100		2.55		
-		.035		0.90	
J		.032		0.80	
K	.118	.134	3.00	3.40	Ø
٦		.189		4.80	
M		.130		3.30	
N	.098	.114	2.50	2.90	
0		.055		1.40	




### MBR20120FCT

Figure 1
Typical Forward Characteristics

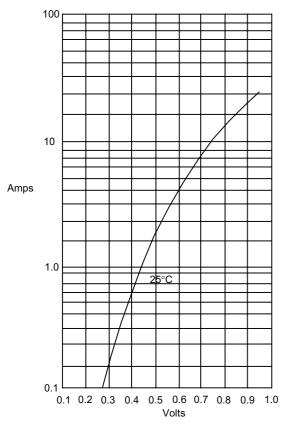


Instantaneous Forward Current - Amperes*versus* Instantaneous Forward Voltage - Volts

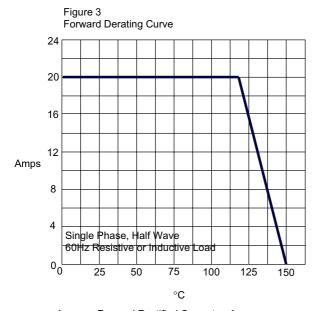


Average Forward Rectified Current - Amperes/ersus Case Temperature -  $^{\circ}$ C

Figure 2 **Micro Commercial Components** Typical Reverse Characteristics

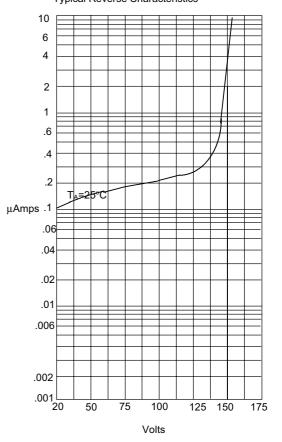

Instantaneous Reverse Leakage Current - MicroAmperesversus Percent Of Rated Peak Reverse Voltage - Volts

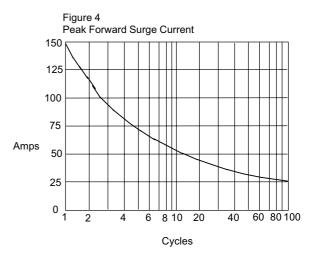

Peak Forward Surge Current - Amperesversus Number Of Cycles At 60Hz - Cycles



### **Ordering Information**

Device	Packing
(Part Number)-BP	Bulk;1Kpcs/Box

#### \*\*\*IMPORTANT NOTICE\*\*\*

Micro Commercial Components Corp. reserves the right to make changes without further notice to any product herein to make corrections, modifications, enhancements, improvements, or other changes.
Micro Commercial Components Corp. does not assume any liability arising out of the application or use of any product described herein; neither does it convey any license under its patent rights, nor the rights of others. The user of products in such applications shall assume all risks of such use and will agree to hold Micro Commercial Components Corp. and all the companies whose products are represented on our website, harmless against all damages.

#### \*\*\*APPLICATIONS DISCLAIMER\*\*\*

Products offer by *Micro Commercial Components Corp* . are not intended for use in Medical,

Aerospace or Military Applications.