



#### **DUAL SCHMITT TRIGGER BUFFERS**

### **Description**

The DIODES™ 74LVC2G17 is a dual Schmitt trigger buffer gate with standard push-pull outputs. The device is designed for operation with a power supply range of 1.65V to 5.5V. The inputs are tolerant to 5.5V allowing this device to be used in a mixed voltage environment. The device is fully specified for partial power down applications using IOFF. The IOFF circuitry disables the output preventing damaging current backflow when the device is powered down.


The gate performs the positive Boolean function:

Y = A

#### **Features**

- Wide Supply Voltage Range from 1.65V to 5.5V
- ±24mA Output Drive at 3.0V
- CMOS Low Power Consumption
- I<sub>OFF</sub> Supports Partial-Power-Down Mode Operation
- Inputs Accept up to 5.5V
- ESD Protection Tested per JESD 22
- Exceeds 2000V Human Body Model (A114)
- Exceeds 1000V Charged Device Model (C101)
- Latch-up Exceeds 100mA per JESD 78, Class I
- X2-DFN1409-6 Package Designed as a Direct Replacement for Chip Scale Packaging
- Range of Package Options SOT26, SOT363,
   X1-DFN1010-6 (Type B), X2-DFN1010-6, X2-DFN1409-6, and
   X2-DFN1410-6
- Leadless Packages Named per JESD30E
- Totally Lead-Free & Fully RoHS Compliant (Notes 1 & 2)
- Halogen and Antimony Free. "Green" Device (Note 3)
- For automotive applications requiring specific change control (i.e. parts qualified to AEC-Q100/101/104/200, PPAP capable, and manufactured in IATF 16949 certified facilities), please <u>contact us</u> or your local Diodes representative. <a href="https://www.diodes.com/quality/product-definitions/">https://www.diodes.com/quality/product-definitions/</a>

### **Pin Assignments**

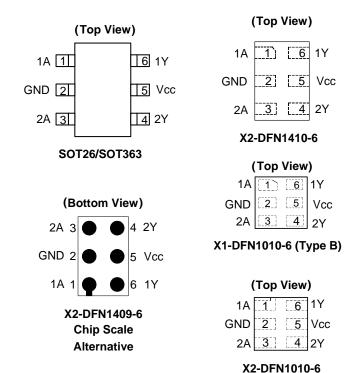

### **Applications**

- Voltage level shifting
- General purpose logics
- Power down signal isolations
- Wide array of products such as:
  - PCs, networking, notebooks, netbooks, tablets
  - Computer peripherals, hard drives, SSD, CD/DVD ROM
  - TV, DVD, DVR, set-top boxes
  - Cell phones, personal navigations/GPS
  - MP3 players, cameras, video recorders

Notes:

- 1. No purposely added lead. Fully EU Directive 2002/95/EC (RoHS), 2011/65/EU (RoHS 2) & 2015/863/EU (RoHS 3) compliant.
- 2. See https://www.diodes.com/quality/lead-free/ for more information about Diodes Incorporated's definitions of Halogen- and Antimony-free, "Green" and Lead-free.
- 3. Halogen- and Antimony-free "Green" products are defined as those which contain <900ppm bromine, <900ppm chlorine (<1500ppm total Br + Cl) and <1000ppm antimony compounds.


74LVC2G17 Document number: DS35164 Rev: 11 - 2



### **Pin Descriptions**

Pin Name	Pin Number	Function
1A	1	Data Input
GND	2	Ground
2A	3	Data Input
2Y	4	Data Output
Vcc	5	Supply Voltage
1Y	6	Data Output

## **Logic Diagram**



## **Function Table**

Inputs	Output				
Α	Y				
Н	Н				
L	L				

### Absolute Maximum Ratings (Notes 4 & 5) (@TA = +25°C, unless otherwise specified.)

Symbol	Parameter	Rating	Unit
ESD HBM	Human Body Model ESD Protection	2	kV
ESD CDM	Charged Device Model ESD Protection	1	kV
Vcc	Supply Voltage Range	-0.5 to +6.5	V
Vı	Input Voltage Range	-0.5 to +6.5	V
Vo	Voltage Applied to Output in High Impedance or IOFF State	-0.5 to +6.5	V
Vo	Voltage Applied to Output in High or Low State	-0.3 to Vcc +0.5	V
I <sub>IK</sub>	Input Clamp Current V <sub>I</sub> < 0	-50	mA
Іок	Output Clamp Current Vo < 0	-50	mA
lo	Continuous Output Current	-50	mA
_	Continuous Current Through V <sub>DD</sub> or GND	±100	mA
TJ	Operating Junction Temperature	-40 to +150	°C
Tstg	Storage Temperature	-65 to +150	°C

Note:

- Stresses greater than those listed under *Absolute Maximum Ratings* can cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated under *Recommended Operating Conditions* is not implied. Exposure to *Absolute Maximum Ratings* for extended periods can affect device reliability.
   Forcing the maximum allowed voltage could cause a condition exceeding the maximum current or conversely forcing the maximum current could cause a condition exceeding the maximum woltage. The ratings of both current and voltage must be maintained within the controlled range.



# Recommended Operating Conditions (Note 6) (@TA = +25°C, unless otherwise specified.)

Symbol		Parameter	Min	Max	Unit	
\/	Operating Voltage	Operating	1.65	5.5	V	
Vcc	Operating Voltage	Data Retention Only	1.5	_	V	
Vı	Input Voltage		0	5.5	V	
Vo	Output Voltage		0	Vcc	V	
		Vcc = 1.65V	_	-4		
	Iон High-Level Output Current	$V_{CC} = 2.3V$	_	-8		
Іон		Vcc = 3V	_	-16	mA	
		VCC = 3V	_	-24		
		V <sub>CC</sub> = 4.5V	_	-32		
		Vcc = 1.65V	_	4		
		Vcc = 2.3V	_	8		
loL	Low-Level Output Current	$V_{CC} = 3V$	_	16	mA	
		VCC = 3V	_	24		
		Vcc = 4.5V	_	32		
		$Vcc = 1.8V \pm 0.15V, 2.5V \pm 0.2V$	_	20		
$\Delta t/\Delta V$	Input Transition Rise or Fall Rate	$V_{CC} = 3.3V \pm 0.3V$	_	10	ns/V	
		$V_{CC} = 5V \pm 0.5V$	_	5		
TA	Operating Free-Air Temperature	_	-40	+125	°C	

Note:

6. Unused inputs should be held at  $V_{\text{CC}}$  or Ground.



# Electrical Characteristics (@T<sub>A</sub> = +25°C, unless otherwise specified.)

Cumbal	Parameter	Test Conditions	v	-40°C to	+85°C	-40°C to	+125°C	Unit
Symbol	Parameter	rest Conditions	V <sub>CC</sub>	Min	Max	Min	Max	Unit
			1.8V	0.70	1.50	0.70	1.70	
			2.3V	1.00	1.80	1.00	2.00	
V <sub>T+</sub>	Positive-Going Input Threshold Voltage	_	3V	1.30	2.20	1.30	2.40	V
	Threshold voltage		4.5V	1.90	3.10	1.90	3.30	
			5.5V	2.20	3.60	2.20	3.80	
			1.8V	0.25	0.90	0.25	1.10	
			2.3V	0.40	1.15	0.4	1.35	
$V_{T-}$	Negative-Going Input Threshold Voltage	_	3V	0.60	1.50	0.6	1.7	V
	Threshold Voltage		4.5V	1.00	2.00	1	2.2	
			5.5V	1.20	2.30	1.2	2.5	
			1.8V	0.15	1.00	0.15	1.2	
	ΔVτ Hysteresis (Vτ+ - Vτ-)		2.3V	0.25	1.10	0.25	1.3	
$\Delta VT$		_	3V	0.40	1.20	0.40	1.40	V
			4.5V	0.60	1.50	0.60	1.70	
			5.5V	0.70	1.70	0.70	1.90	
		I <sub>OH</sub> = -100μA	1.65V to 5.5V	V <sub>CC</sub> - 0.1	_	V <sub>CC</sub> - 0.1	_	
		$I_{OH} = -4mA$	1.65V	1.2	ı	0.95		
Mari	High-Level Output Voltage	Iон = -8mA	2.3V	1.9	ı	1.7		V
Vон	High-Level Output voltage	$I_{OH} = -16mA$	3V	2.4	1	2.2	1	V
		I <sub>OH</sub> = -24mA	3 V	2.3		2.0		
		I <sub>OH</sub> = -32mA	4.5V	3.8	ı	3.4		
		$I_{OL} = 100 \mu A$	1.65V to 5.5V	_	0.1	_	0.10	
		$I_{OL} = 4mA$	1.65V	_	0.45	_	0.70	
Vol	Low-Level Output Voltage	$I_{OL} = 8mA$	2.3V	_	0.3	_	0.45	V
VOL	Low-Level Output Voltage	IoL = 16mA	3V	_	0.4	_	0.60	V
		$I_{OL} = 24mA$	3 v	_	0.55	_	0.80	
		IoL = 32mA	4.5V	_	0.55	_	0.80	
lı	Input Current	V <sub>I</sub> = 5.5V or GND	0 to 5.5V	_	± 5	_	± 20	μA
loff	Power Down Leakage Current	V <sub>I</sub> or V <sub>O</sub> = 5.5V	0	_	± 10	_	± 20	μΑ
Icc	Supply Current	$V_1 = 5.5V$ or GND, $I_0 = 0$	1.65V to 5.5V	_	10	_	40	μA



# Package Characteristics ( $@T_A = +25^{\circ}C$ , $V_{CC} = 3.3V$ , unless otherwise specified.)

Symbol	Parameter	Package	Conditions	Min	Тур	Max	Unit
Cı	Input Capacitance	Typical of all packages	$V_{CC} = 3.3V$ $V_{I} = V_{CC}$ or GND	_	3.5	_	pF
		SOT26		_	204	_	
		SOT363		_	371	_	
0	θ <sub>JA</sub> Thermal Resistance Junction-to- Ambient	X2-DFN1410-6	(Nata 7)	_	430	_	°C/W
ÐJA		X2-DFN1409-6	(Note 7)	_	450	_	
		X1-DFN1010-6 (Type B)		_	495	_	
		X2-DFN1010-6		_	510	_	
		SOT26		_	52	_	
		SOT363		_	143	_	
0	Thermal Resistance Junction-to-	X2-DFN1410-6	(NI=4= 7)	_	190	_	0000
θις	Case	X2-DFN1409-6	(Note 7)		225	_	°C/W
		X1-DFN1010-6 (Type B)	1	_	245	_	
		X2-DFN1010-6	1	_	250	_	

Note:

### **Switching Characteristics**

 $T_A = -40$ °C to +85°C,  $C_L = 30$ pF or 50pF (See Figure 1)

Parameter	From (Input)	-		= 1.8V .15V		= 2.5V ).2V	V <sub>CC</sub> = ± 0	: 3.3V :3V	V <sub>CC</sub>	= 5V .5V	Unit
	(input)	(Output)	Min	Max	Min	Max	Min	Max	Min	Max	
tpD	А	Y	0.5	10.5	0.5	6.5	0.5	5.7	0.5	4.3	ns

 $T_A = -40$ °C to +125°C,  $C_L = 30$ pF or 50pF (See Figure 1)

Parameter	From	rom To nput) (Output)		= 1.8V .15V		= 2.5V ).2V		: 3.3V :3V		= 5V ).5V	Unit
	(input)		Min	Max	Min	Max	Min	Max	Min	Max	
tpD	А	Y	0.5	13.1	0.5	8.5	0.5	7.1	0.5	5.4	ns

# **Operating Characteristics**


#### $T_A = +25^{\circ}C$

	Parameter		V <sub>CC</sub> = 1.8V	V <sub>CC</sub> = 2.5V	$V_{CC} = 3.3V$	V <sub>CC</sub> = 5V	Unit	
	Farailletei	Conditions	Тур	Тур	Тур	Тур	Oilit	
CPD	Power Dissipation Capacitance	f = 10MHz	17	19	20	21	pF	

<sup>7.</sup> Test condition for all packages: Device mounted on FR-4 substrate PC board, 2oz copper with minimum recommended pad layout.



## **Parameter Measurement Information**



Vcc	Inp	outs	VM	C.	RL	
VCC	Vı	t <sub>R</sub> /t <sub>F</sub>	VM	C∟	NL NL	
1.8V ± 0.15V	Vcc	≤ 2ns	Vcc/2	30pF	1kΩ	
$2.5V \pm 0.2V$	Vcc	≤ 2ns	Vcc/2	30pF	500Ω	
$3.3V \pm 0.3V$	3V	≤ 2.5ns	1.5V	50pF	500Ω	
5V ± 0.5V	Vcc	≤ 2.5ns	Vcc/2	50pF	500Ω	

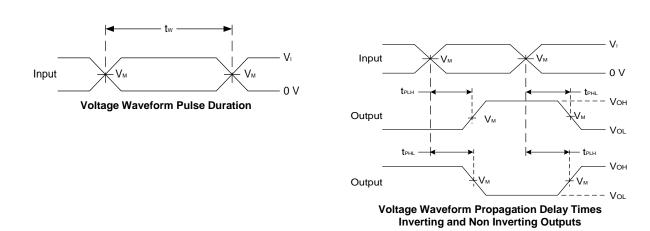



Figure 1 Load Circuit and Voltage Waveforms

Notes:

- A. Includes test lead and test apparatus capacitance.
  B. All pulses are supplied at pulse repetition rate ≤ 10MHz.
- C. Inputs are measured separately one transition per measurement.
- D.  $t_{PLH}$  and  $t_{PHL}$  are the same as  $t_{PD}$ .



# **Ordering Information**



74 : Logic Prefix LVC : 1.65V to 5.5V

Logic Family 2G: Two Gates

17 : Buffer/Driver with Schmitt Trigger Inputs

W6: SOT26 DW: SOT363

FW5: X1-DFN1010-6 (Type B)


FW4: X2-DFN1010-6 FX4: X2-DFN1409-6 FZ4: X2-DFN1410-6

Part Number	Part Number	Package	Dookses (Note 9)	Doolsono Cino	Packing	Packing (Note 9)		
Part Number	Suffix	Code	Package (Note 8)	Package Size	Qty.	Carrier		
74LVC2G17W6-7	-7	W6	SOT26	2.8mm x 2.2mm x 1.1mm 0.95mm Lead Pitch	3000	Tape & Reel		
74LVC2G17DW-7	-7	DW	SOT363	2.0mm x 2.0mm x 1.1mm 0.65mm Lead Pitch	3000	Tape & Reel		
74LVC2G17FW5-7	-7	FW5	X1-DFN1010-6 (Type B)	1.0mm x 1.0mm x 0.5mm 0.35mm Pad Pitch	5000	Tape & Reel		
74LVC2G17FW4-7	-7	FW4	X2-DFN1010-6	1.0mm x 1.0mm x 0.4mm 0.35mm Pad Pitch	5000	Tape & Reel		
74LVC2G17FX4-7	-7	FX4	X2-DFN1409-6 Chip Scale Alternative	1.4mm x 0.9mm x 0.4mm 0.5mm Pad Pitch	5000	Tape & Reel		
74LVC2G17FZ4-7	-7	FZ4	X2-DFN1410-6	1.4mm x 1.0mm x 0.4mm 0.5mm Pad Pitch	5000	Tape & Reel		

Notes: 8. Pad layout as shown on Diodes Incorporated's website at http://www.diodes.com/package-outlines.html.

## **Marking Information**

#### (1) SOT26, SOT363



XX: Identification Code

 $\underline{Y}$ : Year 0 to 9 (ex: 2 = 2022)

W: Week: A to Z: Week 1 to 26;

a to z: Week 27 to 52; z Represents

Week 52 and 53

X: A to Z: Internal Code

Part Number	Package	Identification Code
74LVC2G17W6-7	SOT26	Z6
74LVC2G17DW-7	SOT363	Z6

<sup>9.</sup> The taping orientation is located on our website at https://www.diodes.com/assets/Packaging-Support-Docs/ap02007.pdf.



# Marking Information (continued)

### (2) X1-DFN1010-6 (Type B), X2-DFN1010-6, X2-DFN1409-6, X2-DFN1410-6

(Top View)

<u>XX</u> • <u>Y W X</u>  $\underline{XX}$ : Identification Code  $\underline{Y}$ : Year 0 to 9 (ex: 2 = 2022)  $\underline{W}$ : Week: A to Z: Week 1 to 26;

a to z: Week 27 to 52; z Represents

Week 52 and 53 X: A to Z: Internal Code


Part Number	Package	Identification Code
74LVC2G17FW4-7	X2-DFN1010-6	Z6
74LVC2G17FW5-7	X1-DFN1010-6 (Type B)	W6
74LVC2G17FX4-7	X2-DFN1409-6	X6
74LVC2G17FZ4-7	X2-DFN1410-6	Z6



# Package Outline Dimensions


Please see http://www.diodes.com/package-outlines.html for the latest version.


#### SOT26

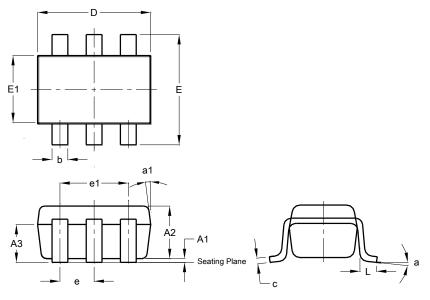

SOT26			
Dim	Min	Max	Тур
A1	0.013	0.10	0.05
A2	1.00	1.30	1.10
А3	0.70	0.80	0.75
b	0.35	0.50	0.38
С	0.10	0.20	0.15
D	2.90	3.10	3.00
е	-	-	0.95
e1	-	-	1.90
Е	2.70	3.00	2.80
E1	1.50	1.70	1.60
L	0.35	0.55	0.40
а	-	-	8°
a1	-	-	7°
All	All Dimensions in mm		

SOT363



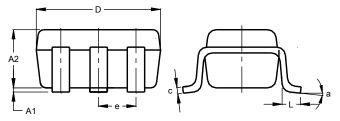


SOT363			
Dim	Min	Max	Тур
A1	0.00	0.10	0.05
A2	0.90	1.00	0.95
b	0.10	0.30	0.25
С	0.10	0.22	0.11
D	1.80	2.20	2.15
Е	2.00	2.20	2.10
E1	1.15	1.35	1.30
е	e 0.650 BSC		
F	0.40	0.45	0.425
L	0.25	0.40	0.30
а	0°	8°	
All Dimensions in mm			



# Package Outline Dimensions (continued)


Please see http://www.diodes.com/package-outlines.html for the latest version.


#### X1-DFN1010-6 (Type B)

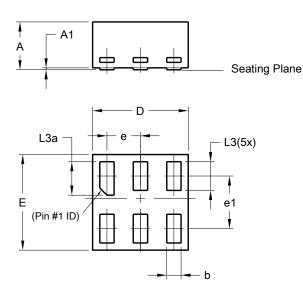

	X1-DFN1010-6			
Dim	(Type B)  Dim   Min   Max   Typ			
Α	_	0.50	0.39	
A1	_	0.04	-	
b	0.12	0.20	0.15	
D	0.95	1.050	1.00	
Е	0.95	1.050	1.00	
е	e 0.35 BSC			
e1	0.55 BSC			
L3	0.27	0.30	0.30	
L3a	0.32	0.40	0.35	
All Dimensions in mm				

#### X2-DFN1010-6






X2-DFN1010-6				
Dim	Min	Max	Тур	
Α	_	0.40	0.39	
A1	0.00	0.05	0.02	
А3	_	_	0.13	
b	0.14	0.20	0.17	
b1	0.05	0.15	0.10	
D	0.95	1.05	1.00	
Е	0.95	1.05	1.00	
е	<b>e</b> — — 0.35			
L	0.35	0.45	0.40	
K	0.15		_	
Z	_	_	0.065	
All Dimensions in mm				



# Package Outline Dimensions (continued)


Please see http://www.diodes.com/package-outlines.html for the latest version.

#### X2-DFN1409-6

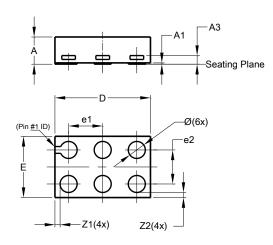

	X2-DFN1409-6				
Dim	Dim Min Max Typ				
Α	-	0.40	0.39		
A1	0	0.05	0.02		
A3	-	-	0.13		
Ø	0.20	0.30	0.25		
D	1.35	1.45	1.40		
Е	0.85	0.95	0.90		
e1	-	-	0.50		
e2	-	-	0.50		
<b>Z</b> 1	-	-	0.075		
Z2	-	-	0.075		
All Dimensions in mm					

#### X2-DFN1410-6

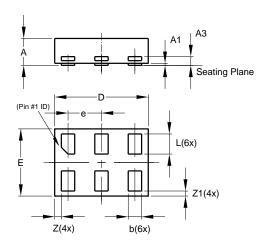


X2-DFN1410-6			
Dim	Min	Max	Тур
Α		0.40	0.39
A1	0.00	0.05	0.02
A3			0.13
b	0.15	0.25	0.20
D	1.35	1.45	1.40
Е	0.95	1.05	1.00
е			0.50
L	0.25	0.35	0.30
Z	_		0.10
Z1	0.045	0.105	0.075
All Dimensions in mm			



# Suggested Pad Layout


Please see http://www.diodes.com/package-outlines.html for the latest version.

#### SOT26




Dimensions	Value (in mm)
С	2.40
C1	0.95
G	1.60
Х	0.55
Y	0.80
Y1	3.20

#### **SOT363**



Dimensions	Value (in mm)
С	0.650
G	1.300
Х	0.420
Y	0.600
Y1	2.500

### X1-DFN1010-6 (Type B)




Dimensions	Value
Difficusions	(in mm)
С	0.350
G	0.150
G1	0.150
Х	0.200
X1	0.900
Υ	0.500
Y1	0.525
Y2	0.475
Y3	1.150



# Suggested Pad Layout (continued)


Please see http://www.diodes.com/package-outlines.html for the latest version.

#### X2-DFN1010-6

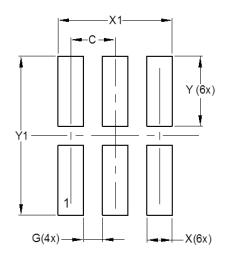


Dimensions	Value (in mm)
С	0.350
G	0.150
Х	0.200
X1	0.900
Y	0.550
Y1	1.250

#### X2-DFN1409-6



Dimensions	Value (in mm)
С	1.000
C1	0.500
D	0.300
G	0.200
G1	0.200
Х	0.400
Y	0.150

#### X2-DFN1410-6



Dimensions	Value (in mm)
С	0.500
G	0.250
X	0.250
X1	1.250
Υ	0.525
Y1	1.250



#### **Mechanical Data**

#### SOT26

- Moisture Sensitivity: Level 1 per J-STD-020
- Terminals: Finish Matte Tin Plated Leads, Solderable per MIL-STD-202, Method 208 @3
- Weight: 0.016 grams (Approximate)

#### **SOT363**

- Moisture Sensitivity: Level 1 per J-STD-020
- Terminals: Finish Matte Tin Plated Leads, Solderable per MIL-STD-202, Method 208 @3
- Weight: 0.006 grams (Approximate)

#### X1-DFN1010-6 (Type B)

- Moisture Sensitivity: Level 1 per J-STD-020
- Terminals: Finish NiPdAu Nickel Palladium Gold, Solderable per MIL-STD-202, Method 208 @
- Weight: 0.001 grams (Approximate)

#### X2-DFN1010-6

- Moisture Sensitivity: Level 1 per J-STD-020
- Terminals: Finish NiPdAu Nickel Palladium Gold, Solderable per MIL-STD-202, Method 208 @
- Weight: 0.001 grams (Approximate)

#### X2-DFN1409-6

- Moisture Sensitivity: Level 1 per J-STD-020
- Terminals: Finish NiPdAu Nickel Palladium Gold, Solderable per MIL-STD-202, Method 208 @
- Weight: 0.002 grams (Approximate)

#### X2-DFN1410-6

- Moisture Sensitivity: Level 1 per J-STD-020
- Terminals: Finish NiPdAu Nickel Palladium Gold, Solderable per MIL-STD-202, Method 208 @
- Weight: 0.002 grams (Approximate)



#### **IMPORTANT NOTICE**

- 1. DIODES INCORPORATED (Diodes) AND ITS SUBSIDIARIES MAKE NO WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, WITH REGARDS TO ANY INFORMATION CONTAINED IN THIS DOCUMENT, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR NON-INFRINGEMENT OF THIRD PARTY INTELLECTUAL PROPERTY RIGHTS (AND THEIR EQUIVALENTS UNDER THE LAWS OF ANY JURISDICTION).
- 2. The Information contained herein is for informational purpose only and is provided only to illustrate the operation of Diodes' products described herein and application examples. Diodes does not assume any liability arising out of the application or use of this document or any product described herein. This document is intended for skilled and technically trained engineering customers and users who design with Diodes' products. Diodes' products may be used to facilitate safety-related applications; however, in all instances customers and users are responsible for (a) selecting the appropriate Diodes products for their applications, (b) evaluating the suitability of Diodes' products for their intended applications, (c) ensuring their applications, which incorporate Diodes' products, comply the applicable legal and regulatory requirements as well as safety and functional-safety related standards, and (d) ensuring they design with appropriate safeguards (including testing, validation, quality control techniques, redundancy, malfunction prevention, and appropriate treatment for aging degradation) to minimize the risks associated with their applications.
- 3. Diodes assumes no liability for any application-related information, support, assistance or feedback that may be provided by Diodes from time to time. Any customer or user of this document or products described herein will assume all risks and liabilities associated with such use, and will hold Diodes and all companies whose products are represented herein or on Diodes' websites, harmless against all damages and liabilities.
- 4. Products described herein may be covered by one or more United States, international or foreign patents and pending patent applications. Product names and markings noted herein may also be covered by one or more United States, international or foreign trademarks and trademark applications. Diodes does not convey any license under any of its intellectual property rights or the rights of any third parties (including third parties whose products and services may be described in this document or on Diodes' website) under this document.
- 5. Diodes' products are provided subject to Diodes' Standard Terms and Conditions of Sale (<a href="https://www.diodes.com/about/company/terms-and-conditions/terms-and-conditions-of-sales/">https://www.diodes.com/about/company/terms-and-conditions/terms-and-conditions-of-sales/</a>) or other applicable terms. This document does not alter or expand the applicable warranties provided by Diodes. Diodes does not warrant or accept any liability whatsoever in respect of any products purchased through unauthorized sales channel.
- 6. Diodes' products and technology may not be used for or incorporated into any products or systems whose manufacture, use or sale is prohibited under any applicable laws and regulations. Should customers or users use Diodes' products in contravention of any applicable laws or regulations, or for any unintended or unauthorized application, customers and users will (a) be solely responsible for any damages, losses or penalties arising in connection therewith or as a result thereof, and (b) indemnify and hold Diodes and its representatives and agents harmless against any and all claims, damages, expenses, and attorney fees arising out of, directly or indirectly, any claim relating to any noncompliance with the applicable laws and regulations, as well as any unintended or unauthorized application.
- 7. While efforts have been made to ensure the information contained in this document is accurate, complete and current, it may contain technical inaccuracies, omissions and typographical errors. Diodes does not warrant that information contained in this document is error-free and Diodes is under no obligation to update or otherwise correct this information. Notwithstanding the foregoing, Diodes reserves the right to make modifications, enhancements, improvements, corrections or other changes without further notice to this document and any product described herein. This document is written in English but may be translated into multiple languages for reference. Only the English version of this document is the final and determinative format released by Diodes.
- 8. Any unauthorized copying, modification, distribution, transmission, display or other use of this document (or any portion hereof) is prohibited. Diodes assumes no responsibility for any losses incurred by the customers or users or any third parties arising from any such unauthorized use.
- 9. This Notice may be periodically updated with the most recent version available at <a href="https://www.diodes.com/about/company/terms-and-conditions/important-notice">https://www.diodes.com/about/company/terms-and-conditions/important-notice</a>

DIODES is a trademark of Diodes Incorporated in the United States and other countries. The Diodes logo is a registered trademark of Diodes Incorporated in the United States and other countries. © 2022 Diodes Incorporated. All Rights Reserved.

www.diodes.com

74LVC2G17 15 of 15 August 2022
Document number: DS35164 Rev: 11 - 2 www.diodes.com © 2022 Copyright Diodes Incorporated. All Rights Reserved.