# **SERIES 19** 2" Diameter, 15 Amp

# **FEATURES**




- UL Recognized
- Rugged Construction
- Choice of Termination





### **DIMENSIONS** In inches (and millimeters)

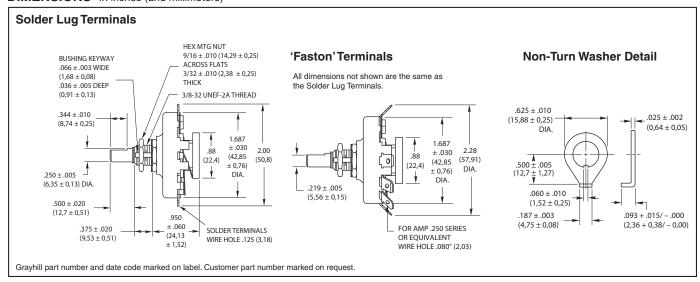

# **SPECIFICATIONS**

# **Electrical Rating**

Rated: UL Recognition: File Number E35289 15 Amps, 120 Vac, non-inductive load. One Amp, 120 Vdc, non-inductive load.

Additional Grayhill Rating: 7.5 Amps, 220 Vac, non-inductive load.

This rating is based on the following criteria: Overload—50 operations at 125% rated ac load and 150% rated DC load.

Endurance—6000 operations at rated load with 900 Vac dielectric strength before and after test.

Temperature Rise-Not to exceed 30°C when carrying rated ac load after endurance test. Contacts will carry 20 Amps at 115 volts AC with 30°C maximum temperature rise.

Contact Resistance: (Measured at 2 Vdc and approximately 100 mA) for new switch approximately 10 milliohms.

Insulation Resistance: Approximately 100,000 Mohms. Between mutually insulated parts. Voltage Breakdown: Approximately 2500 Vac

between mutually insulated parts.

### **Materials and Finishes** Rotor Contact: Silver alloy

Stator Contact: Silver alloy Shaft: 303 Stainless steel Stop Rivet: Steel, tin/zinc-plated Mounting Bushing: Brass, tin/zinc-plated Base and Drive Hub: Heat resistant, electrical grade phenolic.

Mounting Nut: Brass, tin/zinc-plated or stainless steel.

Detent Mechanism: Brass, silver-plated "Faston" Terminal: Brass, silver-plated Solder Terminal: Brass, silver-plated

Mounting Hardware: One mounting nut 9/16" across flats, 3/32" thick and one non-turn washer (see detail) are supplied with each switch.

#### **Additional Characteristics**

Single Pole, Single Deck: 2 to 11 positions plus common 30° Indexing.

Contacts: Non-shorting type

Stops: A rivet provides the fixed stop on all switches. Minimum number of positions is 2, and maximum is 11. Terminal 12, the common, is isolated from rotation.

Rotational Torque: 12 to 36 ounchinches on average for new switches. Contact Force: Approximately 12 ounces Shaft Flat Orientation: Opposite point of contact (see circuit diagram).

#### Circuit Diagram viewed from shaft end with switch in position #1



**ACCESSORIES** 

Non-Turn Washer

Brass, tin/zinc-plated washer, detailed above may be purchased as a separate item. Part No. 19C1014.

# **ORDERING INFORMATION**

Part Numbers: Designate as follows, using the 2 digits after the dash to indicate the number of positions.

#### For Faston Terminal:

Use 19101-02UL through 19101-11UL

### For Solder Terminal:

Use 19001-02UL through 19001-11UL

Specials: Not available through Distributors. For special shafts, bushings, etc. contact Grayhill.

# Available from your local Grayhill Distributor.

For prices and discounts, contact a local Sales Office, an authorized local Distributor or Grayhill.