

HiPerFRED

V_{RRM} = 600 V
 I_{DAV} = 22 A
 t_{rr} = 30 ns


High Performance Fast Recovery Diode

Low Loss and Soft Recovery

1~ Rectifier Bridge


Part number

FBE22-06N1

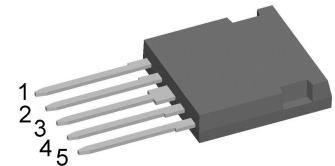

Backside: isolated

 E72873

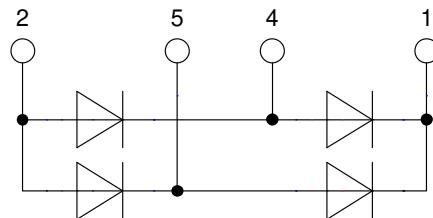

Features / Advantages:

- Planar passivated chips
- Very low leakage current
- Very short recovery time
- Improved thermal behaviour
- Very low I_{rm} -values
- Very soft recovery behaviour
- Avalanche voltage rated for reliable operation
- Soft reverse recovery for low EMI/RFI
- Low I_{rm} reduces:
 - Power dissipation within the diode
 - Turn-on loss in the commutating switch

Applications:

- Rectifiers in switch mode power supplies (SMPS)

Package: i4-Pac

- Isolation Voltage: 3000 V~
- Industry convenient outline
- RoHS compliant
- Epoxy meets UL 94V-0
- Soldering pins for PCB mounting
- Backside: DCB ceramic
- Reduced weight
- Advanced power cycling

Disclaimer Notice


Information furnished is believed to be accurate and reliable. However, users should independently evaluate the suitability of and test each product selected for their own applications. Littelfuse products are not designed for, and may not be used in, all applications. Read complete Disclaimer Notice at www.littelfuse.com/disclaimer-electronics.

Fast Diode

Symbol	Definition	Conditions	Ratings			
			min.	typ.	max.	
V_{RSM}	max. non-repetitive reverse blocking voltage	$T_{VJ} = 25^\circ\text{C}$			600	V
V_{RRM}	max. repetitive reverse blocking voltage	$T_{VJ} = 25^\circ\text{C}$			600	V
I_R	reverse current, drain current	$V_R = 600 \text{ V}$ $V_R = 600 \text{ V}$	$T_{VJ} = 25^\circ\text{C}$ $T_{VJ} = 150^\circ\text{C}$		60 0.25	μA mA
V_F	forward voltage drop	$I_F = 11 \text{ A}$	$T_{VJ} = 25^\circ\text{C}$		2.13	V
		$I_F = 22 \text{ A}$			2.35	V
		$I_F = 11 \text{ A}$	$T_{VJ} = 150^\circ\text{C}$		1.44	V
		$I_F = 22 \text{ A}$			1.71	V
I_{DAV}	bridge output current	$T_C = 115^\circ\text{C}$ rectangular $d = 0.5$	$T_{VJ} = 175^\circ\text{C}$		22	A
V_{F0} r_F	threshold voltage slope resistance } for power loss calculation only		$T_{VJ} = 175^\circ\text{C}$		1.04 24	V $\text{m}\Omega$
R_{thJC}	thermal resistance junction to case				3	K/W
R_{thCH}	thermal resistance case to heatsink			0.2		K/W
P_{tot}	total power dissipation	$T_C = 25^\circ\text{C}$			50	W
I_{FSM}	max. forward surge current	$t = 10 \text{ ms}; (50 \text{ Hz}), \text{sine}; V_R = 0 \text{ V}$	$T_{VJ} = 45^\circ\text{C}$		50	A
C_J	junction capacitance	$V_R = 400 \text{ V}$ $f = 1 \text{ MHz}$	$T_{VJ} = 25^\circ\text{C}$		6	pF
I_{RM}	max. reverse recovery current		$T_{VJ} = 25^\circ\text{C}$ $T_{VJ} = 100^\circ\text{C}$	3.5 6		A A
t_{rr}	reverse recovery time	$I_F = 10 \text{ A}; V_R = 300 \text{ V}$ $-di_F/dt = 200 \text{ A}/\mu\text{s}$	$T_{VJ} = 25^\circ\text{C}$ $T_{VJ} = 100^\circ\text{C}$	30 90		ns ns


Package i4-Pac


Symbol	Definition	Conditions	min.	typ.	max.	Unit
I_{RMS}	RMS current	per terminal			35	A
T_{VJ}	virtual junction temperature		-55		175	°C
T_{op}	operation temperature		-55		150	°C
T_{stg}	storage temperature		-55		150	°C
Weight				6		g
F_c	mounting force with clip		20		120	N
$d_{Spp/App}$	creepage distance on surface / striking distance through air	terminal to terminal	1.7			mm
$d_{Spb/Apb}$		terminal to backside	5.1			mm
V_{ISOL}	isolation voltage	t = 1 second t = 1 minute 50/60 Hz, RMS; $I_{ISOL} \leq 1$ mA	3000 2500			V

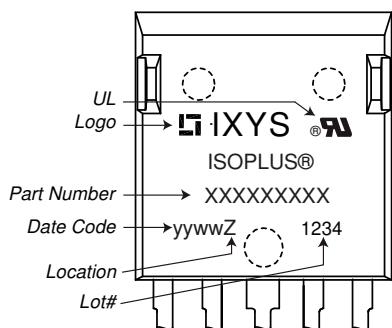Product Marking


Ordering	Ordering Number	Marking on Product	Delivery Mode	Quantity	Code No.
Standard	FBE22-06N1	FBE22-06N1	Tube	25	484954


Equivalent Circuits for Simulation
* on die level
 $T_{VJ} = 175^\circ\text{C}$

	Fast Diode	
$V_{0\max}$	threshold voltage	1.04 V
$R_{0\max}$	slope resistance *	21 mΩ

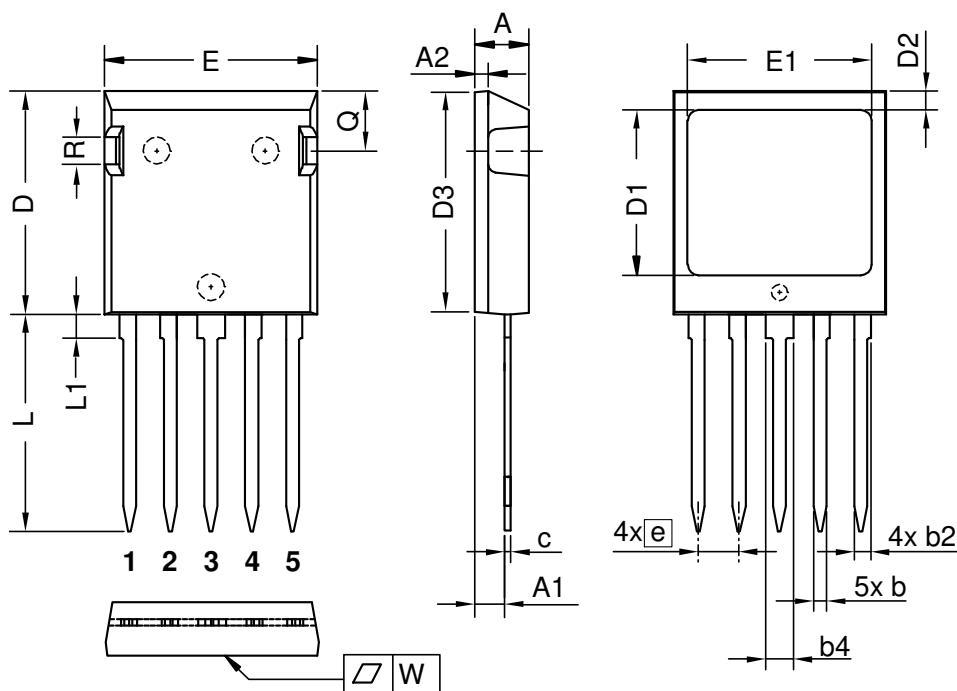Outlines i4-Pac


Dim.	Millimeter		Inches	
	min	max	min	max
A	4.83	5.21	0.190	0.205
A1	2.59	3.00	0.102	0.118
A2	1.17	2.16	0.046	0.085
b	1.14	1.40	0.045	0.055
b2	1.47	1.73	0.058	0.068
b4	2.54	2.79	0.100	0.110
c	0.51	0.74	0.020	0.029
D	20.80	21.34	0.819	0.840
D1	14.99	15.75	0.590	0.620
D2	1.65	2.03	0.065	0.080
D3	20.30	20.70	0.799	0.815
E	19.56	20.29	0.770	0.799
E1	16.76	17.53	0.660	0.690
e	3.81	BSC	0.150	BSC
L	19.81	21.34	0.780	0.840
L1	2.11	2.59	0.083	0.102
Q	5.33	6.20	0.210	0.244
R	2.54	4.57	0.100	0.180
W	-	0.10	-	0.004

Die konkav Form des Substrates ist typ. < 0.05 mm über der Kunststoffoberfläche der Bauteilunterseite
The concave bow of substrate is typ. < 0.05 mm over plastic surface level of device bottom side

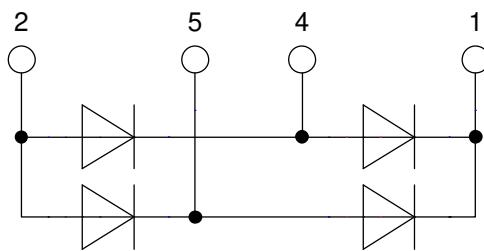

Fast Diode

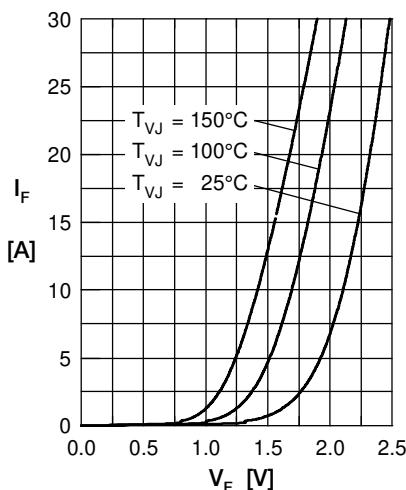


Fig. 1 Forward current
 I_F versus V_F

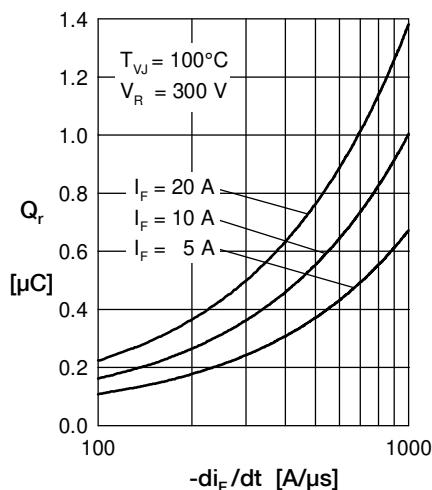


Fig. 2 Typ. reverse recov. charge
 Q_r versus $-di_F/dt$

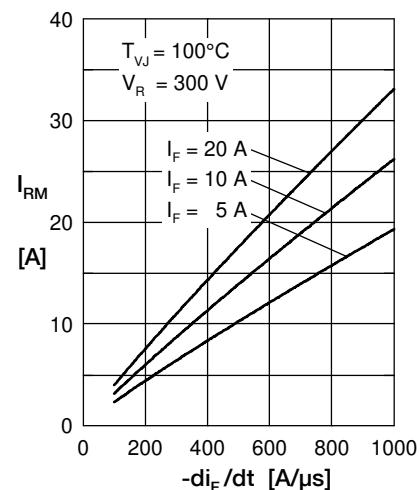


Fig. 3 Typ. peak reverse current
 I_{RM} versus $-di_F/dt$

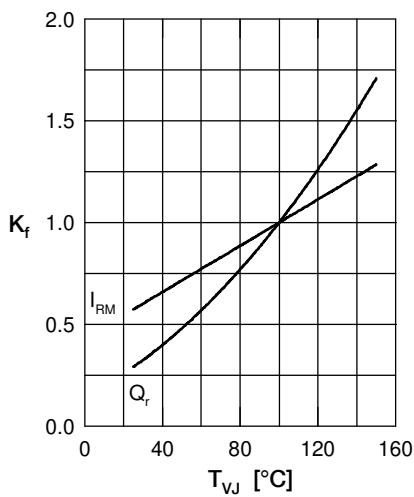


Fig. 4 Dynamic parameters
 Q_r , I_{RM} versus T_{VJ}

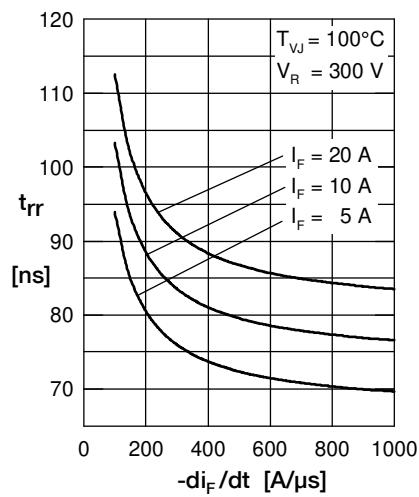


Fig. 5 Typ. recovery time
 t_{rr} versus $-di_F/dt$

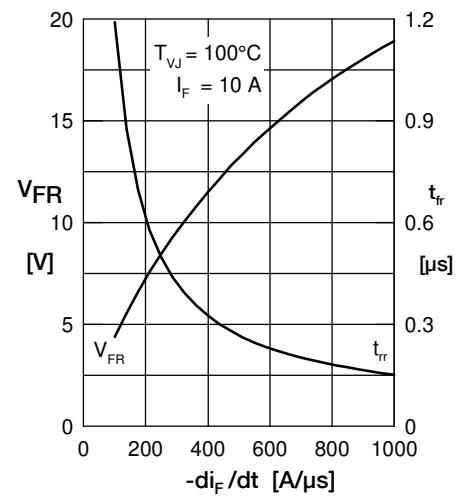


Fig. 6 Typ. peak forward voltage
 V_{FR} and t_{trr} versus $-di_F/dt$

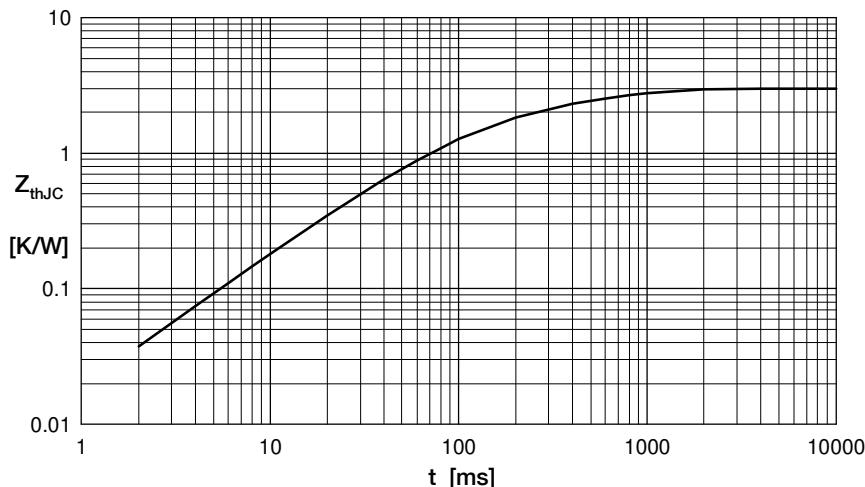


Fig. 7 Transient thermal impedance junction to case

Constants for Z_{thJC} calculation:

i	R_{thi} [K/W]	t_i [s]
1	1.3590	0.1015
2	0.4651	0.1026
3	0.8473	0.4919
4	0.8473	0.6200