

# Thyristor Module

$V_{RRM} = 2 \times 1400 \text{ V}$


$I_{TAV} = 216 \text{ A}$

$V_T = 1.1 \text{ V}$

## Phase leg


### Part number

**MCC200-14io1**

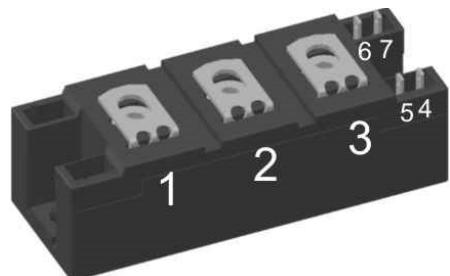

Backside: isolated

 E72873

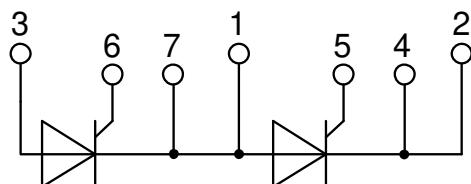

### Features / Advantages:

- Thyristor for line frequency
- Planar passivated chip
- Long-term stability
- Direct Copper Bonded Al<sub>2</sub>O<sub>3</sub>-ceramic

### Applications:

- Line rectifying 50/60 Hz
- Softstart AC motor control
- DC Motor control
- Power converter
- AC power control
- Lighting and temperature control

### Package: Y4

- Isolation Voltage: 3600 V~
- Industry standard outline
- RoHS compliant
- Soldering pins for PCB mounting
- Base plate: DCB ceramic
- Reduced weight
- Advanced power cycling

### Disclaimer Notice


Information furnished is believed to be accurate and reliable. However, users should independently evaluate the suitability of and test each product selected for their own applications. Littelfuse products are not designed for, and may not be used in, all applications. Read complete Disclaimer Notice at [www.littelfuse.com/disclaimer-electronics](http://www.littelfuse.com/disclaimer-electronics).

**Thyristor**

Symbol	Definition	Conditions	Ratings			
			min.	typ.	max.	
$V_{RSM/DSM}$	max. non-repetitive reverse/forward blocking voltage	$T_{VJ} = 25^\circ C$			1500	V
$V_{RRM/DRM}$	max. repetitive reverse/forward blocking voltage	$T_{VJ} = 25^\circ C$			1400	V
$I_{R/D}$	reverse current, drain current	$V_{R/D} = 1400 V$ $V_{R/D} = 1400 V$	$T_{VJ} = 25^\circ C$ $T_{VJ} = 125^\circ C$		400 15	$\mu A$ mA
$V_T$	forward voltage drop	$I_T = 200 A$	$T_{VJ} = 25^\circ C$		1.20	V
		$I_T = 400 A$			1.52	V
		$I_T = 200 A$ $I_T = 400 A$	$T_{VJ} = 125^\circ C$		1.10 1.50	V
$I_{TAV}$	average forward current	$T_C = 85^\circ C$	$T_{VJ} = 125^\circ C$		216	A
$I_{T(RMS)}$	RMS forward current	180° sine			340	A
$V_{T0}$	threshold voltage	$r_T$ slope resistance } for power loss calculation only	$T_{VJ} = 125^\circ C$		0.80	V
	slope resistance				1.4	$m\Omega$
$R_{thJC}$	thermal resistance junction to case				0.13	K/W
$R_{thCH}$	thermal resistance case to heatsink			0.05		K/W
$P_{tot}$	total power dissipation		$T_C = 25^\circ C$		770	W
$I_{TSM}$	max. forward surge current	$t = 10 \text{ ms}; (50 \text{ Hz}), \text{sine}$	$T_{VJ} = 45^\circ C$		8.00	kA
		$t = 8,3 \text{ ms}; (60 \text{ Hz}), \text{sine}$	$V_R = 0 V$		8.64	kA
		$t = 10 \text{ ms}; (50 \text{ Hz}), \text{sine}$	$T_{VJ} = 125^\circ C$		6.80	kA
		$t = 8,3 \text{ ms}; (60 \text{ Hz}), \text{sine}$	$V_R = 0 V$		7.35	kA
$I^2t$	value for fusing	$t = 10 \text{ ms}; (50 \text{ Hz}), \text{sine}$	$T_{VJ} = 45^\circ C$		320.0	$kA^2s$
		$t = 8,3 \text{ ms}; (60 \text{ Hz}), \text{sine}$	$V_R = 0 V$		310.5	$kA^2s$
		$t = 10 \text{ ms}; (50 \text{ Hz}), \text{sine}$	$T_{VJ} = 125^\circ C$		231.2	$kA^2s$
		$t = 8,3 \text{ ms}; (60 \text{ Hz}), \text{sine}$	$V_R = 0 V$		224.4	$kA^2s$
$C_J$	junction capacitance	$V_R = 400 V$ $f = 1 \text{ MHz}$	$T_{VJ} = 25^\circ C$	366		pF
$P_{GM}$	max. gate power dissipation	$t_p = 30 \mu s$	$T_C = 125^\circ C$		120	W
		$t_p = 500 \mu s$			60	W
					20	W
$P_{GAV}$	average gate power dissipation					
$(di/dt)_{cr}$	critical rate of rise of current	$T_{VJ} = 125^\circ C; f = 50 \text{ Hz}$ repetitive, $I_T = 600 A$			100	$A/\mu s$
		$t_p = 200 \mu s; di_G/dt = 0.5 A/\mu s;$				
		$I_G = 0.5 A; V = \frac{2}{3} V_{DRM}$ non-repet., $I_T = 200 A$			500	$A/\mu s$
$(dv/dt)_{cr}$	critical rate of rise of voltage	$V = \frac{2}{3} V_{DRM}$	$T_{VJ} = 125^\circ C$		1000	$V/\mu s$
		$R_{GK} = \infty$ ; method 1 (linear voltage rise)				
$V_{GT}$	gate trigger voltage	$V_D = 6 V$	$T_{VJ} = 25^\circ C$		2	V
			$T_{VJ} = -40^\circ C$		3	V
$I_{GT}$	gate trigger current	$V_D = 6 V$	$T_{VJ} = 25^\circ C$		150	mA
			$T_{VJ} = -40^\circ C$		220	mA
$V_{GD}$	gate non-trigger voltage	$V_D = \frac{2}{3} V_{DRM}$	$T_{VJ} = 125^\circ C$		0.25	V
$I_{GD}$	gate non-trigger current				10	mA
$I_L$	latching current	$t_p = 30 \mu s$	$T_{VJ} = 25^\circ C$		200	mA
		$I_G = 0.5 A; di_G/dt = 0.5 A/\mu s$				
$I_H$	holding current	$V_D = 6 V$ $R_{GK} = \infty$	$T_{VJ} = 25^\circ C$		150	mA
$t_{gd}$	gate controlled delay time	$V_D = \frac{1}{2} V_{DRM}$	$T_{VJ} = 25^\circ C$		2	$\mu s$
		$I_G = 0.5 A; di_G/dt = 0.5 A/\mu s$				
$t_q$	turn-off time	$V_R = 100 V; I_T = 300 A; V = \frac{2}{3} V_{DRM}$ $T_{VJ} = 100^\circ C$		200		$\mu s$
		$di/dt = 10 A/\mu s$ $dv/dt = 50 V/\mu s$ $t_p = 200 \mu s$				

**Package Y4**

Conditions			min.	typ.	max.	Unit
$I_{RMS}$	<i>RMS current</i>	per terminal			300	A
$T_{VJ}$	<i>virtual junction temperature</i>		-40		125	°C
$T_{op}$	<i>operation temperature</i>		-40		100	°C
$T_{stg}$	<i>storage temperature</i>		-40		125	°C
<b>Weight</b>				150		g
$M_D$	<i>mounting torque</i>		2.25		2.75	Nm
$M_T$	<i>terminal torque</i>		4.5		5.5	Nm
$d_{Spp/App}$	<i>creepage distance on surface / striking distance through air</i>		<i>terminal to terminal</i>	14.0	10.0	mm
$d_{Spb/Apb}$			<i>terminal to backside</i>	16.0	16.0	mm
$V_{ISOL}$	<i>isolation voltage</i>	$t = 1 \text{ second}$ $t = 1 \text{ minute}$	50/60 Hz, RMS; $I_{ISOL} \leq 1 \text{ mA}$		3600 3000	V V

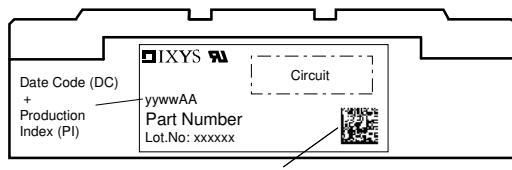


Data Matrix: part no. (1-19), DC + PI (20-25), lot.no.# (26-31), blank (32), serial no.#(33-36)


Ordering	Ordering Number	Marking on Product	Delivery Mode	Quantity	Code No.
Standard	MCC200-14io1	MCC200-14io1	Box	6	497452

**Equivalent Circuits for Simulation**

\* on die level





$T_{VJ} = 125^\circ\text{C}$

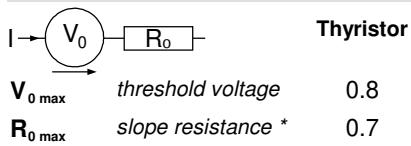

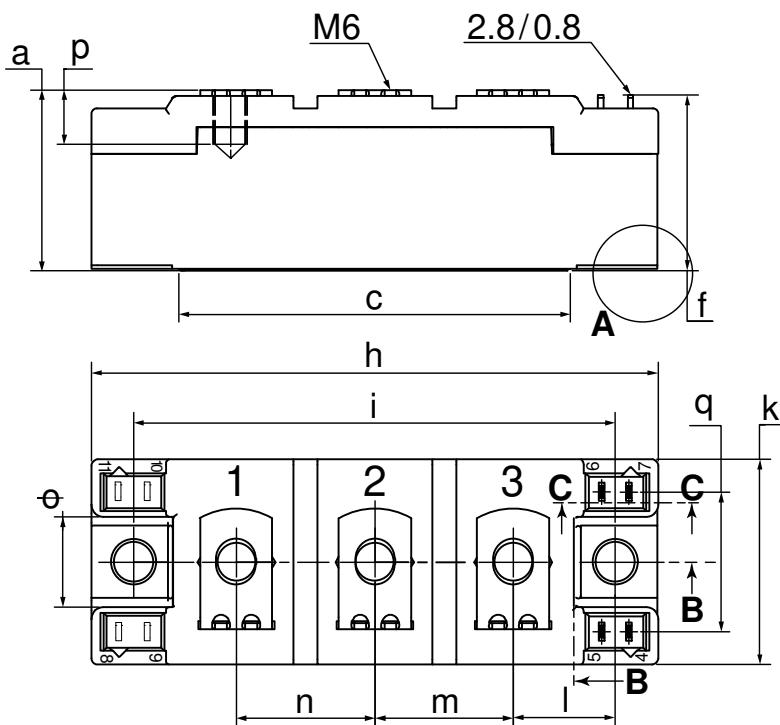**Outlines Y4**


Optional accessories for modules  
Keyed gate/cathode twin plugs with wire length = 350 mm, gate = white, cathode = red  
Type ZY 180L (L = Left for pin pair 4/5)      Type ZY 180R (R = Right for pin pair 6/7)  
{ UL 758, style 3751 }

Dim.	MIN [mm]	MAX [mm]	MIN [inch]	MAX [inch]
a	30.0	30.6	1.181	1.205
b	typ. 0.25		typ. 0.010	
c	64.0	65.0	2.520	2.559
d	6.5	7.0	0.256	0.275
e	4.9	5.1	0.193	0.201
f	28.6	29.2	1.126	1.150
g	7.3	7.7	0.287	0.303
h	93.5	94.5	3.681	3.720
i	79.5	80.5	3.130	3.169
j	4.8	5.2	0.189	0.205
k	33.4	34.0	1.315	1.339
l	16.7	17.3	0.657	0.681
m	22.7	23.3	0.894	0.917
n	22.7	23.3	0.894	0.917
o	14.0	15.0	0.551	0.591
p	typ. 10.5		typ. 0.413	
q	22.8	23.3	0.898	0.917
r	1.8	2.4	0.071	0.041

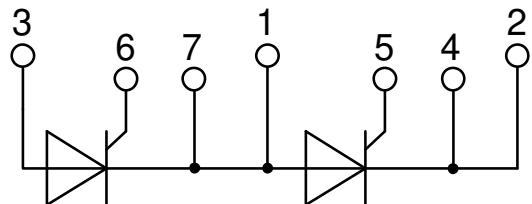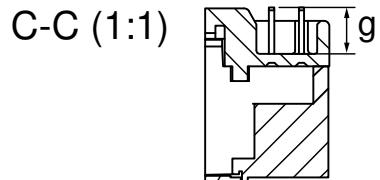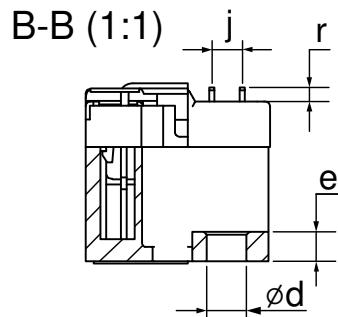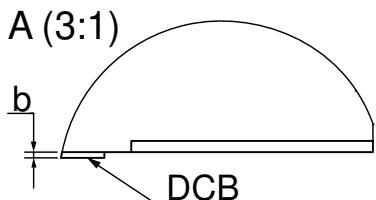

## Thyristor

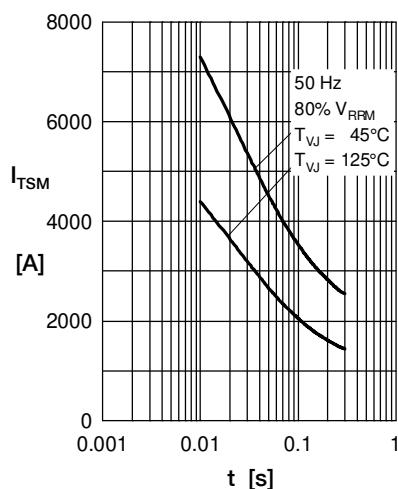


Fig. 1 Surge overload current  $I_{TSM}$ ,  
 $I_{FSM}$ : Crest value,  $t$ : duration

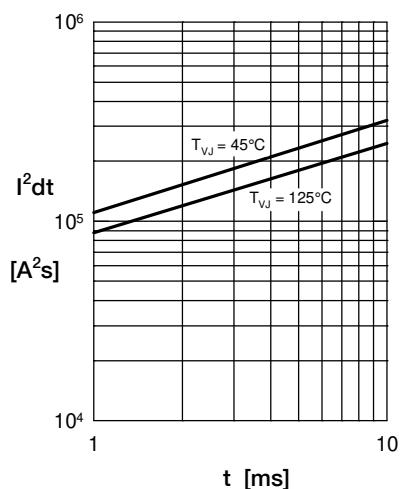


Fig. 2  $I^2t$  versus time (1-10 ms)

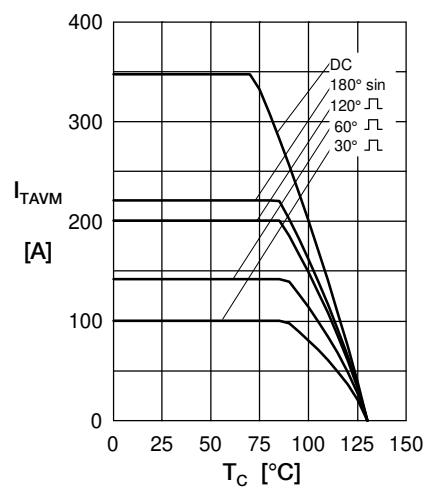


Fig. 3 Max. forward current at case temperature

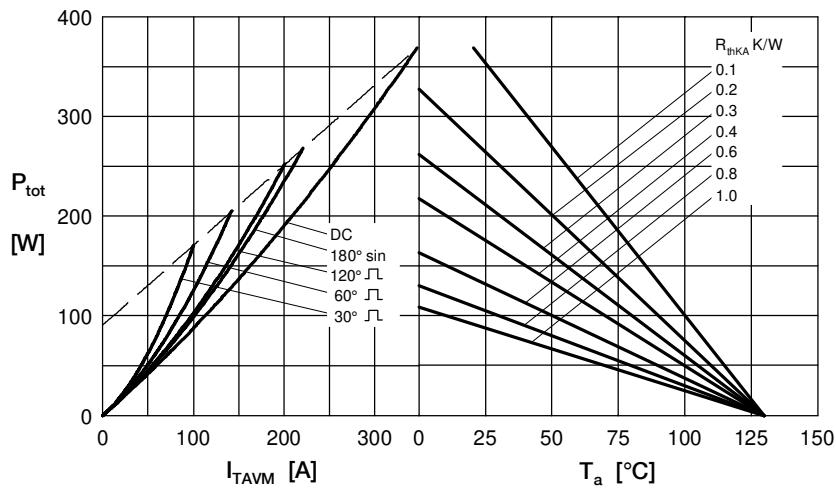


Fig. 4 Power dissipation vs. on-state current & ambient temperature (per thyristor or diode)

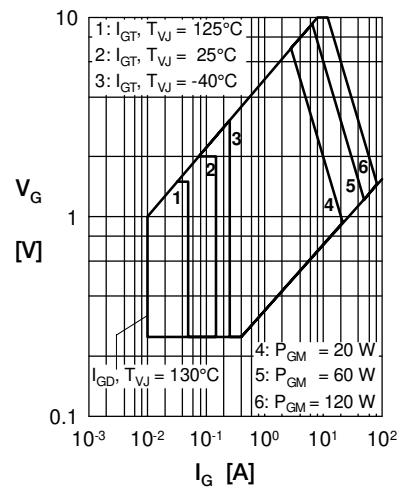


Fig. 5 Gate trigger characteristics

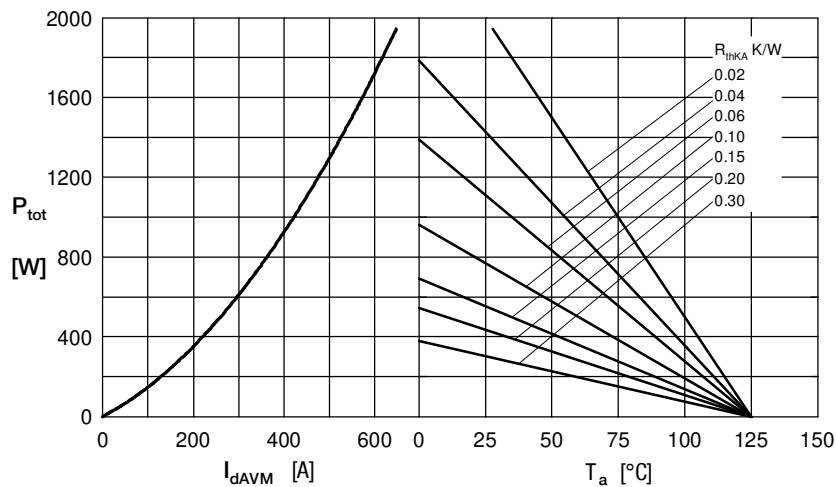


Fig. 6 Three phase rectifier bridge: Power dissipation versus direct output current and ambient temperature

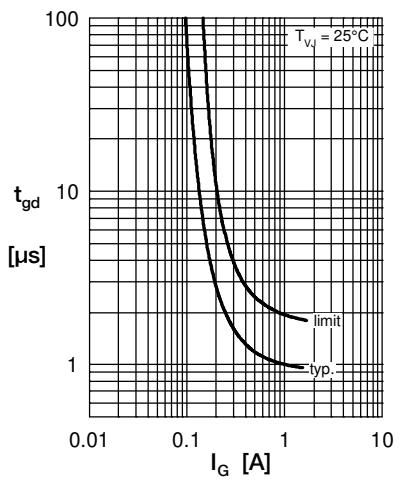


Fig. 7 Gate trigger delay time

## Thyristor


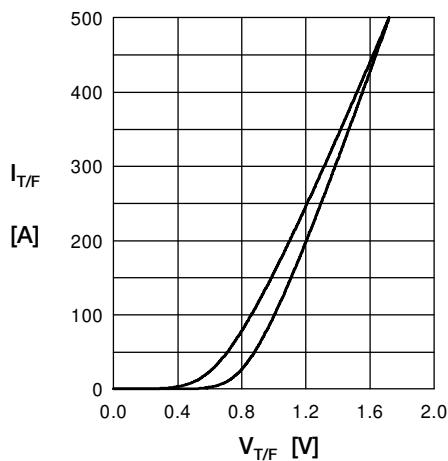


Fig. 8 Forward current versus voltage drop

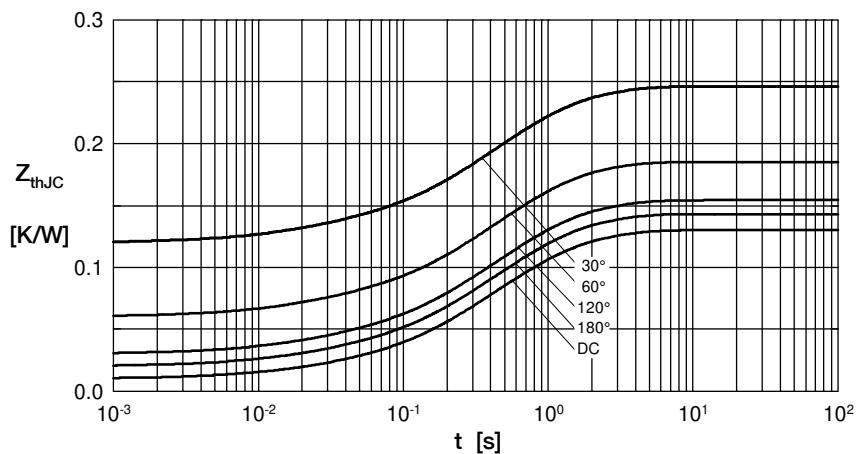

Constants for  $Z_{thJC}$  calculation:

i	$R_{thi}$ [K/W]	$t_i$ [s]
1	0.0100	0.00014
2	0.0065	0.019
3	0.0250	0.180
4	0.0615	0.520
5	0.0270	1.600

Fig. 9 Transient thermal impedance junction to case at various conduction angles

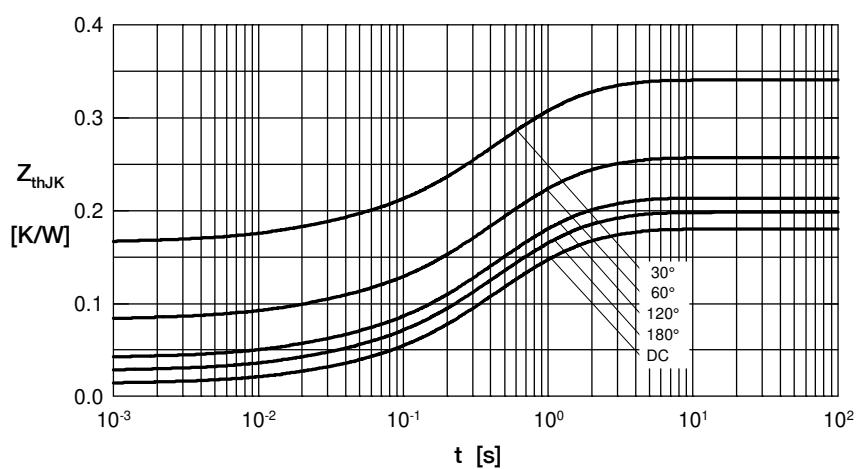


Fig. 10 Transient thermal impedance junction to heatsink (per thyristor/diode)