





THIS IS A C.A.D. GENERATED DRAWING  
DO NOT MAKE MANUAL REVISIONS TO MASTER.



ISSUE NUMBER
ORIGINAL ①



- MATERIALS:**
- HOUSING: PBT, UL94V-0
  - WIRE-HOUSING SEAL: SILICON RUBBER
- SPECIFICATIONS:**
- PITCH: 2.0MM
  - RATED VOLTAGE: 250V
  - RATED CURRENT: 2A MAX
  - WITHSTAND VOLTAGE: AC 1000V R.M.S.
  - CONTACT RESISTANCE: 10 mOHMS MAX
  - INSULATION RESISTANCE:  
1000 MOHMS MIN/DC 500V
  - TEMPERATURE RANGE: -40°C ~ +105°C
  - WATERPROOF GRADE: TESTED AND  
CERTIFIED TO IP67

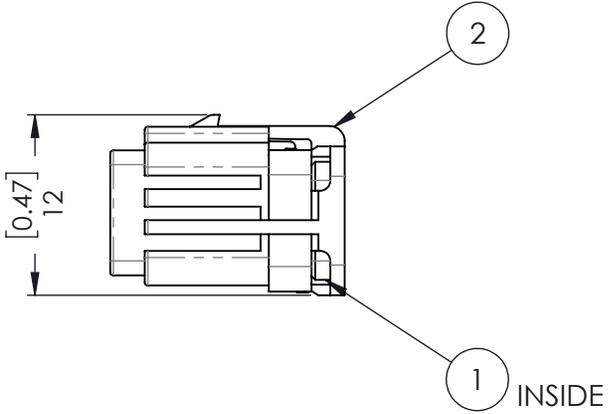

ITEM NO.	DESCRIPTION	QTY.
1	566 6PIN Rear Seal Blue	1
2	566-210-006-XXX Femal Housing	1
<b>566 SERIES 6 SOCKET WATERPROOF CONNECTOR</b>		ACAD REFERENCE NO. 566 ASSEMBLY
		DRAWN: R.STA.MONICA      DATE: NOV.02/10
		CHECKED:      DATE:
		SCALE: NOT TO SCALE      SHEET 1 OF 1
 <b>EDAC INC</b> TORONTO, ONTARIO CANADA YOUR CONNECTION TO QUALITY & SERVICE		DRAWING NUMBER <b>566-006-000-810</b>
		ISSUE <b>1</b>
THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF EDAC INC. AND SHALL NOT BE REPRODUCED, OR COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.		



THIS SERIES FULLY CONFORMS TO THE  
EUROPEAN UNION DIRECTIVES 2002/95/EC  
AND 2002/96/EC FOR RoHS COMPLIANCY