THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.


| Material | High Conductivity Seamless Copper Tube | | |
|---|--|--|--|
| Plating | Electro-Tin | | |
| Wire Size | 1 AWG | | |
| Wire Type | Stranded Copper; Class B: Compact, Compressed or Concentric, Class C: Concentric | | |
| Wire Strip Length | 1-7/16 in. | | |
| Stud Size | 1/4 in. | | |
| UL Listed Wire Connector | Yes, for applications up to 35kv. Consult cable manufacturer for voltage stress relief instructions with applications greater than 2000 volts. | | |
| UL Temperature Rating | 90° C | | |
| C.S.A Certified Wire Connector | Yes | | |
| Panduit Color Code on Barrel | GREEN | | |
| Panduit Die Index No. on Barrel | P37 | | |
| Alternate Industry Die Index No. () on Barrel | (11) | | |





CERTIFIED LISTED

Wire Connector

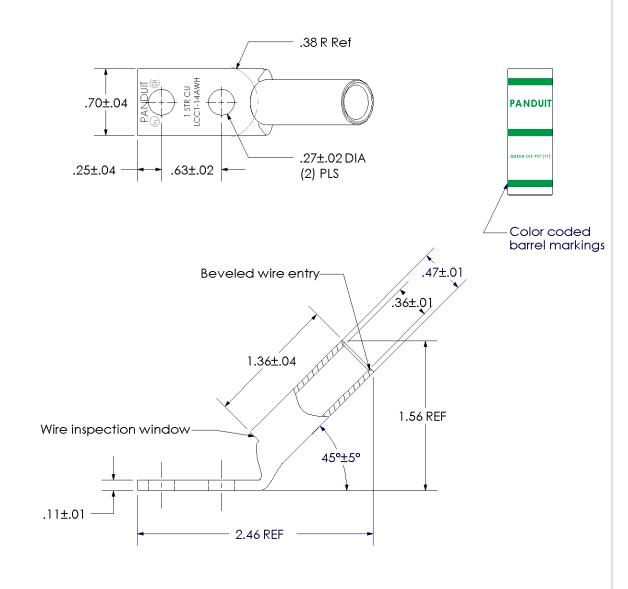

| | | | | | | CORP. TINLEY PARK, ILLINOIS |
|-----|------|-----|-----|-------------|-------|--|
| 00 | 7/02 | SAB | DRL | RELEASED | 10341 | LCC1-14AWH-E Copper Lug - Two-Hole, Long Barrel with Window, 45° Angle Tongue |
| REV | DATE | BY | снк | DESCRIPTION | ECN | SCALE N/A DRAWING NO / CAD FILE LCC1-14AWH-CUST |