


D2VW

Sealed Miniature Basic Switch

Sealed Miniature Basic Switch Conforms to IP67 (Excluding the terminals on terminal models)

- Use of epoxy resin assures stable sealing, making this switch ideal for places subject to water spray or excessive dust.
- V-series internal mechanism assures high precision and durability. The mounting is the same as of the V models.
- Ideal for automobiles, agricultural machines, large-scale home appliances, and industrial equipment, which require high environmental resistance.

RoHS Compliant

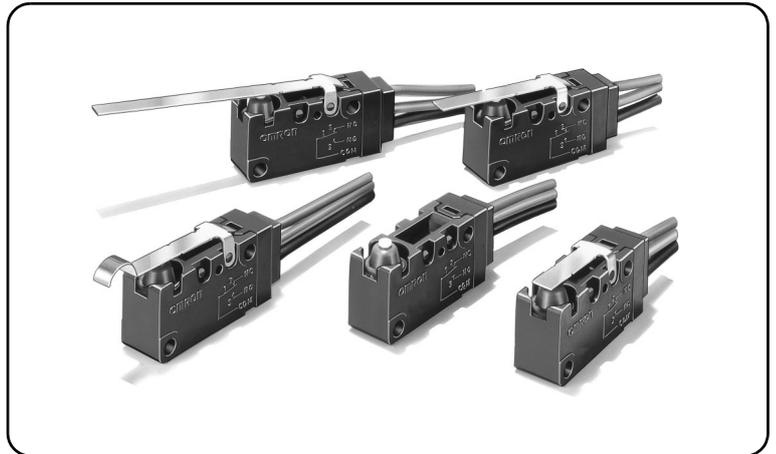

D
2
V
W

Model Number Legend

D2VW - 1 2 3 4 5

1. Ratings

5 : 250 VAC 5 A
01 : 30 VDC 0.1 A

2. Actuator

None : Pin plunger
L1A : Short hinge lever
L1 : Hinge lever
L1B : Long hinge lever
L2A : Short hinge roller lever
L2 : Hinge roller lever
L3 : Simulated roller hinge lever

3. Contact form

-1 : SPDT
-2 : SPST-NC
-3 : SPST-NO

4. Terminals

None, HS : Solder terminals
M, MS : Molded lead wires

Note: UL/cUL approved versions are available.

In this case, HS, MS will be added to the end of the model number
UL/cUL approved models have UL approved wiring (AWG20 UL1015).

Consult your OMRON sales representative for details.

5. Length of the molded lead wire

None : 300 mm
-0 : 1,000 mm

List of Models

| Actuator | Terminals | Ratings Contact form | 5 A | 0.1 A | |
|--|---|-------------------------|-----------------|-----------------|-------------|
| | | | | | |
| Pin plunger  | Solder terminals | SPDT | D2VW-5-1 | D2VW-01-1 | |
| | | SPST-NC | D2VW-5-2 | D2VW-01-2 | |
| | | SPST-NO | D2VW-5-3 | D2VW-01-3 | |
| | Molded lead wires (300 mm) | SPDT | D2VW-5-1M | D2VW-01-1M | |
| | | SPST-NC | D2VW-5-2M | D2VW-01-2M | |
| | | SPST-NO | D2VW-5-3M | D2VW-01-3M | |
| Molded lead wires (1,000 mm) | SPDT | D2VW-5-1M-0 | D2VW-01-1M-0 | | |
| Short hinge lever  | Solder terminals | SPDT | D2VW-5L1A-1 | D2VW-01L1A-1 | |
| | | SPST-NC | D2VW-5L1A-2 | D2VW-01L1A-2 | |
| | | SPST-NO | D2VW-5L1A-3 | D2VW-01L1A-3 | |
| | Molded lead wires (300 mm) | SPDT | D2VW-5L1A-1M | D2VW-01L1A-1M | |
| | | SPST-NC | D2VW-5L1A-2M | D2VW-01L1A-2M | |
| | | SPST-NO | D2VW-5L1A-3M | D2VW-01L1A-3M | |
| | Molded lead wires (1,000 mm) | SPDT | D2VW-5L1A-1M-0 | D2VW-01L1A-1M-0 | |
| | Hinge lever  | Solder terminals | SPDT | D2VW-5L1-1 | D2VW-01L1-1 |
| | | | SPST-NC | D2VW-5L1-2 | D2VW-01L1-2 |
| SPST-NO | | | D2VW-5L1-3 | D2VW-01L1-3 | |
| Molded lead wires (300 mm) | | SPDT | D2VW-5L1-1M | D2VW-01L1-1M | |
| | | SPST-NC | D2VW-5L1-2M | D2VW-01L1-2M | |
| | | SPST-NO | D2VW-5L1-3M | D2VW-01L1-3M | |
| Molded lead wires (1,000 mm) | SPDT | D2VW-5L1-1M-0 | D2VW-01L1-1M-0 | | |
| Long hinge lever  | Solder terminals | SPDT | D2VW-5L1B-1 | D2VW-01L1B-1 | |
| | | SPST-NC | D2VW-5L1B-2 | D2VW-01L1B-2 | |
| | | SPST-NO | D2VW-5L1B-3 | D2VW-01L1B-3 | |
| | Molded lead wires (300 mm) | SPDT | D2VW-5L1B-1M | D2VW-01L1B-1M | |
| | | SPST-NC | D2VW-5L1B-2M | D2VW-01L1B-2M | |
| | | SPST-NO | D2VW-5L1B-3M | D2VW-01L1B-3M | |
| Molded lead wires (1,000 mm) | SPDT | D2VW-5L1B-1M-0 | D2VW-01L1B-1M-0 | | |
| Short hinge roller lever  | Solder terminals | SPDT | D2VW-5L2A-1 | D2VW-01L2A-1 | |
| | | SPST-NC | D2VW-5L2A-2 | D2VW-01L2A-2 | |
| | | SPST-NO | D2VW-5L2A-3 | D2VW-01L2A-3 | |
| | Molded lead wires (300 mm) | SPDT | D2VW-5L2A-1M | D2VW-01L2A-1M | |
| | | SPST-NC | D2VW-5L2A-2M | D2VW-01L2A-2M | |
| | | SPST-NO | D2VW-5L2A-3M | D2VW-01L2A-3M | |
| Molded lead wires (1,000 mm) | SPDT | D2VW-5L2A-1M-0 | D2VW-01L2A-1M-0 | | |
| Hinge roller lever  | Solder terminals | SPDT | D2VW-5L2-1 | D2VW-01L2-1 | |
| | | SPST-NC | D2VW-5L2-2 | D2VW-01L2-2 | |
| | | SPST-NO | D2VW-5L2-3 | D2VW-01L2-3 | |
| | Molded lead wires (300 mm) | SPDT | D2VW-5L2-1M | D2VW-01L2-1M | |
| | | SPST-NC | D2VW-5L2-2M | D2VW-01L2-2M | |
| | | SPST-NO | D2VW-5L2-3M | D2VW-01L2-3M | |
| Molded lead wires (1,000 mm) | SPDT | D2VW-5L2-1M-0 | D2VW-01L2-1M-0 | | |
| Simulated roller hinge lever  | Solder terminals | SPDT | D2VW-5L3-1 | D2VW-01L3-1 | |
| | | SPST-NC | D2VW-5L3-2 | D2VW-01L3-2 | |
| | | SPST-NO | D2VW-5L3-3 | D2VW-01L3-3 | |
| | Molded lead wires (300 mm) | SPDT | D2VW-5L3-1M | D2VW-01L3-1M | |
| | | SPST-NC | D2VW-5L3-2M | D2VW-01L3-2M | |
| | | SPST-NO | D2VW-5L3-3M | D2VW-01L3-3M | |
| Molded lead wires (1,000 mm) | SPDT | D2VW-5L3-1M-0 | D2VW-01L3-1M-0 | | |

Separator (Sold Separately), Actuator (Sold Separately), Terminal Connector (Sold Separately) ➔ Refer to "Basic Switch Common Accessories"


●Safety Standard Approved Models

| Actuator | Terminals | Ratings Contact form | 5A | 0.1A |
|--|----------------------------|-------------------------|----------------------|-----------------------|
| | | | | |
| Pin plunger  | Solder terminals | SPDT | D2VW-5-1HS | D2VW-01-1HS |
| | Molded lead wires (300 mm) | | D2VW-5-1MS | D2VW-01-1MS |
| Short hinge lever  | Solder terminals | | D2VW-5L1A-1HS | D2VW-01L1A-1HS |
| | Molded lead wires (300 mm) | | D2VW-5L1A-1MS | D2VW-01L1A-1MS |
| Hinge lever  | Solder terminals | | D2VW-5L1-1HS | D2VW-01L1-1HS |
| | Molded lead wires (300 mm) | | D2VW-5L1-1MS | D2VW-01L1-1MS |
| Long hinge lever  | Solder terminals | | D2VW-5L1B-1HS | D2VW-01L1B-1HS |
| | Molded lead wires (300 mm) | | D2VW-5L1B-1MS | D2VW-01L1B-1MS |
| Short hinge roller lever  | Solder terminals | | D2VW-5L2A-1HS | D2VW-01L2A-1HS |
| | Molded lead wires (300 mm) | | D2VW-5L2A-1MS | D2VW-01L2A-1MS |
| Hinge roller lever  | Solder terminals | | D2VW-5L2-1HS | D2VW-01L2-1HS |
| | Molded lead wires (300 mm) | | D2VW-5L2-1MS | D2VW-01L2-1MS |
| Simulated roller lever  | Solder terminals | | D2VW-5L3-1HS | D2VW-01L3-1HS |
| | Molded lead wires (300 mm) | | D2VW-5L3-1MS | D2VW-01L3-1MS |


D
2
V
W

Contact Form


●SPDT

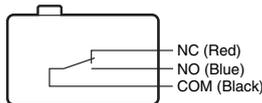

●SPST-NC

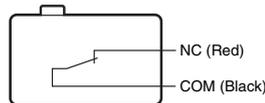

●SPST-NO

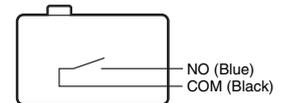

The color in parentheses indicates the color of the lead wire.

Contact Specifications

| Item | Model | D2VW-5 models | D2VW-01 models |
|---|----------------------|---------------|----------------|
| Contact | Specification | Rivet | Crossbar |
| | Material | Silver alloy | Gold alloy |
| | Gap (standard value) | 0.5 mm | |
| Inrush current | NC | 15A max. | - |
| | NO | 15A max. | - |
| Minimum applicable load (reference value) * | | 5 VDC 160 mA | 5 VDC 1 mA |

* Please refer to "Using Micro Loads" in "●Precautions" for more information on the minimum applicable load.

Ratings

| Model | Item Rated voltage | Resistive load |
|----------------|-----------------------|----------------|
| D2VW-5 models | 250 VAC | 5 A |
| | 125 VAC | 5 A |
| | 30 VDC | 5 A |
| D2VW-01 models | 125 VAC | 0.1 A |
| | 30 VDC | 0.1 A |

Note. The above rating values apply under the following test conditions.

- (1) Ambient temperature: 20±2°C
- (2) Ambient humidity: 65±5%
- (3) Operating frequency: 30 operations/min

Approved Safety Standards

UL (UL61058-1)/cUL (CSA C22.2 No.61058-1)

The terminal specification for models with UL/cUL safety standard certification is "HS" or "MS."

| Rated voltage | Model | D2VW-5 | D2VW-01 |
|--------------------|-------|--------|---------|
| 125 VAC 250 VAC | | 3 A | 0.1 A |
| | | 3 A | - |
| 30 VDC | | - | 0.1 A |

VDE (EN61058-1)

The models in the *List of Models* on the previous page are not certified for VDE standards.

Contact your OMRON representative if you require certified models.

| Rated voltage | Model | D2VW-5 | D2VW-01 |
|--------------------|-------|--------|---------|
| 125 VAC 250 VAC | | - | 0.1 A |
| | | 3 A | - |

Testing conditions: D2VW-5 25E3 (25,000 operations)
T55 (0 to 55°C)
D2VW-01 1E5 (100,000 operations)
T85 (0 to 85°C)

Separator (Sold Separately), Actuator (Sold Separately), Terminal Connector (Sold Separately) ➔ Refer to "Micro Switch Common Accessories"


Characteristics

| Item | Model | D2VW-5 models | D2VW-01 models |
|---|--|--|---|
| Permissible operating speed | | 0.1mm to 1m/s (for pin plunger models) | |
| Permissible operating frequency | Mechanical | 300 operations/min | |
| | Electrical | 60 operations/min | |
| Insulation resistance | | 100 MΩ min. (500 VDC with insulation tester) | |
| Contact resistance (initial value) | Terminal models | 50 mΩ max. | |
| | Molded lead wire terminals (300mm) | 100 mΩ max. | |
| | Molded lead wire terminals (1,000mm) | 200 mΩ max. | |
| Dielectric strength *1 | Between terminals of the same polarity | 1,000 VAC 50/60 Hz for 1 min | |
| | Between current-carrying metal parts and ground | 1,500 VAC 50/60 Hz for 1 min | |
| | Between terminals and non-current-carrying metal parts | 1,500 VAC 50/60 Hz for 1 min | |
| Vibration resistance *2 | Malfunction | 10 to 55 Hz, 1.5 mm double amplitude | |
| Shock resistance | Destruction | 1,000m/s ² (approx. 100G) max. | |
| | Malfunction *2 | 300m/s ² (approx. 30G) max. | |
| Durability *3 | Mechanical | 10,000,000 operations min. (60 operations/min) | |
| | Electrical | 100,000 operations min. (30 operations/min) | 1,000,000 operations min. (30 operations/min) |
| Degree of protection | Terminal models | IEC IP67 (excluding the terminals on terminal models) | |
| | Molded lead wire models | IEC IP67 | |
| Degree of protection against electric shock | | Class I | |
| Proof tracking index (PTI) | | 175 | |
| Ambient operating temperature | | -40°C to +85°C (at ambient humidity of 60% max.) (with no icing or condensation) | |
| Ambient operating humidity | | 95% max. (for +5°C to +35°C) | |
| Weight | | Approx. 7 g (for pin plunger models with terminals) | |

Note. The data given above are initial values.

- *1. The dielectric strength shown in the table indicates the value for models with a Separator (refer to "Basic Switch Common Accessories").
- *2. For the pin plunger models, the above values apply for use at the free position and total travel position. For the lever models, they apply at the total travel position. Close or open circuit of the contact is 1 ms max.
- *3. For testing conditions, consult your OMRON sales representative.

Mounting Holes (Unit: mm)

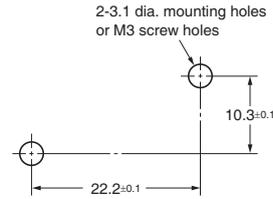

D
2
V
W

Dimensions (Unit: mm) and Operating Characteristics

Models with solder terminals



The illustrations and dimensions are for pin plunger models.

Dimensions and operation characteristics of other actuator models are the same as those of molded lead wires models.

● Pin Plunger Models

D2VW-5-1

D2VW-01-1

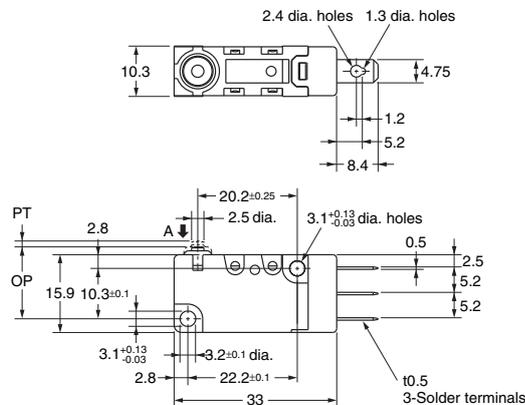

| | | | |
|-----------------------|----|------|-----------------|
| Operating Force | OF | Max. | 1.96 N {200 gf} |
| Releasing Force | RF | Min. | 0.29 N {30 gf} |
| Pretravel | PT | Max. | 1.2 mm |
| Overtravel | OT | Min. | 1.0 mm |
| Movement Differential | MD | Max. | 0.4 mm |
| Operating Position | OP | | 14.7±0.4 mm |

Note 1. Unless otherwise specified, a tolerance of ±0.4 mm applies to all dimensions.



Note 2. The operating characteristics are for operation in the A direction (↓).

Models with molded lead wires

The illustration and drawing shown is the SPDT model. SPST-NC model and SPST-NO model are omitted.

●Pin Plunger Models

- D2VW-5-1M
- D2VW-5-1M-0
- D2VW-01-1M
- D2VW-01-1M-0

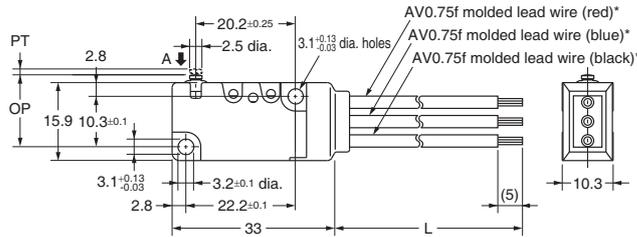

Dimensions



| | 300 mm type | 1,000 mm type |
|---|-------------|---------------|
| L | 300±10 | 1,000±30 |

| | | |
|-----------------------|---------|-----------------|
| Operating Force | OF Max. | 1.96 N {200 gf} |
| Releasing Force | RF Min. | 0.29 N {30 gf} |
| Pretravel | PT Max. | 1.2 mm |
| Overtravel | OT Min. | 1.0 mm |
| Movement Differential | MD Max. | 0.4 mm |
| Operating Position | OP | 14.7±0.4 mm |

* UL/cUL approved models have UL approved wiring (AWG20 UL1015).

●Short Hinge Lever Models

- D2VW-5L1A-1M
- D2VW-5L1A-1M-0
- D2VW-01L1A-1M
- D2VW-01L1A-1M-0

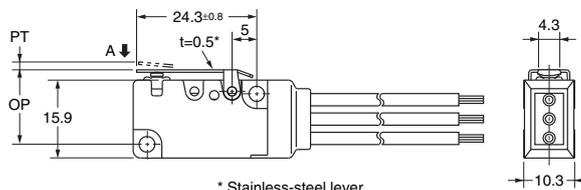



* Stainless-steel lever

| | | |
|-----------------------|---------|-----------------|
| Operating Force | OF Max. | 1.96 N {200 gf} |
| Releasing Force | RF Min. | 0.20 N {20 gf} |
| Pretravel | PT Max. | 1.6 mm |
| Overtravel | OT Min. | 0.8 mm |
| Movement Differential | MD Max. | 0.5 mm |
| Operating Position | OP | 15.2±0.5 mm |

●Hinge Lever Models

- D2VW-5L1-1M
- D2VW-5L1-1M-0
- D2VW-01L1-1M
- D2VW-01L1-1M-0

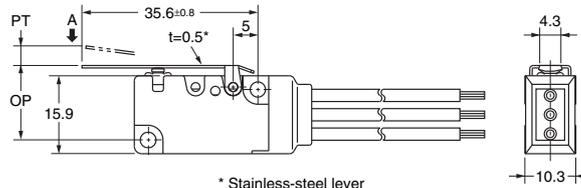
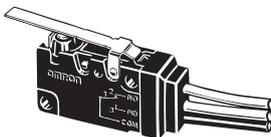


* Stainless-steel lever

| | | |
|-----------------------|---------|-----------------|
| Operating Force | OF Max. | 1.18 N {120 gf} |
| Releasing Force | RF Min. | 0.15 N {15 gf} |
| Pretravel | PT Max. | 4.0 mm |
| Overtravel | OT Min. | 1.6 mm |
| Movement Differential | MD Max. | 0.8 mm |
| Operating Position | OP | 15.2±1.2 mm |

●Long Hinge Lever Models

- D2VW-5L1B-1M
- D2VW-5L1B-1M-0
- D2VW-01L1B-1M
- D2VW-01L1B-1M-0

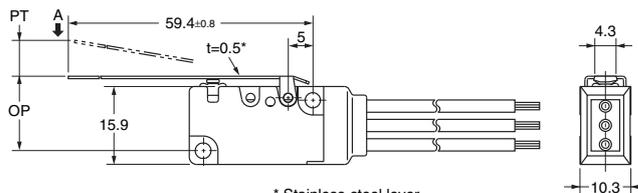
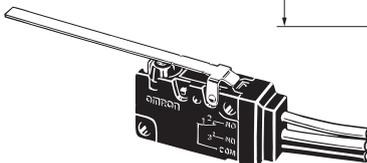


* Stainless-steel lever

| | | |
|-----------------------|---------|----------------|
| Operating Force | OF Max. | 0.59 N {60 gf} |
| Releasing Force | RF Min. | 0.05 N {5 gf} |
| Pretravel | PT Max. | 9.0 mm |
| Overtravel | OT Min. | 3.2 mm |
| Movement Differential | MD Max. | 2.0 mm |
| Operating Position | OP | 15.2±2.6 mm |

●Simulated Roller Lever Hinge Models

- D2VW-5L3-1M
- D2VW-5L3-1M-0
- D2VW-01L3-1M
- D2VW-01L3-1M-0

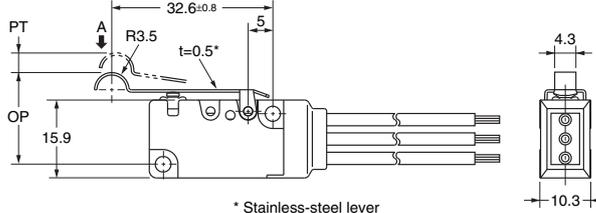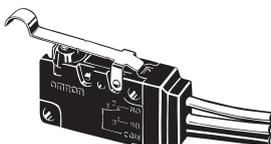

* Stainless-steel lever

| | | |
|-----------------------|---------|-----------------|
| Operating Force | OF Max. | 1.18 N {120 gf} |
| Releasing Force | RF Min. | 0.15 N {15 gf} |
| Pretravel | PT Max. | 4.0 mm |
| Overtravel | OT Min. | 1.6 mm |
| Movement Differential | MD Max. | 0.8 mm |
| Operating Position | OP | 18.7±1.2 mm |



Note 1. Unless otherwise specified, a tolerance of ±0.4 mm applies to all dimensions.

Note 2. The operating characteristics are for operation in the A direction (↓).

Models with molded lead wires

●Short Hinge Roller Lever Models

- D2VW-5L2A-1M
- D2VW-5L2A-1M-0
- D2VW-01L2A-1M
- D2VW-01L2A-1M-0

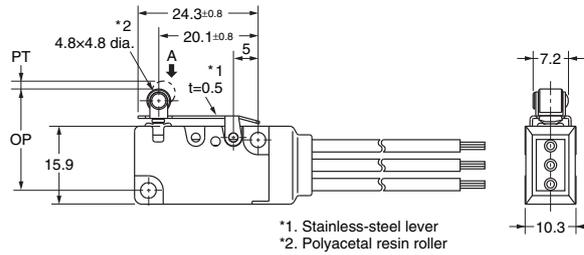



| | | | |
|-----------------------|----|------|-----------------|
| Operating Force | OF | Max. | 2.25 N {230 gf} |
| Releasing Force | RF | Min. | 0.20 N {20 gf} |
| Pretravel | PT | Max. | 1.6 mm |
| Overtravel | OT | Min. | 0.8 mm |
| Movement Differential | MD | Max. | 0.5 mm |
| Operating Position | OP | | 20.7±0.6 mm |

D
2
V
W

●Hinge roller lever

- D2VW-5L2-1M
- D2VW-5L2-1M-0
- D2VW-01L2-1M
- D2VW-01L2-1M-0

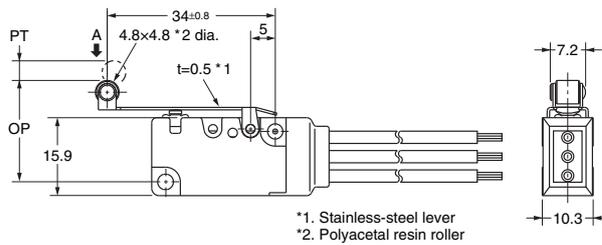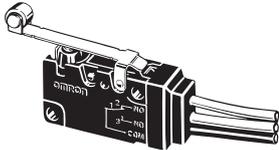

| | | | |
|-----------------------|----|------|-----------------|
| Operating Force | OF | Max. | 1.18 N {120 gf} |
| Releasing Force | RF | Min. | 0.15 N {15 gf} |
| Pretravel | PT | Max. | 4.0 mm |
| Overtravel | OT | Min. | 1.6 mm |
| Movement Differential | MD | Max. | 0.8 mm |
| Operating Position | OP | | 20.7±1.2 mm |

Note 1. Unless otherwise specified, a tolerance of ± 0.4 mm applies to all dimensions.

Note 2. The operating characteristics are for operation in the A direction (↓).

Precautions

★Please refer to "Basic Switches Common Precautions" for correct use.

Cautions

●Degree of Protection

Do not use the Switch underwater.
The Switch was tested and found to meet the conditions necessary to meet the following standard, however, the test checks for water intrusion after immersion for a specified time period, not for switching operation underwater.

JIS C0920:

Degrees of protection provided by enclosures of electrical apparatus (IP Code)

IEC 60529:

Degrees of protection provided by enclosures (IP Code)

Degree of protection: IP67

(check water intrusion after immersion for 30 min submerged 1 m underwater)

●Protection Against Chemicals

Prevent the Switch from coming into contact with oil or chemicals.

Otherwise, damage to or deterioration of Switch materials may result.

●Soldering

- Connecting to Solder Terminals

When soldering the lead wire to the terminal, first insert the lead wire conductor through the terminal hole and then conduct soldering.

Complete the soldering at the iron tip temperature between 350 to 400°C within 5 seconds, and do not apply any external force for 1 minute after soldering. Soldering at a excessively high temperature or soldering for more than 5 s may deteriorate the characteristics of the Switch.


Correct Use

●Mounting

Use M3 mounting screw with plane washers or spring washers to securely mount the Switch. Tighten the screws to a torque of 0.39 to 0.59 N·m {4 to 6 kgf·cm}.

●Operating Body

With the pin plunger models, set the Switch so that the plunger can be pushed in from directly above. Since the plunger is covered with a rubber cap, applying a force from lateral directions may cause damage to the plunger or reduction in the sealing capability.

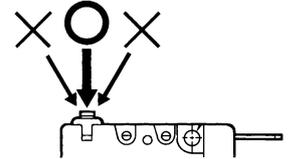

●Handling


Handle the Switch carefully so as not to break the sealing rubber.

●Using Micro Loads

Using a model for ordinary loads to open or close the contact of a micro load circuit may result in faulty contact. Use models that operate in the following range. However, even when using micro load models within the following operating range, if inrush current occurs when the contact is opened or closed, it may increase the contact wear and so decrease durability. Therefore, insert a contact protection circuit where necessary. The N-level reference value applies for the minimum applicable load. This value indicates the malfunction reference level for the reliability level of 60% (λ_{60}).

(JIS C5003)

The equation, $\lambda_{60}=0.5 \times 10^{-6} / \text{operations}$ indicates that the estimated malfunction rate is less than $\frac{1}{2,000,000}$ operations with a reliability level of 60%.

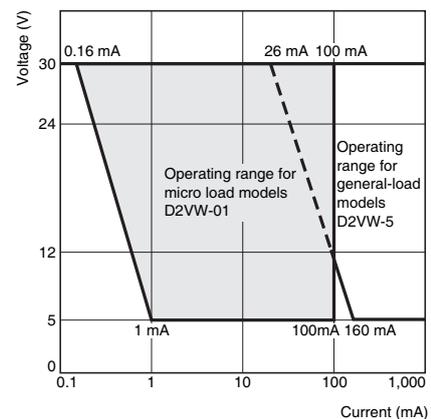

Please check each region's Terms & Conditions by region website.

OMRON Corporation Electronic and Mechanical Components Company

Regional Contact

Americas

<https://www.components.omron.com/>

Asia-Pacific

<https://ecb.omron.com.sg/>

Korea

<https://www.omron-ecb.co.kr/>

Europe

<http://components.omron.eu/>

China

<https://www.ecb.omron.com.cn/>

Japan

<https://www.omron.co.jp/ecb/>